


**WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
TIMBER SALE
TRACT 11 - 25 OTTERS SLIDE
T42 R5E SECTIONS 1,2 T43 R5E SECTIONS 36
HARVEST ACRES - 44**





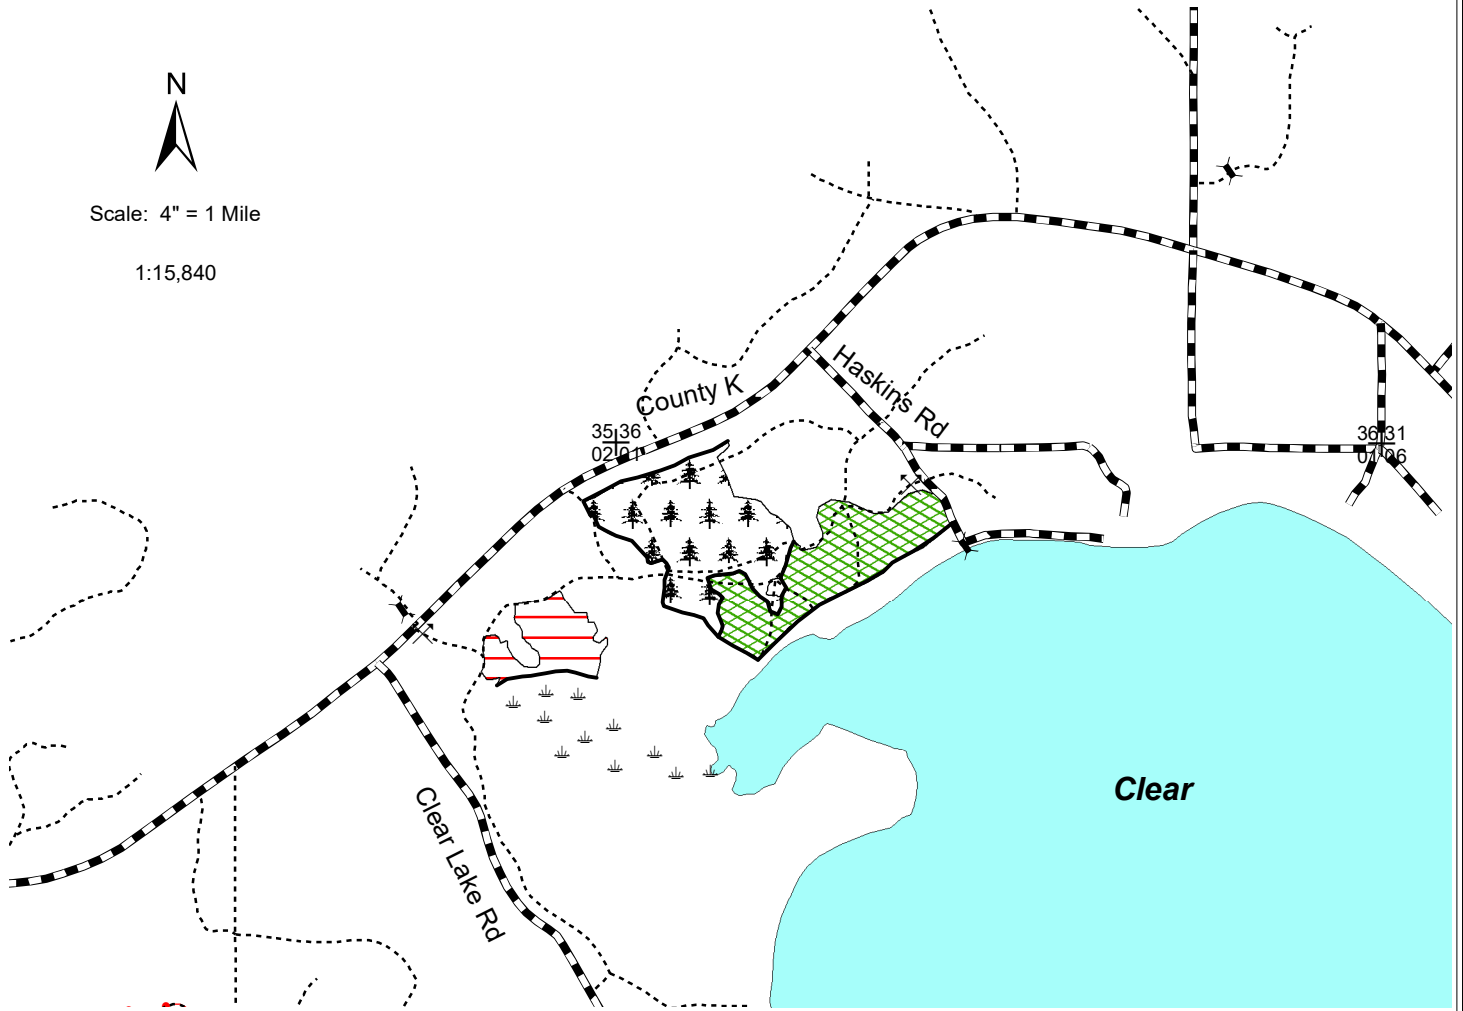









Scale: 4" = 1 Mile

1:15,840



Legend

-  Survey Marker
-  Gates
-  Berms
-  Section Corner
-  Keg/Swamp
-  Woods Roads
-  Red Line
-  Snowmobile Trails
-  Highways and Town Roads
-  Lakes

-  Pine Shelterwood (21 acres): Cut all pine marked with orange paint and all aspen, maple, birch, fir greater than 1".
-  Hardwood Shelterwood (16 acres): Cut all fir, birch and unmarked maple.
-  Pine Thinning (7 acres): Cut all orange marked red pine. Cut all white pine, fir, aspen, and birch.

Note: Do NOT cut trees marked with green paint.

Cut all large overstory white pine in Pine Thinning area greater than 15' away from wetland edges.

Harvesting operation allowed between July 16 - April 14.

Map produced by
Ben Broquard, 02/25



This map is for informational purposes only and may not have been prepared for or be suitable for legal, engineering or surveying purposes. The user is solely responsible for verifying the accuracy of information before using for any purpose. By using this product for any purpose user agrees to be bound by all disclaimers found here: <https://dnr.wisconsin.gov/legal>.

NH-ALSF TRACT NO. 11-25

Otterslide

The cutting area is approximately 44 acres.

All trees that will yield one or more 100-inch sticks to the minimum 4" top diameter will be cut and utilized.

	<u>ESTIMATED VOLUME (TONS)</u>
	<u>MINIMUM TOP DIAMETER</u>
<u>SPECIES</u>	<u>4"</u>
Red Pine ¹	710
Balsam Fir	85
Mixed Hardwood ²	810

Total Minimum Bid Value \$ 31,970.00

Red Pine¹ – Contains approximately 460 tons of red pine and approximately 250 tons of white pine. Includes approximately 70 MBF red pine and 40 MBF white pine.

Mixed Hardwood²– Contains approximately 660 tons of sugar maple, 105 tons of red maple, 40 tons of aspen and 5 tons of white birch. Includes approximately 5 MBF of sugar maple logs.

Note sale volume equates to 35 tons/acre or approximately 15 cords per acre. Volumes above reflect utilization to 4" top.

Administering Forester – Ben Broquard : (715)586-9215 : benjamin.broquard@wisconsin.gov

Special Conditions:

1. Harvesting operations allowed between July 16 – April 14.
2. Cutting must be concurrent for all species to be harvested.
3. Do not cut, knock down, or utilize any dead trees unless they pose an operational safety risk.
4. All landings and any new roads must be approved prior to sale start up. All roads must be cleared of debris and leveled upon sale completion.
5. Slash must be lopped and scattered to lie within two feet of the ground. No trees shall be felled across any redline, or into any wetland areas. Trees must be pulled back inside the sale boundary.
6. Follow WI BMP's for water quality at all times. No equipment is allowed within 15 feet of ephemeral ponds or wetlands. Do not deposit slash or tops into wetlands.
7. All pine products cut between April 1 and September 1 must be removed from the sale area within three weeks from the time of cutting. Pine products cut during the remainder of the year must be removed prior to April 1 of each year.
8. If the contract is to be worked on during multiple time periods a mid-contract "pull-off" inspection meeting will be required. One-week notice shall be given by the contractor prior to moving equipment off-site. During the "pull-off" inspection provisions needing attention will be documented. The contractor at this time can decide to remedy them before pulling off or rectify them when moving back onto the site. If the latter is chosen documented items shall be addressed before harvesting can continue.

Notice: Completion of this form is mandatory. The Department will not recognize your bid unless you complete and submit this form. Personal information collected will be used for program administration and may be provided to requesters as required by Wisconsin's Public Records law [ss. 19.31-19.39, Wis. Stats.].

Date

Bidder Name

Street Address	City	State	ZIP Code
----------------	------	-------	----------

Property Name (if any) Northern Highland-American Legion	Timber Sale Name Otterslide	Tract Number 11-25
-------------------------------------------------------------	--------------------------------	-----------------------

Date and Hour of Bid Opening May 7, 2025 1:30pm Boulder Junction Community Center	Minimum Acceptable Bid (optional) \$31,970.00
--------------------------------------------------------------------------------------	--------------------------------------------------

Species-All bids including Lump Sum bids must be by species	Utilization Specifications (4 inch/Whole Tree/Logs)	Estimated Volume	Volume Units (tons/cords/mbf)	Price Bid Per Unit	Total Bid Value on Estimated Volume
Red Pine	4 inch	710	tons		
Balsam Fir	4 inch	85	ton		
Mixed Hardwood	4 inch	810	tons		

The award shall be based on this TOTAL BID AMOUNT:

Performance Bond

Will be in the form of: (select one)

- | | |
|----------------------------------------------------|-----------------------------------------------------|
| <input type="radio"/> Personal Check | <input type="radio"/> Assurance Bond |
| <input type="radio"/> Certified Check/Money Order | <input type="radio"/> Certificate of Deposit |
| <input type="radio"/> Irrevocable Letter of Credit | <input type="radio"/> Assignment of Savings Account |

I understand that any or all bids may be rejected and that consideration and awarding of a contract will be based upon my past performance and ability to complete contracts. **I also understand that if I am the winning bidder, I have 6 weeks from the date of the bid opening to submit an acceptable performance bond. I also understand that if I am awarded the contract and fail to execute it or work under it, I will be required to forfeit to the Department an amount equal to 10% of my total bid amount.** Failure to forfeit the 10% penalty will result in being considered ineligible to bid on any state timber sales for a two-year duration. In the event the highest bidder can not or will not sign the contract, the award may be made to the next highest qualified bid.

By checking this box, I certify that I hold a Wisconsin Master Logger Certification.

Notice: I understand:

Utilization specifications and estimated volumes are listed in the prospectus which is available upon request from the Department.

A copy of the standard timber sales contract which must be entered into is available upon request from the Department.

Signature of Bidder
Bidder's Name (Please Print or Type)
Phone Number (include area code)
Email Address