


# Residential Sampling Update

## Madison Kipp Corp. & Neighboring Properties

March 2012 Results – Not to Scale

- House with installed mitigation system
  - Testing by MKC Contractor Arcadis
  - Testing by DNR Contractor BT Squared
- Bold** – Results Above Action Level

- ▲ Sub-Slab Vapor & Indoor Air Sampling Completed – *Results Available on Next Page*
- ▲ Sub-Slab Vapor & Indoor Air Sampling: *Access Requested or Results Pending*
- ▲ Indoor Air-Only Sampling Results Pending

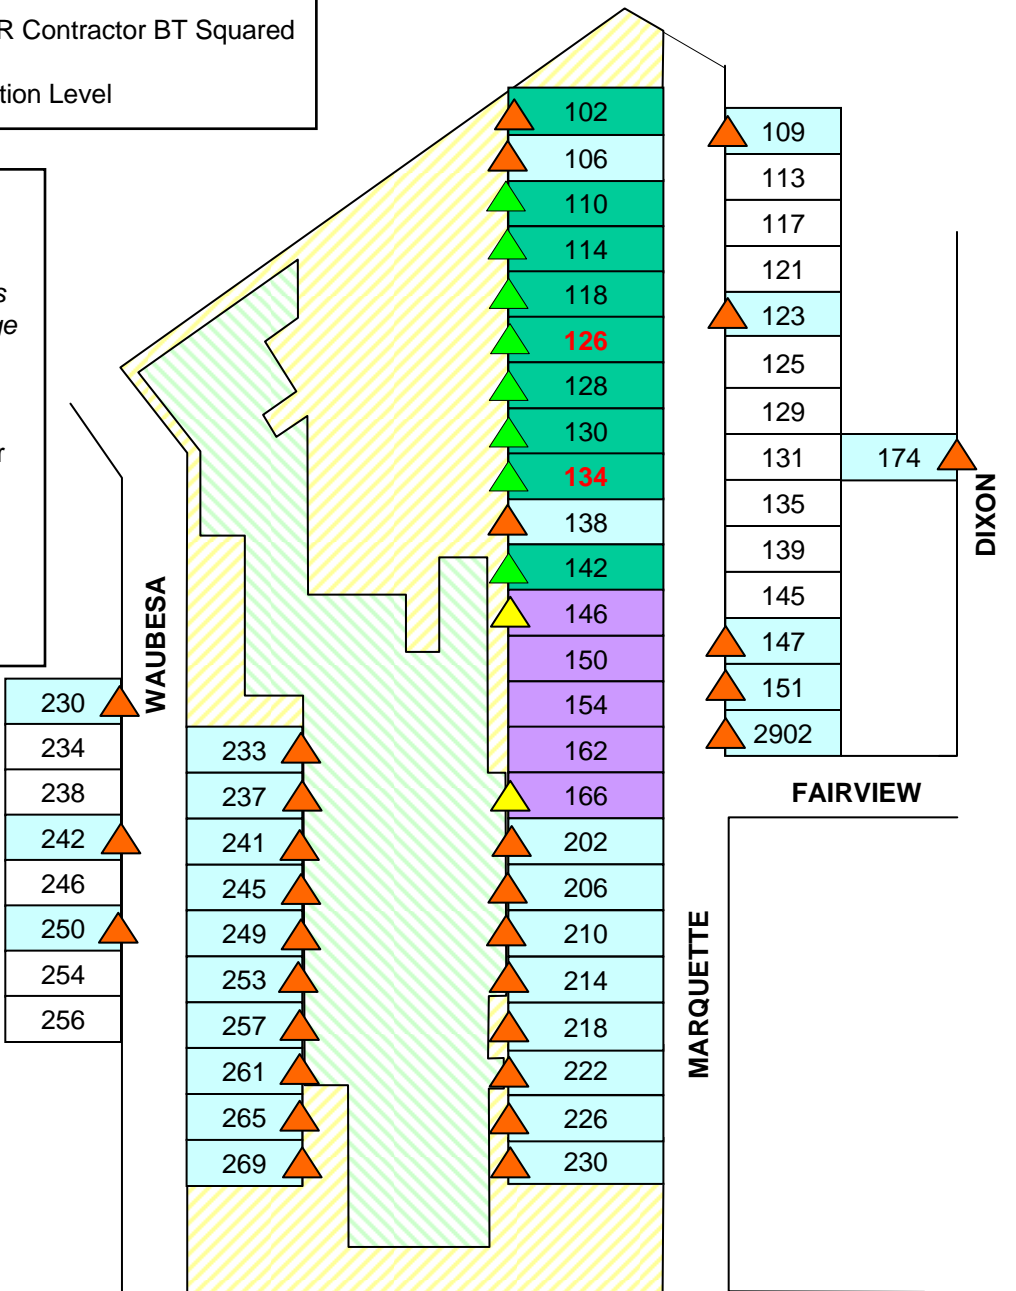

## Residential Vapor Intrusion Testing Near Madison Kipp Corporation

Results for Tetrachloroethylene (PCE) Only  
 Samples Collected by Arcadis – March 2012  
 All concentrations in *parts-per-billion by volume (ppbv)*

Address	Sub Slab Site #1	Sub Slab Site #2	Indoor Air Site #1	Indoor Air Site #2
102 S. Marquette	n/a <sup>1</sup>	n/a	ND	ND
106 S. Marquette				
110 S. Marquette	1.5	0.28	0.060	0.060
<i>DHS Split</i>	-	0.485	-	-
114 S. Marquette	1.7	.50	.084	.092
118 S. Marquette	1.4	0.32	0.14	0.061
126 S. Marquette	5.8	0.79	0.046	0.045
<i>DHS Split</i>	<b>8.43</b>	1.17	-	-
128 S. Marquette	0.18	ND	ND	ND
130 S. Marquette	2.4	0.46	0.036	ND
<i>DHS Split</i>	2.87	0.732	-	-
134 S. Marquette	<b>6.2</b>	1.6	0.14	0.035
138 S. Marquette				
142 S. Marquette	1.4	0.52	ND	ND
<i>DHS Split</i>	0.742	-	-	-

**Note:**

- ND – Not Detected
- DHS Split – A sample taken at the exact same time and location by the Wisconsin Department of Health Services
- **Bold** – Results Above Action Level
- n/a<sup>1</sup> – sub-slab samples at 102 S. Marquette lost at lab, must be resampled
- Empty cell indicates data is not yet available