




**WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
TIMBER SALE
TRACT 9-18 JAG LAKE II
T42N R6E SECTION(S) 26, 27, 34, 35
HARVEST ACRES - 173**

This sale is located within Management Area 3: Vilas Sandy Plains North Forest Production Area & Special Aquatic Native Community Management Area.

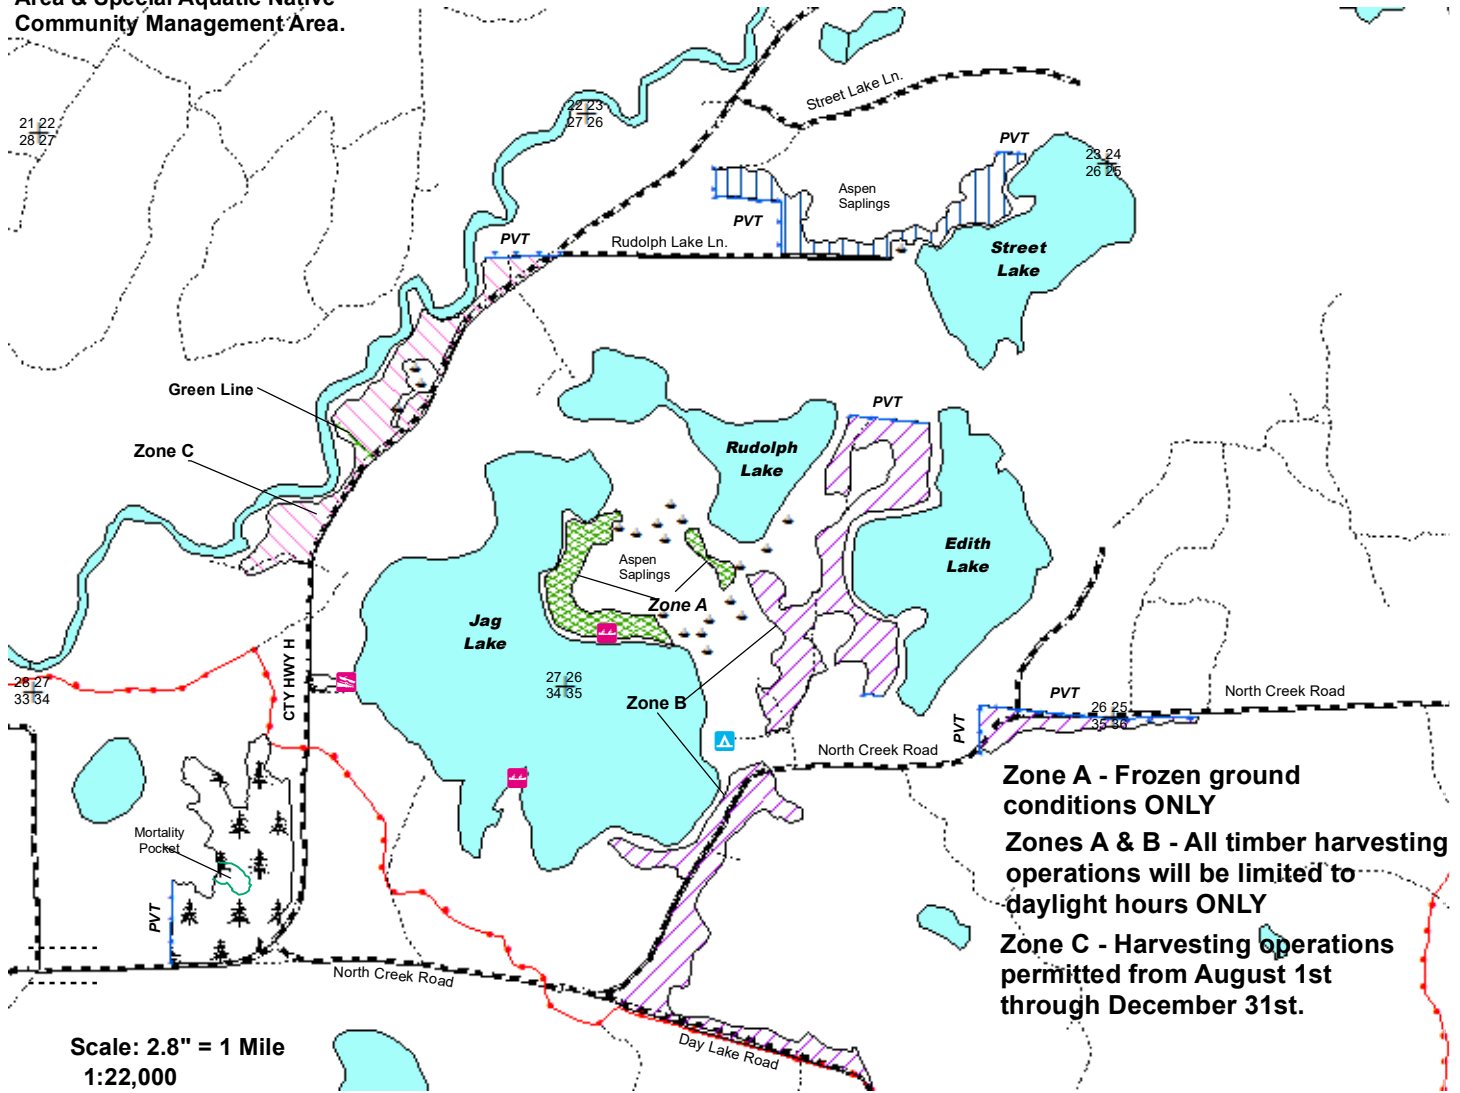

Zone A - Frozen ground conditions ONLY
Zones A & B - All timber harvesting operations will be limited to daylight hours ONLY
Zone C - Harvesting operations permitted from August 1st through December 31st.

Scale: 2.8" = 1 Mile
1:22,000

- Legend**
- Canoe Campsite
 - Jag Lake Boat Landing
 - Jag Lake Group Campground
 - Section Corner
 - Survey Marker
 - Keg/Swamp
 - Woods Roads
 - Blue Line
 - Red Line
 - Green Line
 - Lakes & Open Water
 - Snowmobile Trails
 - Highways and Townroads

Oak Wilt Restrictions: No harvesting or skidding in all areas from April 15 to July 15 due to the risk of oak wilt.

- Oak/Birch Area (17 Acres): Cut all aspen, birch, maple, and orange marked trees. Cut all merchantable balsam fir and ironwood.
- Pine Thinning Area (30 Acres): Cut all aspen, birch, maple, oak and orange marked trees. Cut all merchantable balsam fir. Protect ephemeral ponds with 15 foot buffer from their edge.
- Pine Plantation Thinning (36 Acres): Cut all jack pine and orange marked trees ONLY
- Oak/Pine Shelterwood Area (12 Acres): Cut all aspen, white birch, maple, ironwood, merchantable balsam fir and orange marked trees. Cut all 1-5 inch stems except for oak and pine.
- Overstory Removal (78 Acres): Cut all aspen, birch, maple, oak, ironwood, merchantable balsam fir and orange marked trees.

Note: Do NOT cut trees marked with green paint



Map produced by Paul Stearns, 05/29/18

This map is not a survey of the actual boundary of any property this maps depicts

NH-ALSF TRACT NO. 9-18

Jag Lake II

Vilas County

Town 42 North, Range 6 East

Section 26 GL01, GL04, GL07, GL09, GL10, NENW

Section 27 GL01, GL03, SWNE, NESW, SESW

Section 34 NENW, SENW

Section 35 GL01, GL03, GL04, NWSW, NESW, NWSE

Section 36 NWNW

No bid bond will be required.

15% of the total sale bid value or \$1000.00, whichever is greater, will be required for performance bond.

The cutting area is approximately 173 acres.

The contract period is 3 years.

All trees that will yield one or more 100-inch sticks to the minimum 4" top diameter will be cut and utilized.

<u>SPECIES</u>	<u>ESTIMATED VOLUME (TONS)</u> <u>MINIMUM TOP DIAMETER</u>	<u>Advertised Price</u> <u>Per Unit</u>
Red Pine ¹	4" 1300	\$ 23.00
Balsam Fir ²	80	\$ 5.80
Aspen	320	\$ 17.00
Oak ³	850	\$ 12.80
Mixed Hardwoods ⁴	625	\$ 16.20
 <u>ESTIMATED VOLUME (MBF)</u>		
Red Oak	121MBF	\$ 404.00
Total Minimum Bid Value		\$ 105,693.00

PR¹ --Approximately 56% (728 tons) Red Pine, 41% (533 tons) PW Pine, and 3% (39 tons) Jack Pine. Includes approximately 52MBF Red Pine sawlogs and 53MBF of White Pine sawlogs. (Wt. conv. 2.182 tons/cord)

F²-- Approximately 89% (71 tons) Balsam Fir, and 11% (9 tons) White Spruce. (Wt. conv. 2.110 tons/cord)

O³-- Approximately 93% (787 tons) Red Oak and 7% (63 tons) Scrub/Pin Oak.

MX⁴ --Approximately 63% (394 tons) Soft Maple, 21% (131 tons) Hard Maple, 16% (100 tons) White birch, and less than 1% Ironwood. Includes approximately 6 MBF of White Birch sawlogs, 3MBF Soft Maple sawlogs, and 1MBF of Hard Maple sawlogs. (Wt. conv. 2.348 tons/cord)

Note sale volume equates to 22.6 tons/acre or approximately 10 cords per acre. Volumes above reflect utilization to 4" top.

Special Conditions:

1. Seasonal Restrictions: Harvesting operations will be limited to a period from July 15 to April 15 due to Oak Wilt considerations. Zone A - Frozen ground conditions only. Zones A & B - All harvesting operations will be limited to daylight hours ONLY.
Zone C – Harvesting Operations permitted from August 1 to December 31.
2. Cutting must be concurrent for all species to be harvested.
3. Excessive damage to understory seedlings and saplings within overstory removal areas will not be tolerated.
4. All pine products cut between May 1 and September 1 must be removed from the sale area within three weeks from time of cutting. Pine products cut during the remainder of the year must be removed prior to May 1 of each year.
5. Equipment Restrictions: Skidding of forest product materials will be restricted to short wood skidders only.
6. Snowmobile trails must be kept free of debris and left in good condition for vehicle traffic at all times.
7. Decking of wood will not be permitted along Rudolph and North Creek roads.
8. No tops or slash allowed across any blue line, red line or within any wetland. All slash must be lopped and or scattered to within two feet of the ground and pulled back into the sale area at least 10 feet away from private lands and public roads.
9. Felling and skidding damage to residual trees must be avoided.