




**WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
TIMBER SALE
TRACT 981-18 TRAILS END TAMARACK II
T36N R6E SECTION 1
T36N R7E SECTION 6
HARVEST ACRES - 80**

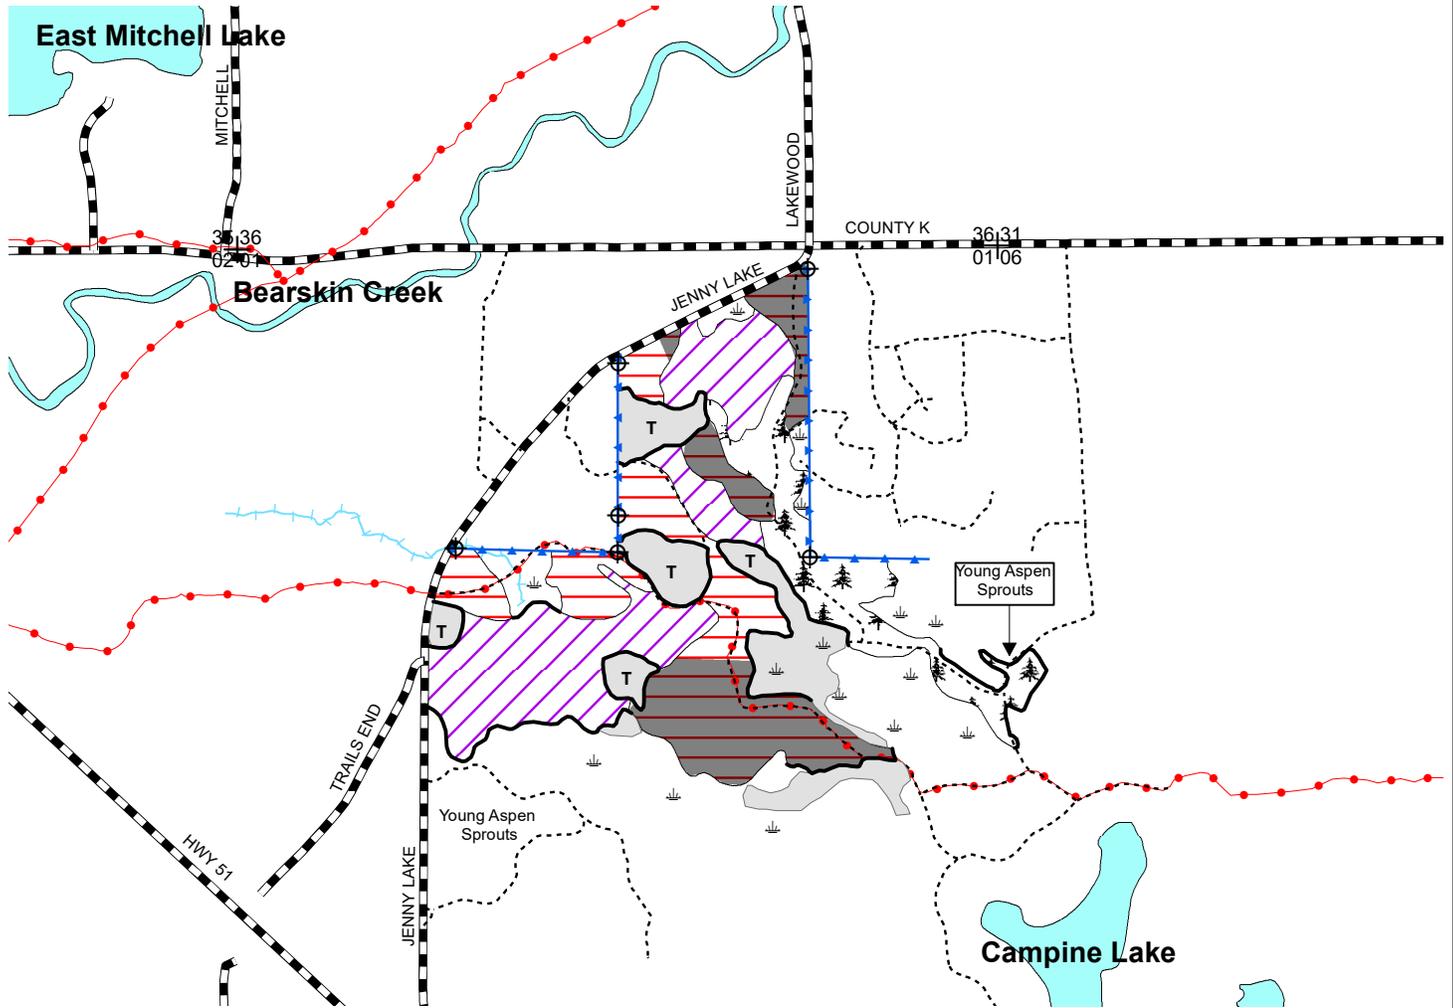

Legend

- Section Corner
- Survey Marker
- Keg/Swamp
- Blue Line
- Red Line
- Woods Trails
- Snowmobile Trails
- Highways and Town Roads
- Rivers and Streams
- Tamarack Poletimber
- Open Water
- GTR (28 acres)

- Aspen Area (48 acres): Cut all aspen, balsam fir, tamarack and black spruce greater than 1 inch. If harvesting whole tree, 1 in 10 tops above the standard 4 inch top must be left on site and evenly distributed throughout the harvest area. Approximately 25% of the aspen trees in this area are wind-tipped.
- Pine Plantation Area (19 acres): Cut out every row which has 3 diagonal orange slashes painted on trees within the row. Cut all other orange marked red pine, as well as all tamarack and black spruce greater than 1 inch. No pole or whole tree skidding allowed.
- Tamarack Area (43 acres): Winter harvest only. Cut all tamarack, black spruce and balsam fir greater than 1 inch. All tops and limbs must lie less than 1 foot high. Uncut islands, consisting of 10 to 15 trees greater than 5 inches, must be left every 200 feet, evenly distributed throughout the stand.
- Harvested Area (30 acres) Aspen Sprouts: These areas were previously harvested and do not need to be entered.

Scale: 4" = 1 Mile
 1:15,840



Map produced by
Ricky Keller, 9/18

This map is not a survey of the actual boundary of any property this map depicts.

WOODBORO LAKES TRACT NO. 981-18

Compartment 1 Stand #2, 5, 43

Trails End Tamarack II Sale

Oneida County

Town 36 North Range 6 East

Section 1 – NWNE, S½NE, N½SE, SENW, NESW

Town 36 North Range 7 East

Section 6 – SWNW

The cutting area is approximately 80 acres.

The contract period is 2 years.

ESTIMATED VOLUME (TONS)

MINIMUM TOP DIAMETER

<u>SPECIES</u>	<u>4"</u>	<u>ADVERTIZED PRICE PER UNIT 4"</u>	<u>WHOLE TREE (WT)</u>	<u>ADVERTIZED PRICE PER UNIT (WT)</u>
Red Pine	600	\$15.00/T		
Tamarack	1470	\$4.00/T		
Balsam Fir	160	\$8.40/T		
Black Spruce	50	\$9.50/T		
Aspen	570	\$12.12/T	OR 720T	\$9.60/T

Total Minimum Bid Value \$23,611.00

Special Conditions

1. Cutting must be concurrent for all species to be harvested.
2. If harvesting whole tree (aspen area only), 1 in 10 tops above the standard 4" top must be left on site and evenly distributed throughout the sale area.
3. No equipment may be operated within 15 feet of any wetland unless the ground is firm or frozen. All slash to be lopped and scattered to lie within two feet of the ground. No tops or slash allowed across any blue line, red line, or in any wetland.
4. In the Tamarack Area, cut tops must be used as a travel mat for equipment to prevent rutting as well as to expose a suitable seedbed.
5. Landings and any new road locations must be approved prior to construction.
6. If logging is done during the winter and the snowmobile trail is used, it must be kept open, level, free of debris, and snow covered. In addition, signs will need to be placed along the snowmobile trail. If logging is done during the remainder of the year the trail must be left in pre-sale condition prior to the snowmobile season.
7. All dead standing trees must be left standing unless they pose a safety hazard to the harvesting operation.
8. Decking of wood will not be permitted along the snowmobile trail during the winter.