


**WISCONSIN  
DEPARTMENT OF NATURAL RESOURCES  
TIMBER SALE  
TRACT 17-19 SWEENEY CREEK  
T39N R7E SECTIONS 14, 15 & 22  
HARVEST ACRES - 93**

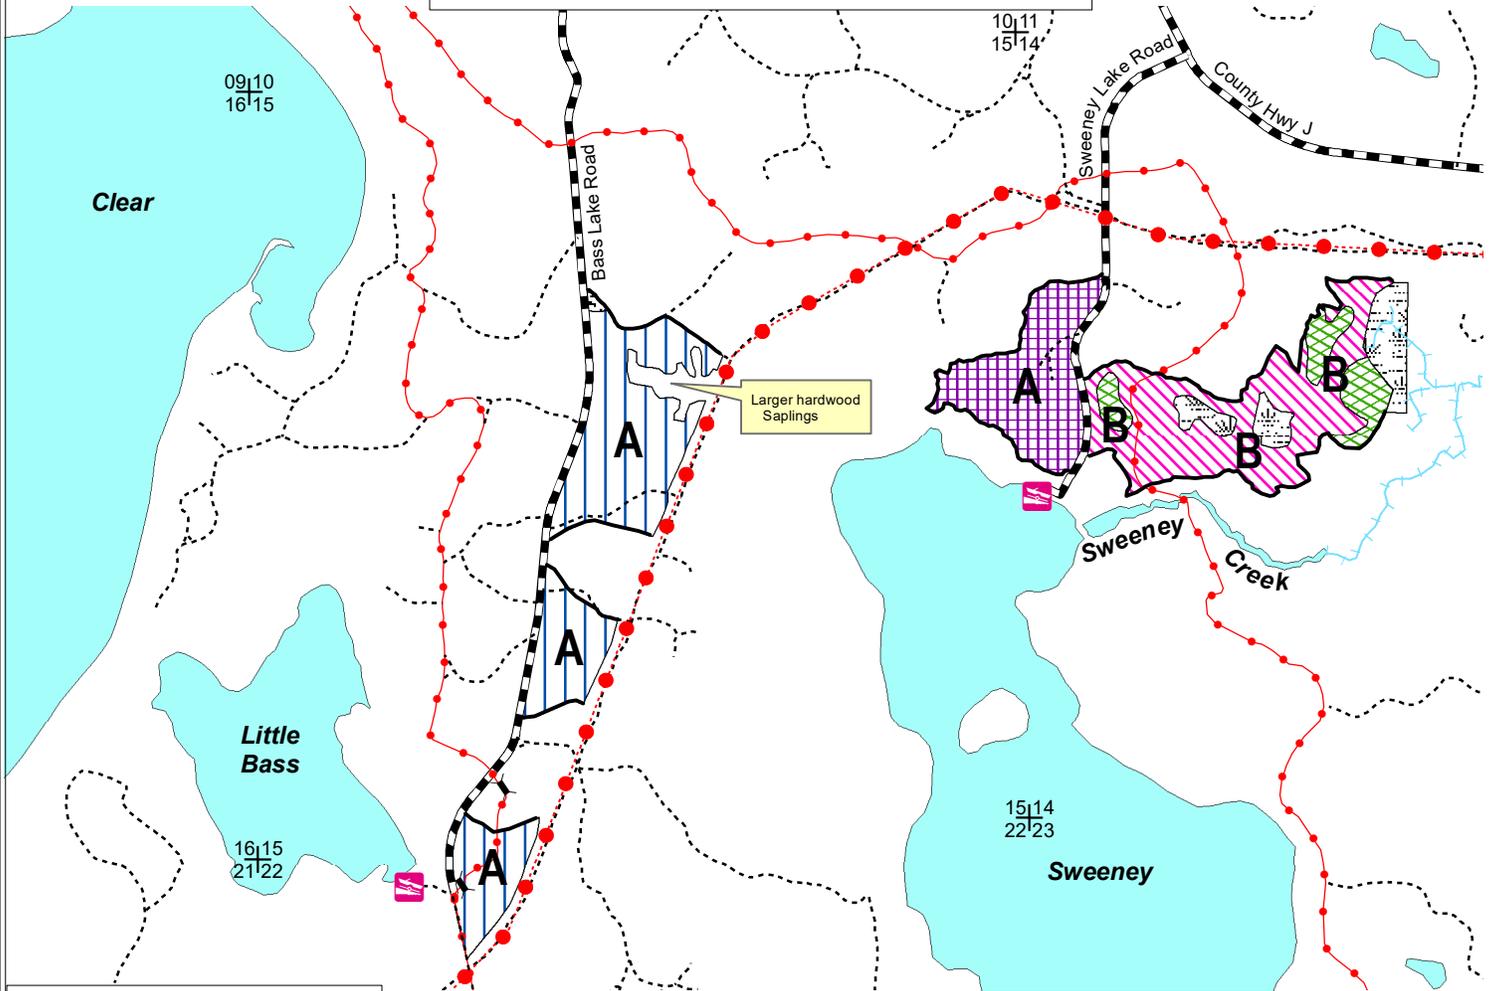


**Legend**

- Boat Landing
- Section Corner
- Gates
- Powerline
- Red Line
- Woods Roads
- Snowmobile Trails
- Highways and Town Roads
- Grass Openings
- Rivers and Streams
- Lowland Area
- Lakes

- Oak Shelterwood Area (41 Acres): Cut all trees except those marked with green paint. Cut only those pine marked with orange paint.
- Mixed Harvest Area (27 Acres): Cut all trees except: oak, cedar, yellow birch, pine, hemlock and those marked with green paint. Cut only those hemlock, pine and oak marked with orange paint.
- Purple Marked Area (19 Acres): Cut all trees except those marked with purple paint. Do not cut any red or white pine.
- Swamp Conifer Area (6 Acres); Cut all trees except those marked with green paint. Cut only those pine marked with orange paint.

**SEASONAL RESTRICTION: In ZONE A, all harvesting activity is only allowed July 15 - April 15. In ZONE B, all harvesting activity is only allowed during frozen ground conditions.**

N  
Scale: 4" = 1 Mile  
1:15,840



All stands are within Mgmt Area 5:  
Big Arbor Vitae Loamy Hills- Forest Production

NH-ALSF TRACT 17-19

Sweeney Creek

Oneida County

Town 39 North, Range 7 East

Section 14 – GL 2; NESW; S1/2NW1/4

Section 15 – GL 2 & 4; SENE; NESW; SWNE; SENW

Section 22 – NENW

No bid bond required.

15% of the total sale bid value will be required as performance bond.

The cutting area is approximately 93 acres.

The contract period is 3 years.

All trees that will yield one or more 100-inch sticks to the minimum top diameter chosen by the bidder will be cut and utilized.

---

ESTIMATED VOLUME (TONS)

MINIMUM TOP DIAMETER

<u>SPECIES</u>	<u>4"</u>	<u>Advertised Price Per Unit</u>
Red Pine <sup>1</sup>	160	\$ 21.70
Balsam Fir <sup>2</sup>	440	\$ 7.00
Aspen	210	\$ 15.40
Red Oak <sup>3</sup>	1560	\$ 23.10
Mx. Hardwood <sup>4</sup>	1640	\$ 13.30

**Total Minimum Bid Value \$ 67,634.00**

<sup>1</sup>Volume includes 57% red pine and 43% white pine. It also includes 10 MBF of red pine and 8 MBF of white pine potential logs (Wt. Ave 2.186).

<sup>2</sup>Volume includes 35% balsam fir, 34% tamarack, 30% spruce and 1% hemlock (Wt. Ave. 2.158 tons/cord).

<sup>3</sup>Volume includes 145 MBF of potential oak logs.

<sup>4</sup>Volume includes 34% white birch, 34% sugar maple, 32% red maple and less than 1% yellow birch and ironwood. Volume also includes 6 MBF white birch logs, 9 MBF of sugar maple logs and 1 MBF of red maple logs. (Wt. Ave. 2.411 tons/cord). The total sale volume equates to approximately 43.11 tons/acre or 16.40 cords/acre.

Special Conditions:

1. Biomass harvesting is not allowed. Do not cut, knock down, or utilize any dead standing snags. Cutting must be concurrent for all species to be harvested. Special care must be taken in Purple Marked Area as to not damage residual seedlings. Short wood forwarding only in this area.
2. No tops or slash allowed across any red line, powerline or within any grass opening. Slash within 50 feet of the town roads and snowmobile trail must be lopped and scattered within 2 feet of the ground and pulled back into the sale area at least 10 feet from the edge of the town road and the snowmobile trail. Biomass harvesting is not allowed.
3. Snowmobile trail must be kept free of debris, snow covered in winter, and left in good condition for vehicle traffic always. All trails must be repaired to pre-harvest conditions before the start of each snow season. All landings and any new woods roads must be approved prior to sale start up. All existing woods roads and the snowmobile trail must be restored to pre-harvest condition upon sale completion.
4. In ZONE A, all harvesting activity is only allowed July 15 – April 15 due to oak wilt restrictions. In ZONE B, all harvesting activity is only allowed during frozen ground conditions.
5. If the contract is to be worked on during multiple time periods a mid-contract “pull-off” inspection meeting will be required. One-week notice shall be given by the contractor prior to moving equipment off-site. During the “pull-off” inspection, provisions needing attention will be documented. The contractor at that time can decide to remedy them before pulling equipment off or rectify them when moving back onto the site. If the latter is chosen, documented items shall be addressed before harvesting can continue.