




**WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
TIMBER SALE
TRACT 15-20 MIGHTY FIND PINE
T39N R8E SECTION 12
T39N R9E SECTION 7, 8
HARVEST ACRES - 153**

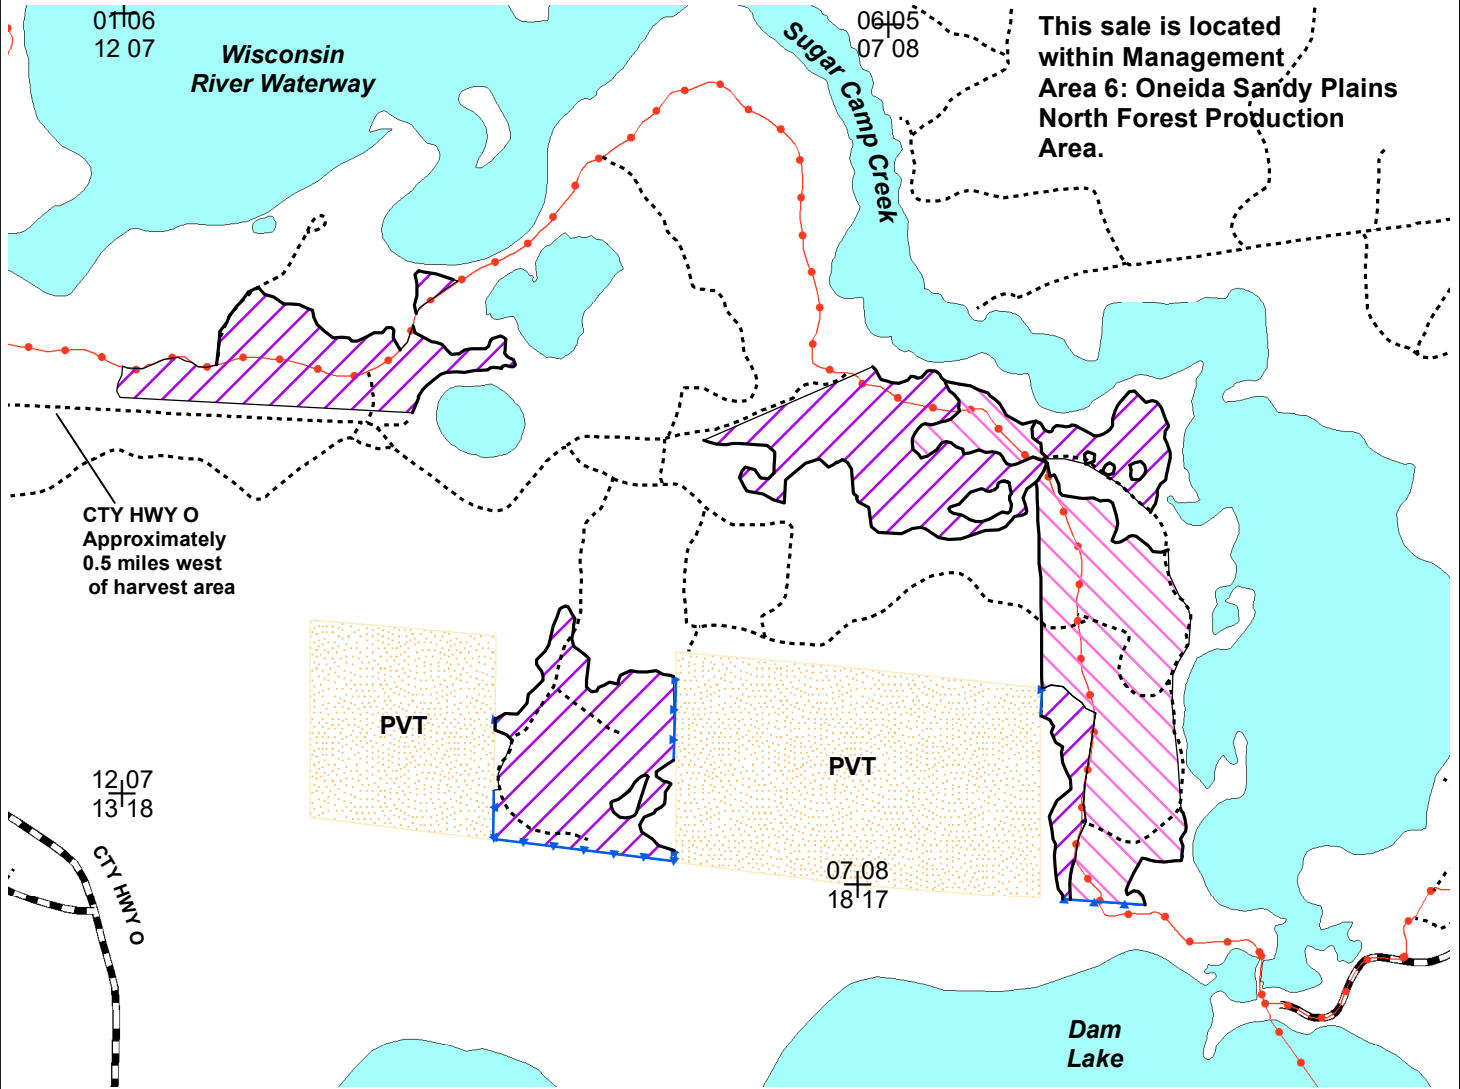

**Scale: 4" = 1 Mile
1:15,840**

Legend

- Survey Marker
- Section Corner
- Red Line
- Blue Line
- Snowmobile Trails
- Woods Roads & Trails
- Highways and Townroads
- Private Lands (PVT)
- Lakes & Open Water

Oak Wilt Restrictions: No harvesting or skidding in all areas from April 15 to July 15 due to the risk of oak wilt.

Pine Thinning Areas (101 Acres): Cut all merchantable aspen, maple, white birch, balsam fir, jack pine and orange marked trees.

Oak Regeneration Area (52 Acres): Cut all merchantable trees EXCEPT those marked with green paint. Cut all 1-5" trees, EXCEPT pine and oak. Take extra care to NOT DAMAGE PINE & OAK understory.

Note: Do NOT cut trees marked with green paint



Map produced by
Paul Stearns & Jake Bonack, 06/16/20

This map is not a survey
of the actual boundary
of any property this maps depicts

Northern Highland American Legion State Forest TRACT NO. 15-20
Mighty Find Pine

Oneida County

Town 39 North, Range 9 East (Sugar Camp Township)

Section 7 SWNW, SENW, SWNE, NWSE, SWSE, SENE, NESE

Section 8 SWNW, SENW, NWSW, NESW, SESW

Town 39 North, Range 8 East (Newbold Township)

Section 12 SENE

No bid bond is required.

15% of the total sale bid value will be required for performance bond.

The cutting area is approximately 153 acres.

The contract period is 3 years.

All trees that will yield one or more 100-inch sticks to a 4" top diameter will be cut and utilized.

ESTIMATED VOLUME (TONS)
MINIMUM TOP DIAMETER

<u>SPECIES</u>	<u>4"</u>	<u>Whole Tree</u>
White Pine ¹	1500	
Aspen	525	
Oak ²	2700	
Mixed Hardwood ³	650	

Total Minimum Bid Value: \$75,967.50

PW¹=50% PW, 40% PR, 6% F, 4% PJ/ Species Volumes includes approx. 75MBF PW and 65MBF PR (Conversion Factor= 2.160)

OR²= Volume includes approx. 130MBF OR

MX³= 89%MR, 11% BW/ Species Volume Includes approx. 8MBF MR and 2 MBF BW (Conversion Factor= 2.288)

Special Conditions:

1. All pine products cut between May 1 and September 1 must be removed from the sale area within three weeks from time of cutting. Pine products cut during the remainder of the year must be removed prior to May 1 of each year.
2. Oak Wilt Restriction-No harvesting or skidding April 15- July 15. Trucking/ roadwork may be allowed but needs to be approved by administrator (or designee).
3. Cutting must be concurrent for all species.
4. Do not cut, knock down or utilize any dead trees.
5. Slash within 50 feet of all roads and trails must be lopped and/or scattered to lie within two feet of the ground and be pulled back 10' behind the tree line concurrently with cutting.
6. Whole tree utilization or biomass harvesting is not allowed.
7. Follow WI BMP's for water quality at all times. No equipment is allowed within 15 feet of the flowage. Avoid wetlands as much as possible and only operate within them during very dry times with timber matting or under frozen ground conditions.
8. The Snowmobile Trails must be kept free of debris, snow covered in winter, and left in good condition for vehicle traffic at all times. The trail shall be signed indicating logging activity if any activity occurs during periods that the snowmobile trail is open.
9. Additional roads and landings must be approved by the timber sale administrator (or designee) in advance of use.