










**WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
TIMBER SALE
TRACT 20-20 POPPLE ANJA
T42N R8E SECTIONS 14, 23 & 24
HARVEST ACRES - 143**

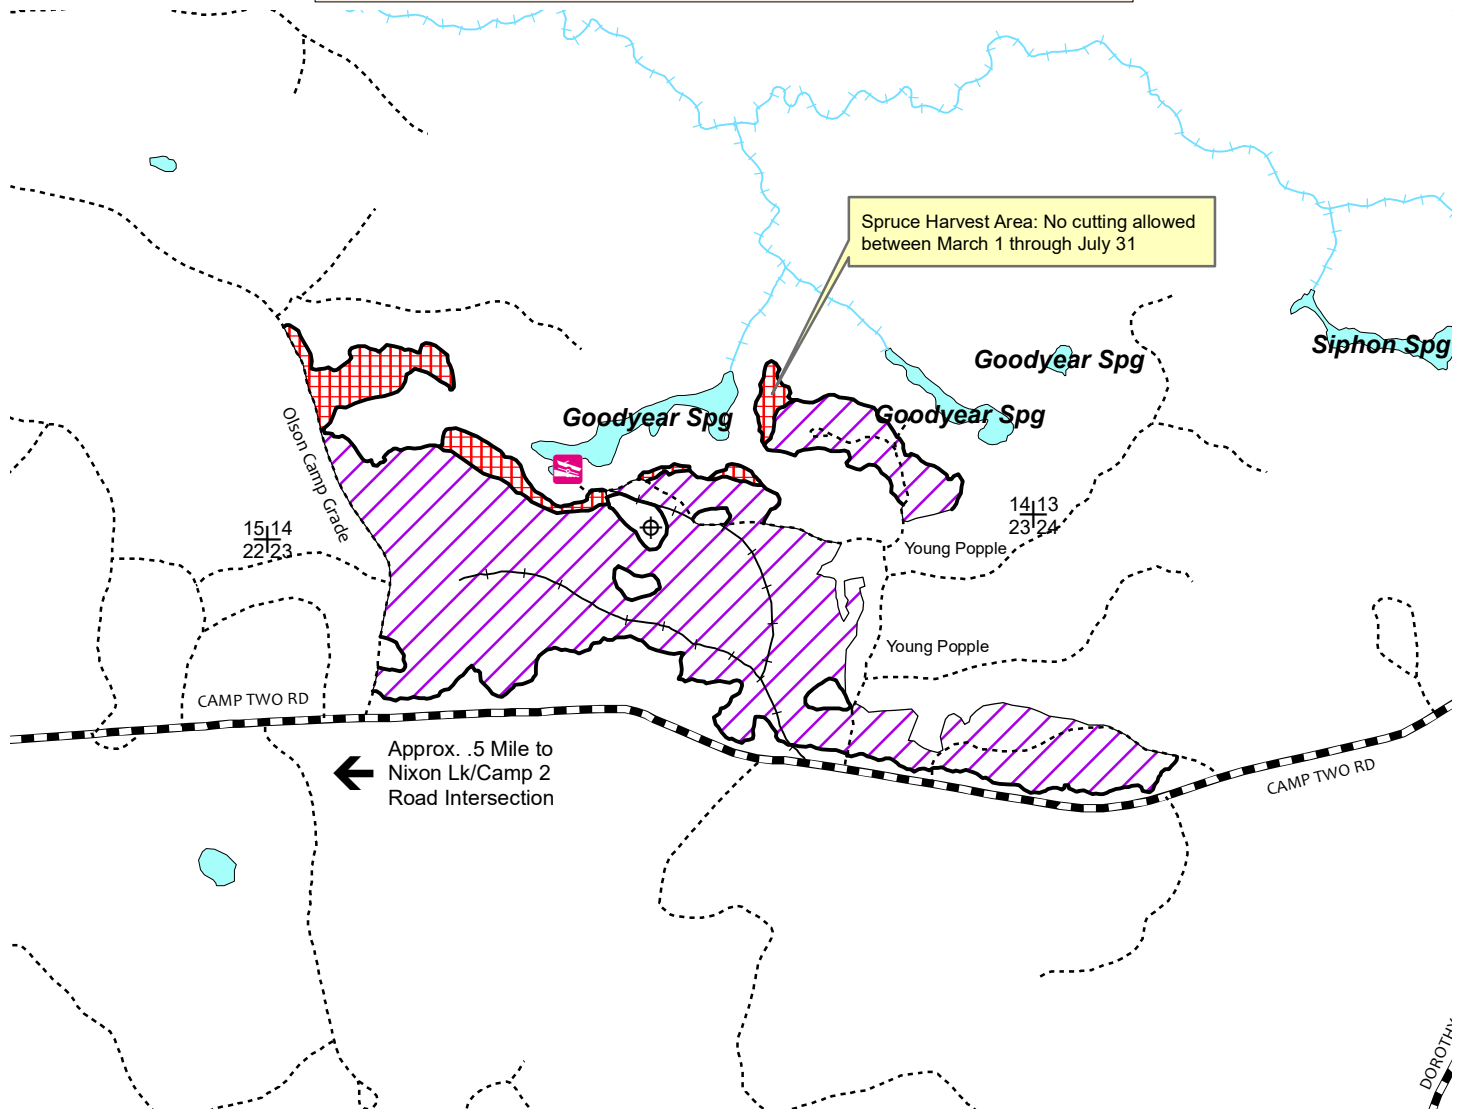

Legend

-  Section Corner
-  Survey Marker
-  Boat Landing
-  Red Line
-  Old Railroad Grade
-  Woods Roads
-  Highways and Town Roads
-  Rivers and Streams
-  Lakes



Aspen Harvest Area (130 Acres): Cut all merchantable aspen, red maple and white spruce. Cut all pine marked with orange paint. Do not cut green marked trees or any white birch. Cut 1-5 inch maple.



Spruce Harvest Area (13 Acres): Cut same as above, except cut all merchantable white birch.

All stands are within Mgmt. Area 3:
Vilas Sandy Plains North -
Forest Production

N
Scale: 4" = 1 Mile
1:15,840



Map produced by
Todd Anderson &
Paul Schultz, 6/20

This map is not a survey
of the actual boundary of
any property this map depicts.

NH-ALSF TRACT NO. 20-20

Popple Anja

Vilas County

Township 42 North, Range 8 East

Section 14 – NWSW, SWSW, SESW, SWSE and SESE (Town of Land O' Lakes)

Section 23 – NENE, NUNE, SWNE, SENE, NENW and NWNW (Town of Plum Lake)

Section 24 – SWNW (Town of Plum Lake)

15% of the total sale bid value will be required for the performance bond.

The cutting area is approximately 143 acres.

All trees that will yield one or more 100-inch sticks to the minimum top diameter chosen by the bidder will be cut and utilized.

Whole tree harvest IS NOT allowed on this timber sale.

ESTIMATED VOLUME (TONS)
MINIMUM TOP DIAMETER

<u>SPECIES</u>	<u>4"</u>
Red Pine	900
Jack Pine	225
Spruce	1250
Aspen	4275
Mixed Hardwood ¹	400

Total Minimum Bid Value \$ 84,105.00

¹ Mixed Hardwood – Approximately 155 tons (includes an estimated 10 MBF) White Birch and 245 tons Red Maple.

Weighted average = 2.322 tons/cord.

Sale contains approximately 49 tons/acre or 21 cords/acre.

Special Conditions

1. **SEASONAL RESTRICTION:** Area A – No cutting allowed between March 1 through July 31.
2. All standing dead snags must remain standing unless they pose a hazard to operator safety.
3. All landings and any new roads must be approved prior to sale start up. All roads must be cleared of debris and leveled upon sale completion.
4. Do not operate machinery within 15 feet of any ephemeral pond or wetland.
5. If the contract is to be worked on during multiple time periods a mid-contract "pull-off" inspection meeting will be required. One week notice shall be given by the contractor prior to moving equipment off-site. During the "pull-off" inspection provisions needing attention will be documented. The contractor at this time can decide to remedy them before pulling off or rectify them when moving back onto the timber sale. If the latter is chosen documented items shall be addressed before harvesting can continue.
6. All pine products cut between May 1 and September 1 each year must be removed from the sale area within three weeks from time of cutting. Pine products cut during the remainder of the year must be removed prior to May 1 of each year.
7. Slash adjacent to Olsen Camp Grade must be lopped and scattered within two feet of the ground and pulled back into the sale area at least ten feet from the grade.