


**WISCONSIN  
DEPARTMENT OF NATURAL RESOURCES  
TIMBER SALE  
TRACT 21-20 HARDLY JACK  
T42N R7E SECTIONS 14 & 15  
HARVEST ACRES - 22**

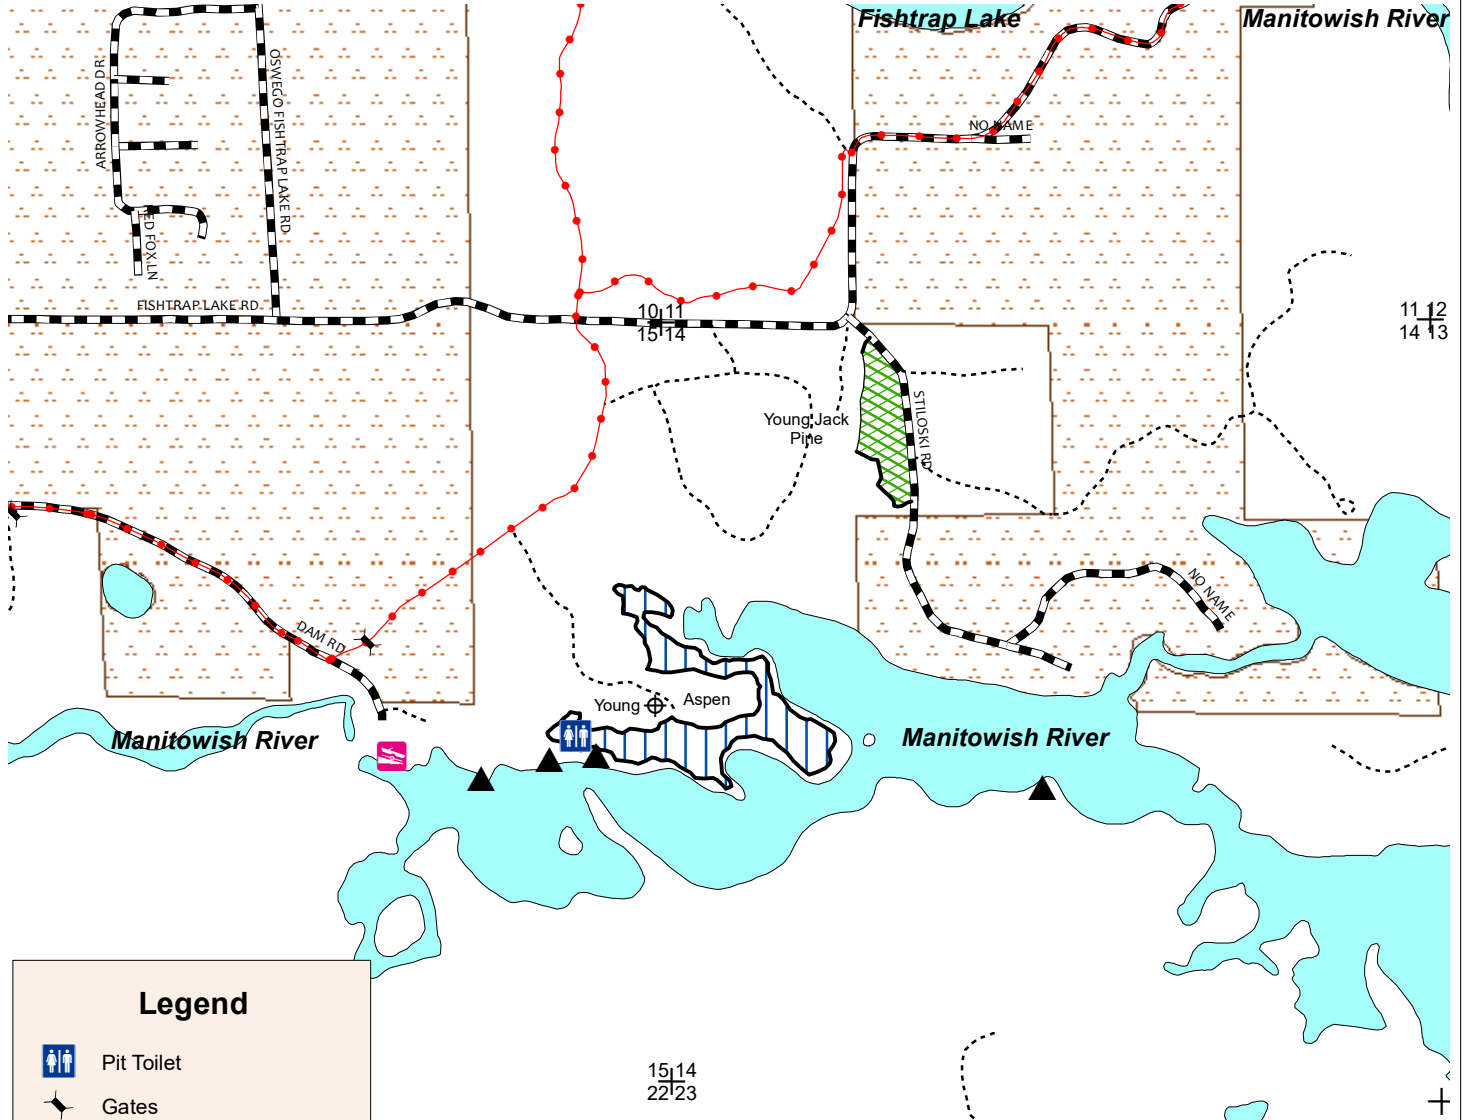

**Legend**

- Pit Toilet
- Gates
- Section Corner
- Survey Marker
- Canoe Campsite
- Boat Landing
- Red Line
- Woods Roads
- Snowmobile Trails
- Highways and Town Roads
- Private Lands
- Lakes

- Pine Harvest Area (7 Acres): Cut all pine marked with orange paint.
- Hardwood Harvest Area (15 Acres): Cut all merchantable aspen, white birch, red maple and jack pine. Cut all orange marked pine and oak.

All stands are within Mgmt. Area 3:  
Vilas Sandy Plains North -  
Forest Production

**Seasonal Restriction: No road work or cutting/  
skidding from April 15 to July 15 due to the risk  
of oak wilt.**

N  
Scale: 4" = 1 Mile  
1:15,840



Map produced by  
Todd Anderson &  
Paul Schultz, 6/20

This map is not a survey  
of the actual boundary of  
any property this map depicts.

NH-ALSF TRACT NO. 21-20  
Hardly Jack

Vilas County

Township 42 North, Range 7 East

Section 14 – NENW, SWNW, NWSW

Section 15 – SENE, NESE

15% of the total sale bid value will be required for the performance bond.

The cutting area is approximately 22 acres.

All trees that will yield one or more 100-inch sticks to the minimum 4” top diameter will be cut and utilized.

Whole tree harvest IS NOT allowed on this timber sale.

---

ESTIMATED VOLUME (TONS)  
MINIMUM TOP DIAMETER

<u>SPECIES</u>	<u>4”</u>
Red Pine <sup>1</sup>	550
Jack Pine	120
Mixed Hardwood <sup>2</sup>	270

**Total Minimum Bid Value     \$ 13,265.00**

---

1\ Red Pine – Approximately 473 tons (includes an estimated 71 MBF) Red Pine, 36 tons (includes an est. 4 MBF) White Pine and 41 tons Balsam Fir. Weighted average = 2.230 tons/cord.

2\ Mixed Hardwood – Approximately 222 tons (includes an estimated 16 MBF) White Birch, 37 tons Red Maple and 11 tons Scrub Oak. Weighted average = 2.394 tons/cord.

Sale contains approximately 43 tons/acre or 19 cords/acre.

Special Conditions

1. **SEASONAL RESTRICTION:** No road work or cutting/skidding from April 15 to July 15 due to the risk of oak wilt.
2. All landings and any new roads must be approved prior to sale start up. All roads and the snowmobile trail must be cleared of debris and leveled upon sale completion.
3. Slash adjacent to the Town Road must be lopped and scattered within 2 feet of the ground and pulled back into the sale area at least 10 feet from the road.
4. Do not operate machinery within 15 feet of any ephemeral pond or wetland.
5. All pine products cut between May 1 and September 1 each year must be removed from the sale area within three weeks from time of cutting. Pine products cut during the remainder of the year must be removed prior to May 1 of each year.
6. All standing snags must remain standing unless they pose a hazard to operator safety.
7. If the contract is to be worked on during multiple time periods a mid-contract “pull-off” inspection meeting will be required. One week notice shall be given by the contractor prior to moving equipment off-site. During the “pull-off” inspection provisions needing attention will be documented. The contractor at this time can decide to remedy them before pulling off or rectify them when moving back onto the timber sale. If the latter is chosen documented items shall be addressed before harvesting can continue.