


**WISCONSIN  
DEPARTMENT OF NATURAL RESOURCES  
TIMBER SALE  
TRACT 09-20 MYSTERY  
T41N R7E SECTION 1, 12  
T41N R8E SECTION 6  
T42N R7E SECTION 36  
HARVEST ACRES - 231**

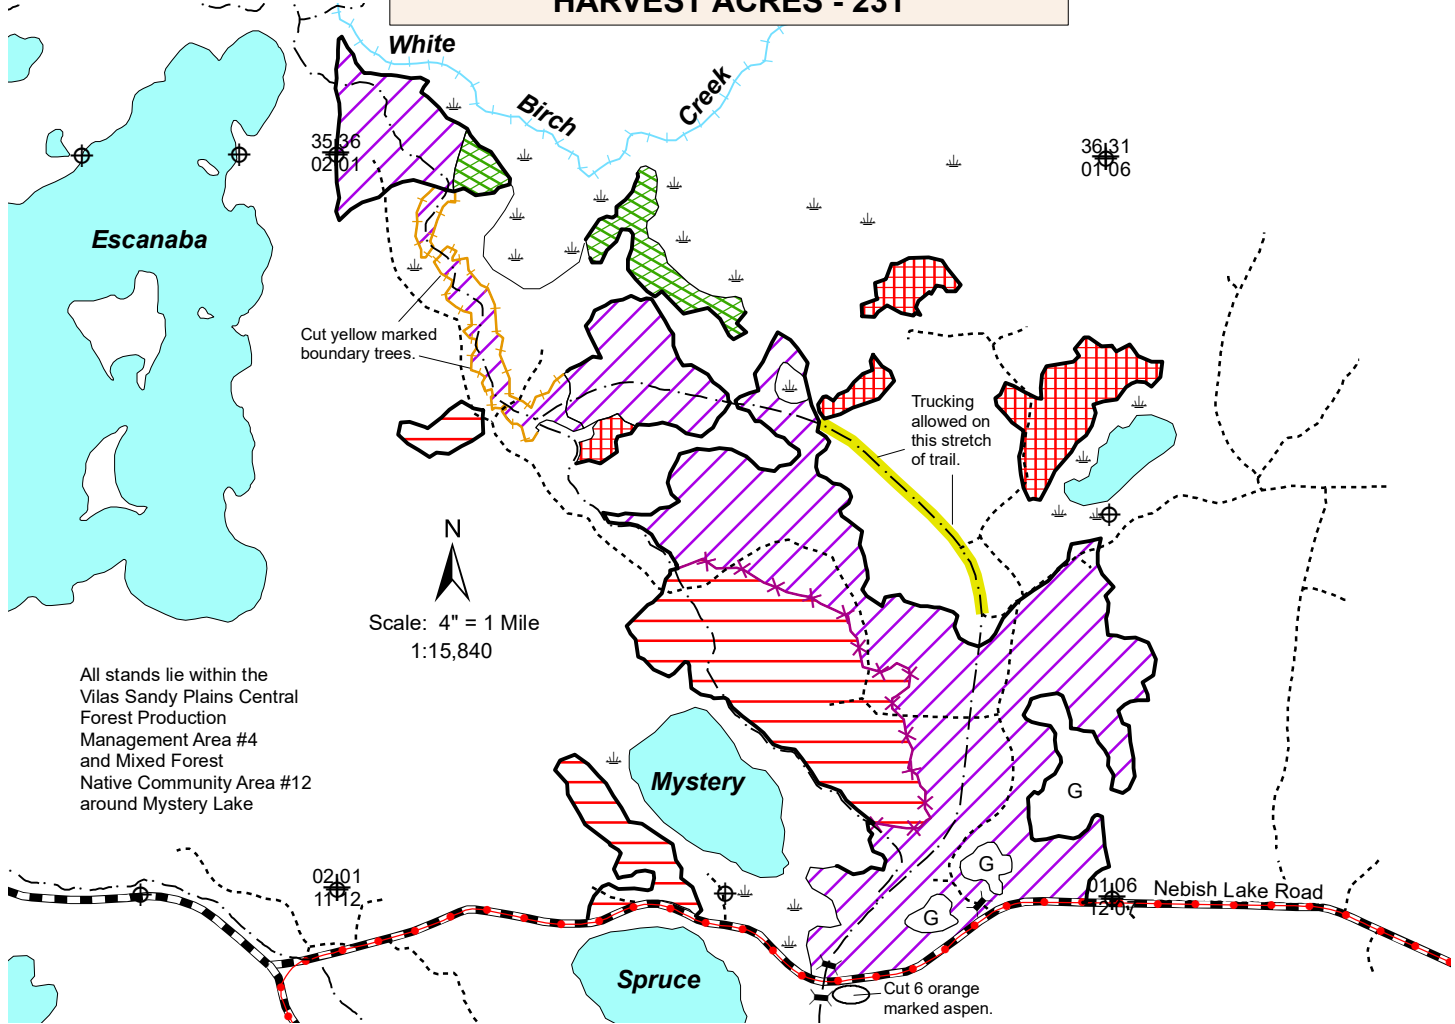

All stands lie within the Vilas Sandy Plains Central Forest Production Management Area #4 and Mixed Forest Native Community Area #12 around Mystery Lake

N  
Scale: 4" = 1 Mile  
1:15,840

Legend	
G	Grass Opening
⊥	Keg/Swamp
✦	Gates
⊕	Survey Marker
+	Section Corner
---	Escanaba Trail
—	Red Line
—+—	Yellow Line
—x—	Purple Line
—•—	Snowmobile Trails
---	Woods Roads
==	Highways and Town Roads
---	Stream
---	Lakes

- White Birch/Red Maple (148 Acres): Cut all merchantable aspen, balsam fir, ironwood, maple, spruce and white birch. Cut only orange marked oak and pine. Do not cut 1"-5" trees. Minimize damage to oak and pine regeneration.
- Oak/Hardwood Thinning (54 Acres): Cut all aspen, balsam fir, ironwood, white birch, and orange marked trees.
- Pine Thinning (19 Acres): Cut all aspen, balsam fir, white birch, and orange marked trees.
- Pine Seed tree (10 Acres): Cut all trees not marked green.

**Note: Do NOT cut trees marked with green paint. No harvesting, skidding or road work April 15 - July 15 due to the risk of Oak Wilt (with exception of pine thinning stands).**



Map produced by Chase Christopherson, 03/20

This map is not a survey of the actual boundary of any property this map depicts.

NH-ALSF TRACT NO. 09-20

Mystery

Vilas County

Town 41 North, Range 7 East

Section 1 – N ½, NESW, SESW, SE ¼

Section 12 –NENE, NWNE, NENW

Town 41 North, Range 8 East

Section 6 – SWNW, NWSW, SWSW

Town 42 North, Range 7 East

Section 36 – SWSW

15% of the total sale bid value will be required for performance bond.

The cutting area is approximately 231 acres.

The contract period is 3 years.

All trees that will yield one or more 100-inch sticks to the minimum top diameter will be cut and utilized.

Whole Tree harvest is not allowed.

---

ESTIMATED VOLUME (TONS)

<u>SPECIES</u>	<u>MINIMUM TOP DIAMETER</u>	<u>Advertised Price</u>
	<u>4"</u>	<u>Per Unit</u>
White Pine <sup>1</sup>	1750	\$ 12.60
Jack Pine	140	\$ 11.20
Balsam Fir <sup>2</sup>	1000	\$ 5.60
Aspen	900	\$ 14.70
Red Oak <sup>3</sup>	1550	\$ 23.80
Mixed Hardwood <sup>4</sup>	5300	\$ 12.60

**TOTAL MINIMUM BID VALUE: \$ 146,118.00**

---

1 White Pine is 61% white pine and 39% red pine. Included is an estimated 218 MBF. (wt. conv. 2.159 tons/cord)

2 Balsam Fir is approximately 86% balsam fir and 14% spruce. (wt. conv. 2.108 tons/cord)

3 Red Oak includes an estimated 108 MBF.

4 Mixed Hardwood is approximately 46% white birch, 32% red maple and 22% hard maple. Includes an estimated 63 MBF. (wt. conv 2.393 tons/cord)

Note: Total sale volume equates to 46.1 tons/acre or 19.6 cords/acre.

Special Conditions:

1. Cutting must be concurrent for all species to be harvested. Do not cut, knock down or utilize any dead trees.
2. No harvesting, skidding or road construction from April 15<sup>th</sup> to July 15<sup>th</sup> due to the risk of oak wilt. Applies to entire sale except for the pine thinning stands.
3. Use existing woods roads for trucking. A short stretch of trail may be used for hauling with DNR forester approval.
4. Minimize equipment crossing points over Escanaba trail. Keep trail free of slash and debris at all times. Trails must be repaired to pre-harvest conditions upon sale completion.
5. All slash within 50 feet of the Escanaba trail must be lopped and scattered to lie within two feet of the ground and pulled back at least ten feet behind the tree line concurrently with cutting.
6. All pine products cut between May 1 and September 1 must be removed from the sale area within three weeks from time of cutting. Pine products cut during the remainder of the year must be removed prior to May 1 of each year.
7. If the contract is to be worked on during multiple time periods a mid-contract "pull-off" inspection meeting will be required. One-week notice shall be given by the contractor prior to moving equipment off-site. During the "pull-off" inspection provisions needing attention will be documented. The contractor at this time can decide to remedy them before pulling off or rectify them when moving back onto the site. If the latter is chosen documented items shall be addressed before harvesting can continue.

