

Mapping Infiltration Rates in Dane County, Wisconsin

Kathleen Arrington

Steve Ventura

University of Wisconsin-Madison


Wisconsin Groundwater Coordinating Council

November 12, 2010, Madison WI

CONTENTS

- Acknowledgments:
 - United States Geological Survey
 - Dane County
- Outline
 - The issue: groundwater recharge
 - Soil infiltration
 - Our research: goals and methods
 - Results
 - Mapping

Lots of people = lots of water

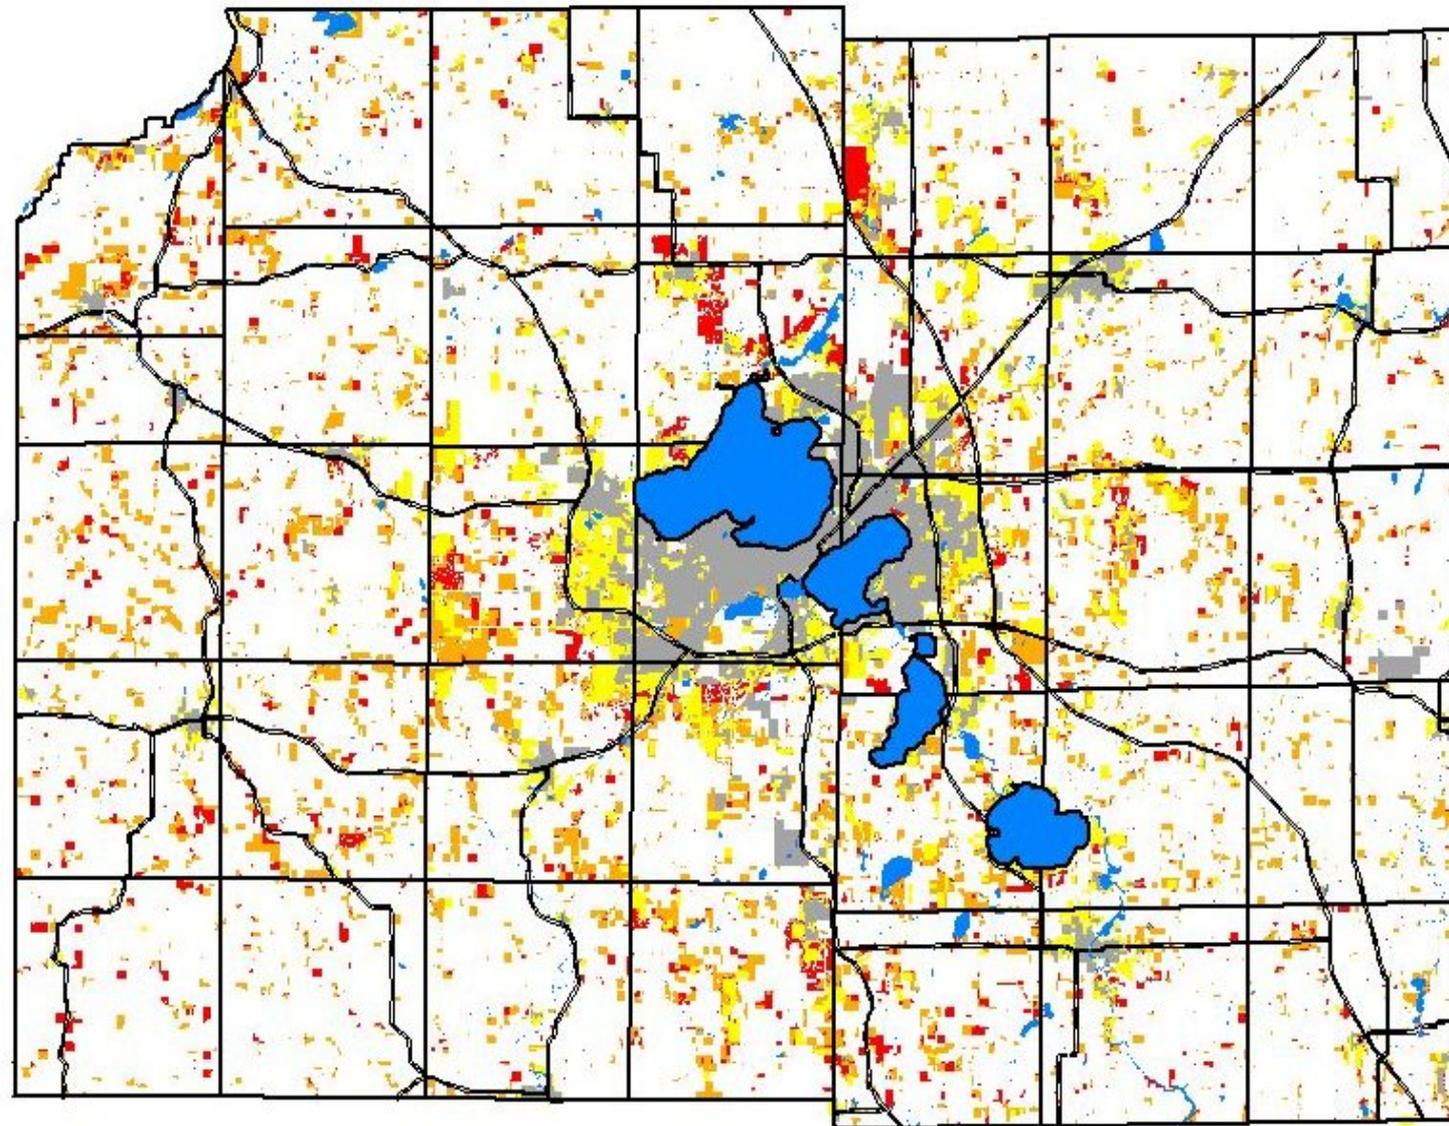

Sprawl Index:

1970 Development

Persons / Acre = **8.36**
Population = 290,272
Devel. Acres = 34,733

1990 Development

Persons / Acre = **5.84**
Population = 367,085
Devel. Acres = 62,875

1995 Development

Persons / Acre = **4.35**
Population = 393,236
Devel. Acres = 90,495

1997 Development

Persons / Acre = **3.68**
Population = 407,584
Devel. Acres = 110,789



0 3 6 9 Miles



Figure 7. Simulated drawdown at water table, 1900-2000. Contours represent water level declines in feet.


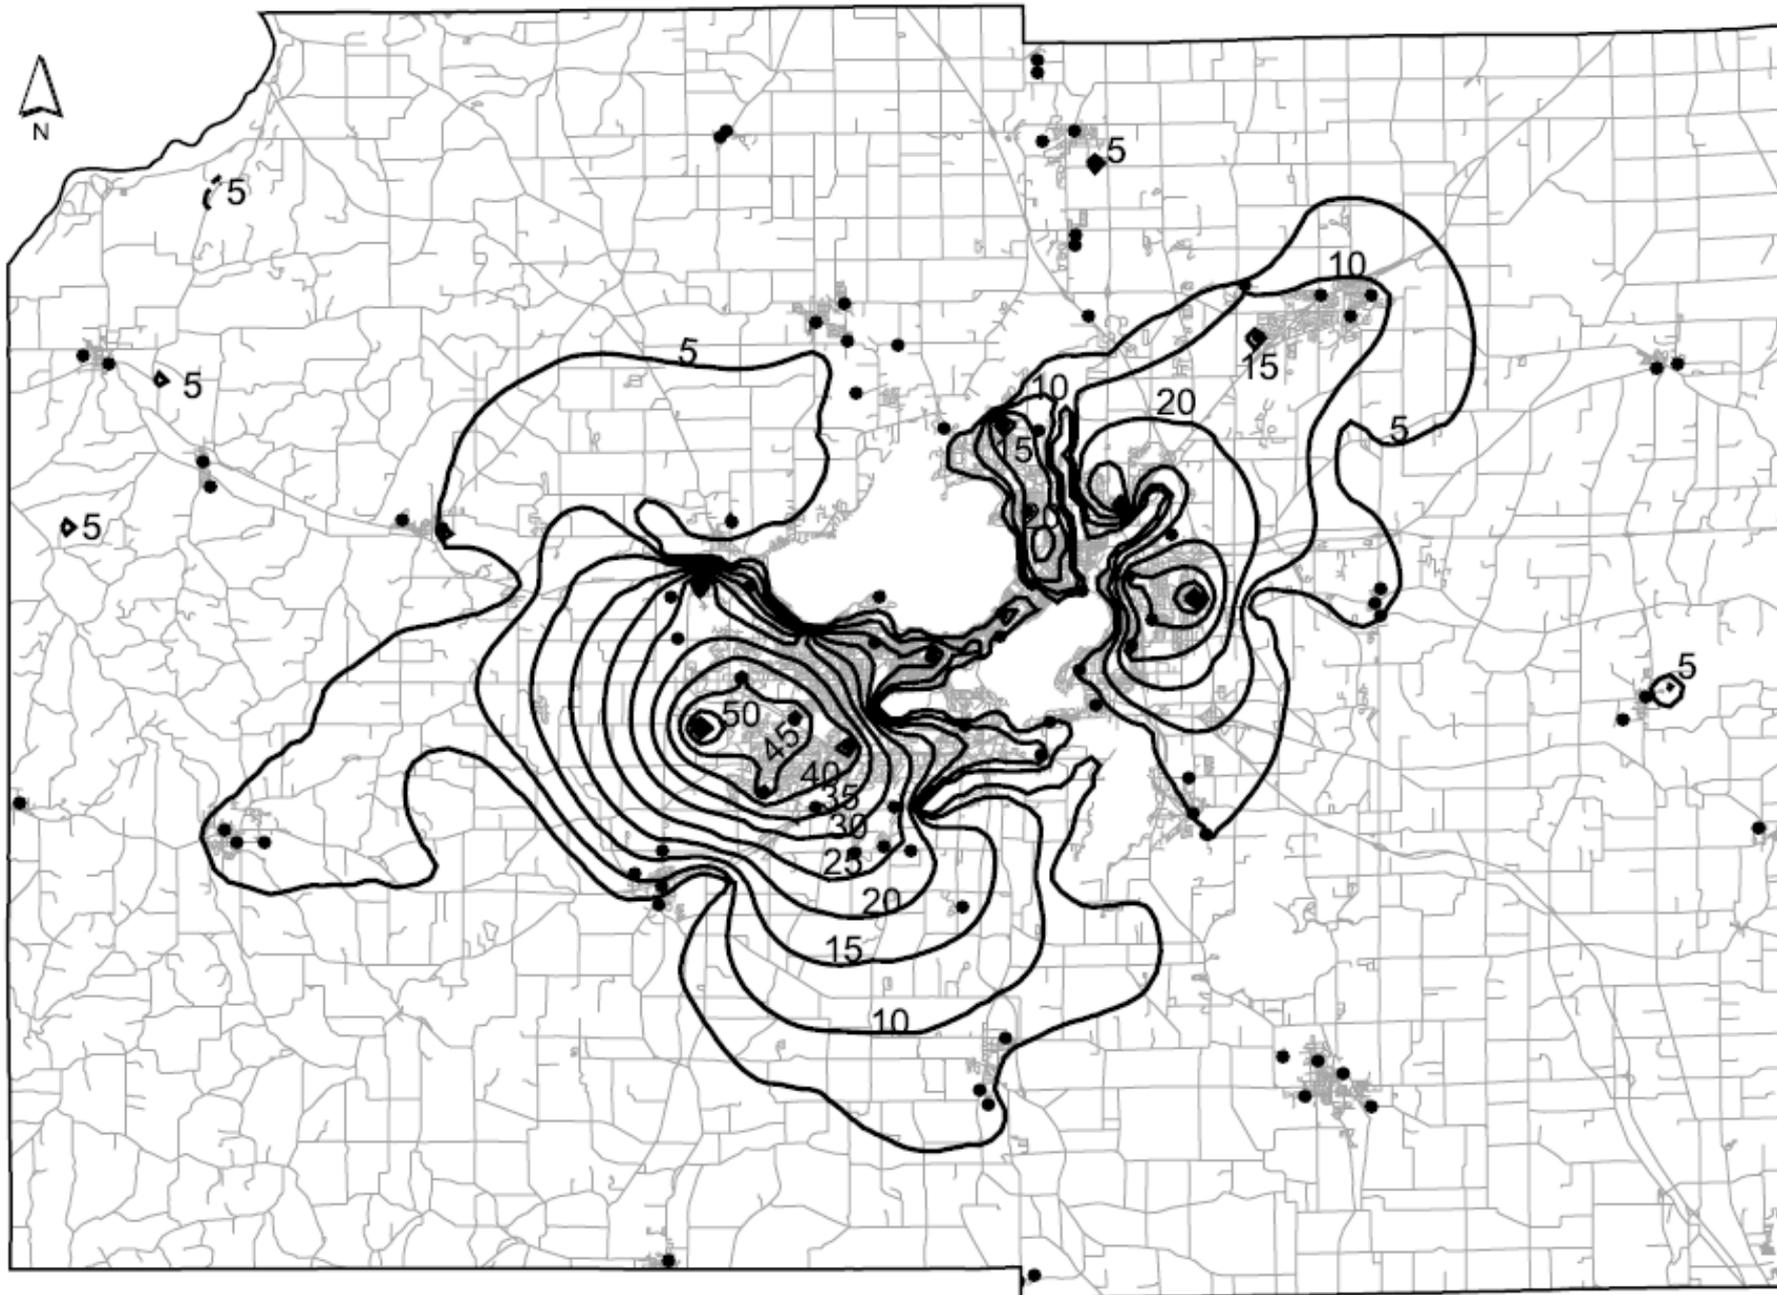


Figure 9. Simulated drawdown at the water table, 2000-2030. Contours represent water level declines in feet.



Causes of groundwater drawdown

- Pumping
- Loss of recharge
 - Development replaces pervious surfaces with impervious surfaces, which:
 - Reduces infiltration
 - Increases runoff

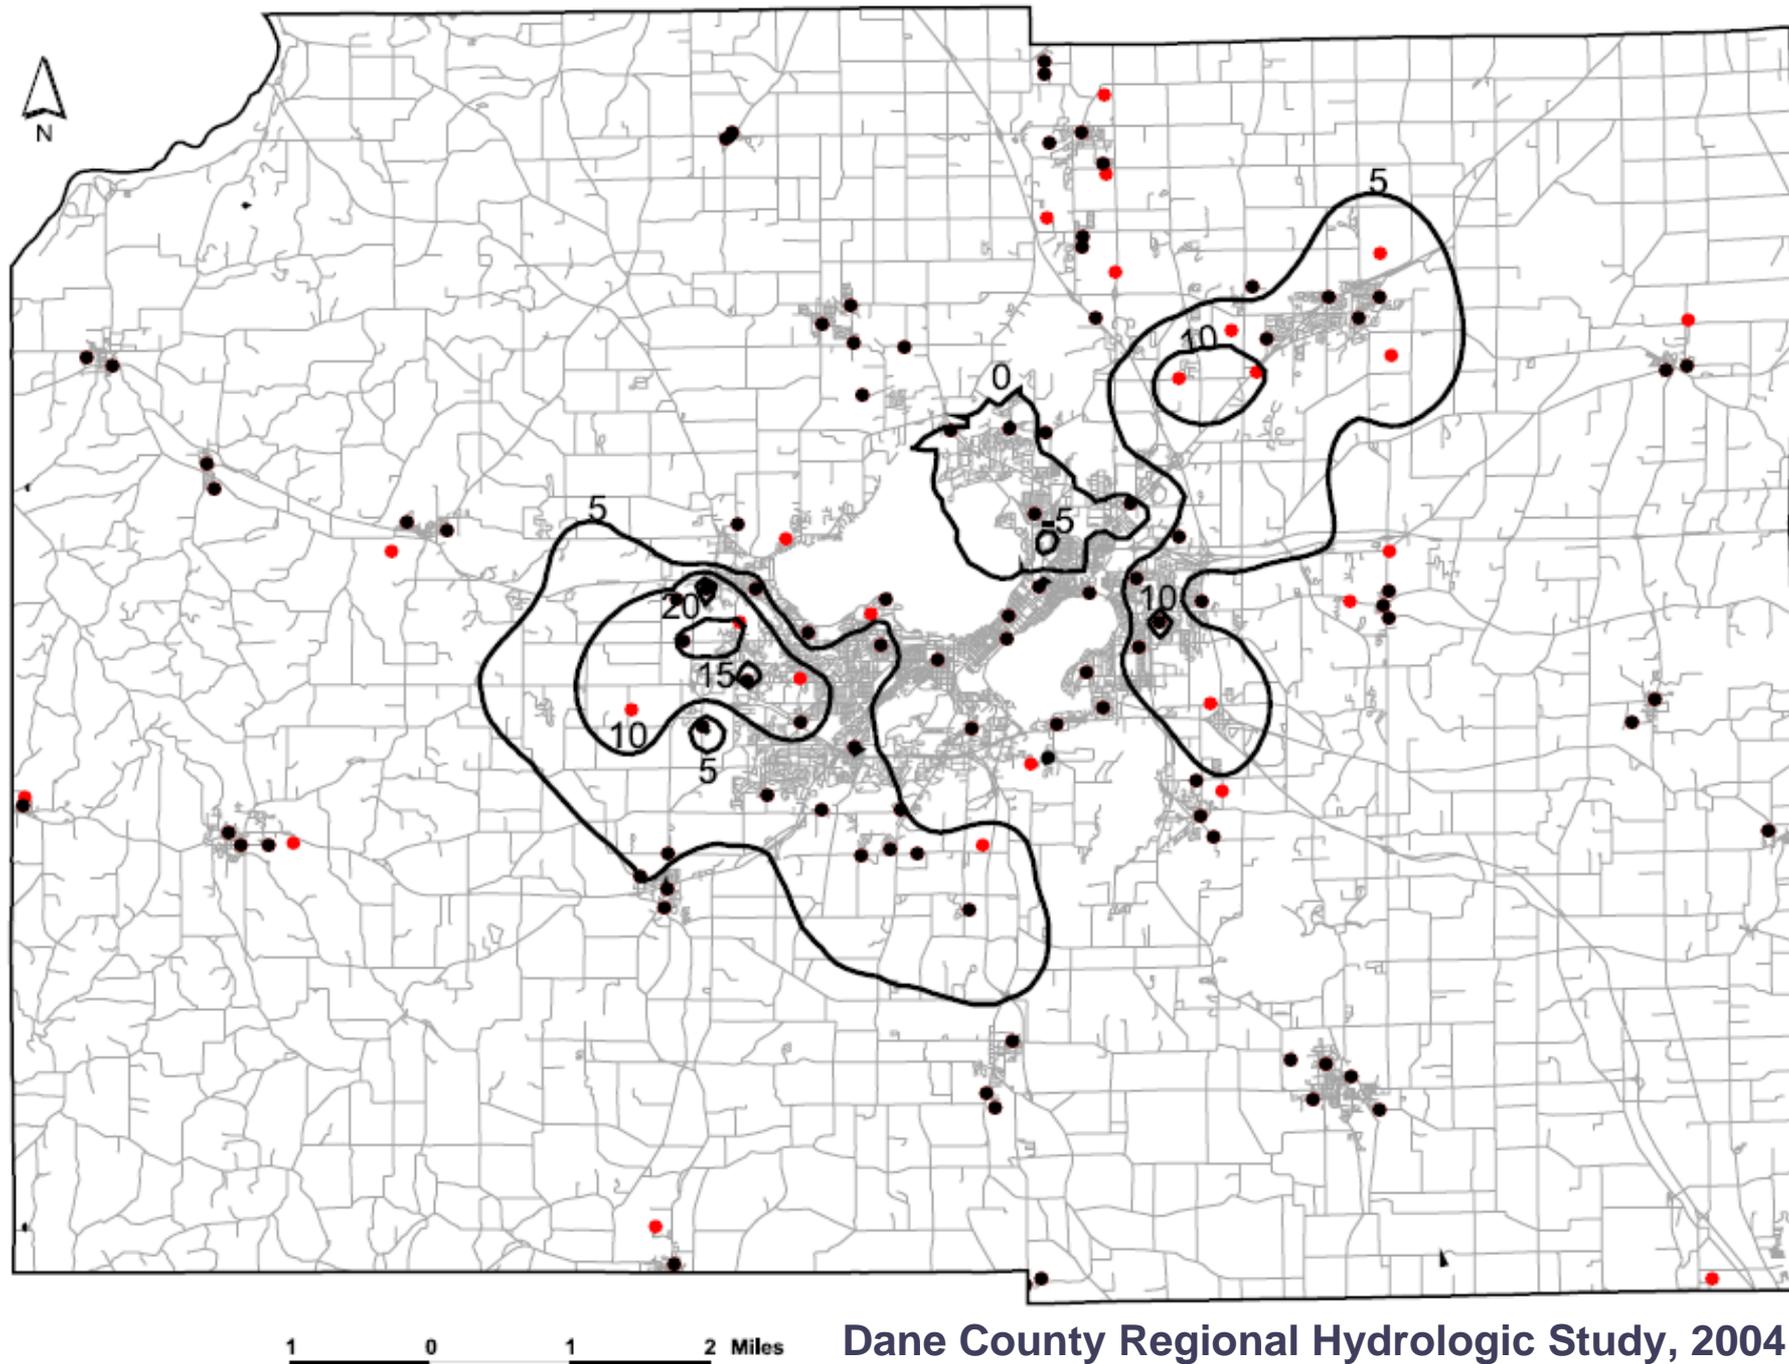

Mitigating loss of recharge

- Practices –
 - Infiltration basins
 - Rain gardens
- Maintain soil capacity



Infiltration suitability

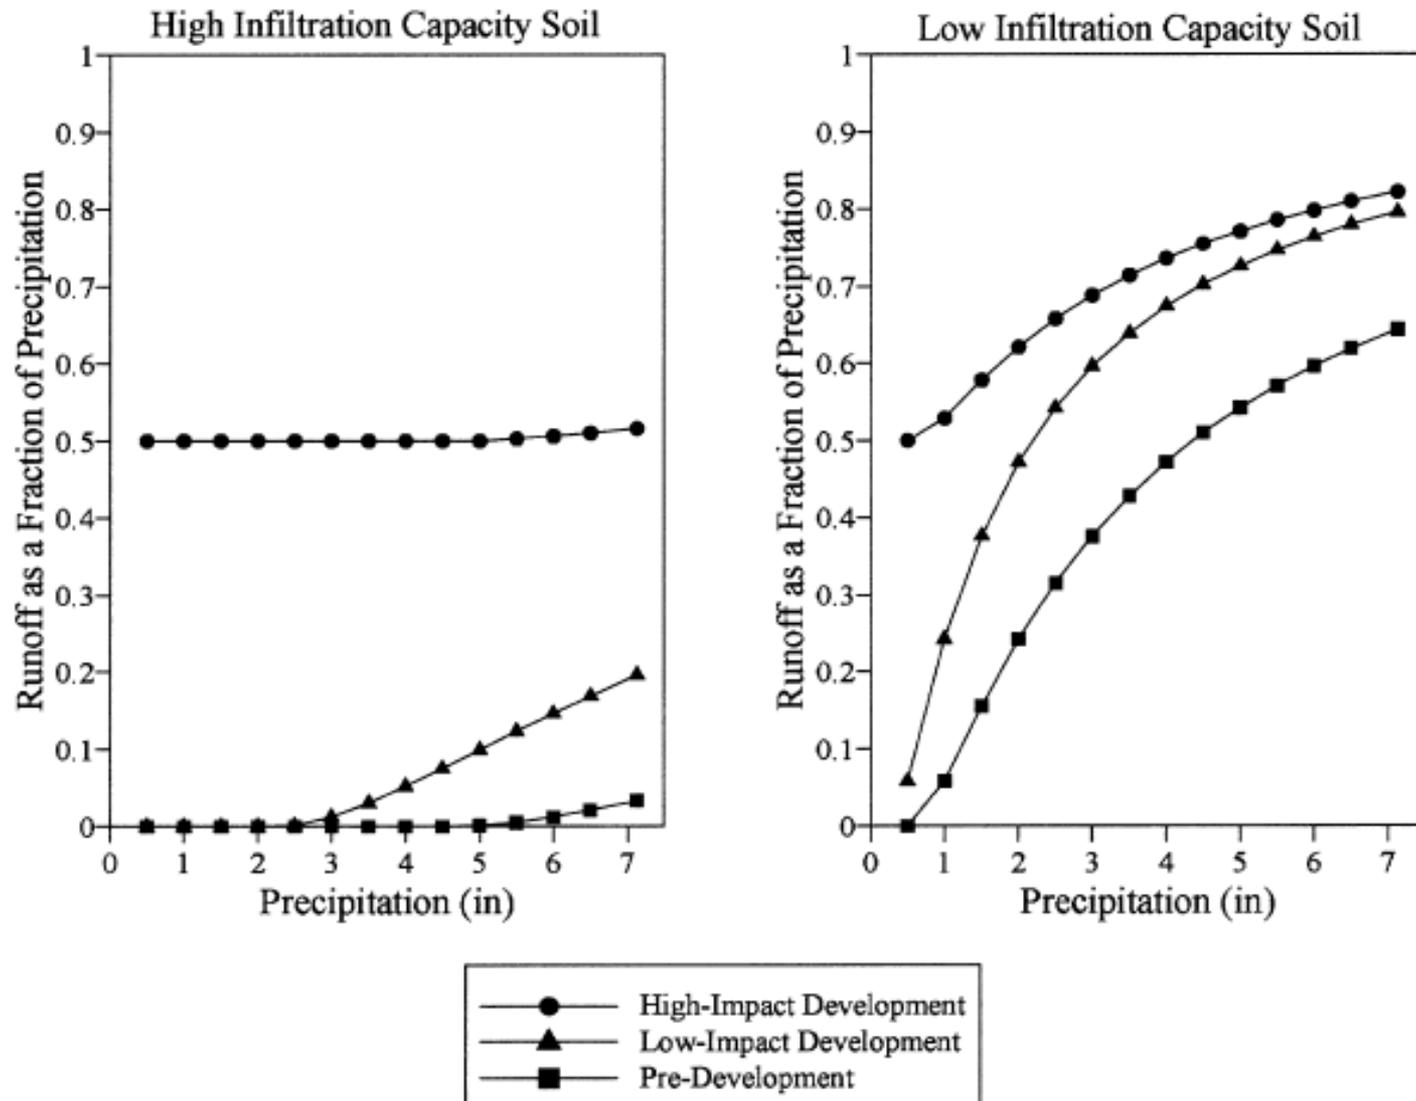


Figure 4. Runoff Fraction Under Different Development Scenarios. High infiltration capacity soil is modeled using SCS soil classification 'A' and low infiltration capacity soil is modeled using SCS soil classification 'D.'

The background is a map of a region, likely in the Mediterranean or Middle East, showing soil infiltration properties. The map is overlaid with a grid and contains several labels: 'Na' (sandy soil), 'Tb' (clayey soil), 'Fc' (fine clay), 'Cc' (clayey clay), and 'La' (loam). There are also some numbers like '0795' and '10' visible. The text 'Background – soil infiltration properties' is centered in red.

**Background –
soil infiltration properties**

What determines infiltration rates?

- Soil properties
 - Texture
 - Structure- macropores and micropores
- Other (?)




What determines infiltration rates?


- Soil properties
 - texture
 - structure- macropores and micropores
- Other
 - topography
 - land cover



Infiltration over time

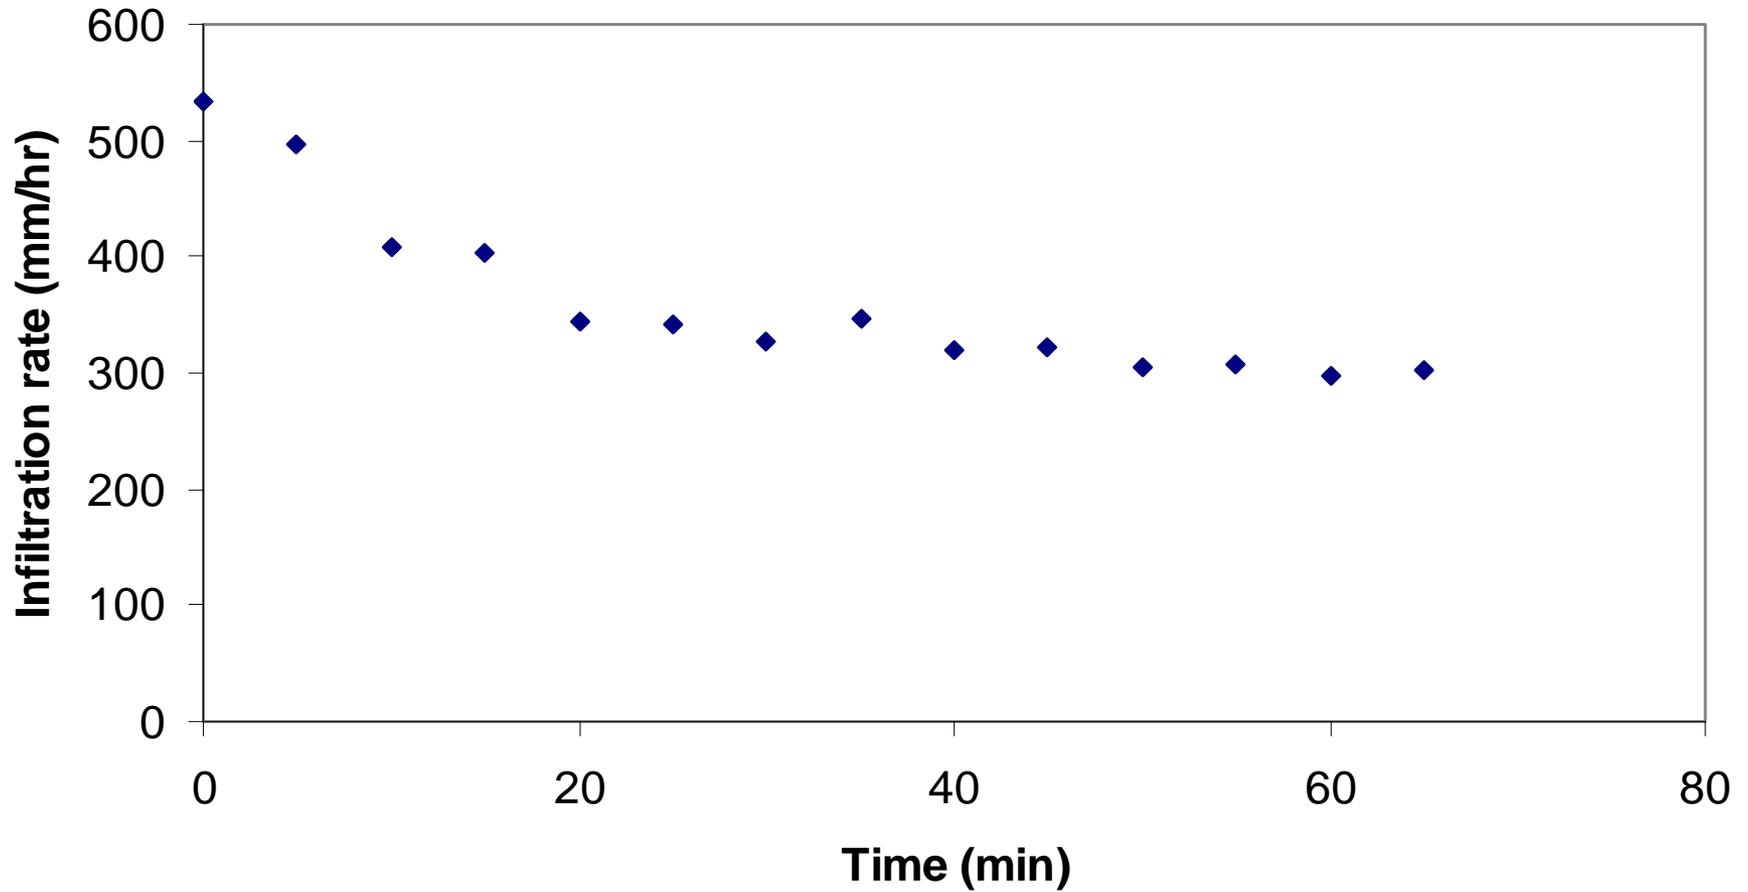

Infiltration over time

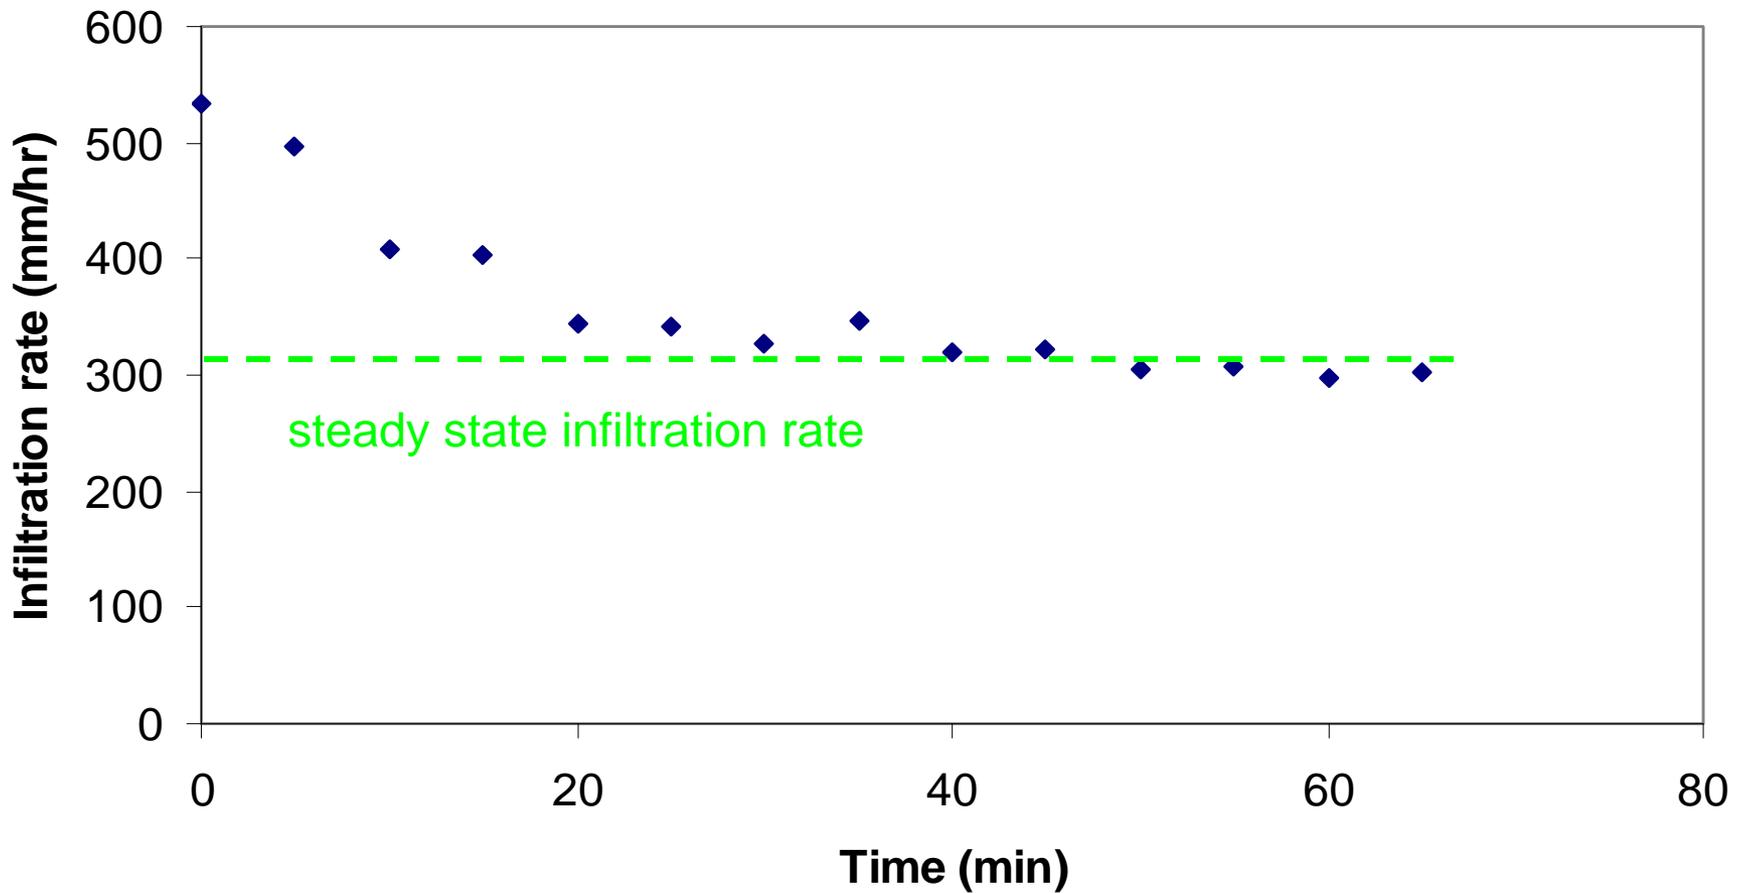

Comparing infiltration rates: saturated hydraulic conductivity (K_{sat})

- Key to identifying important recharge areas
- Calculated from steady-state infiltration rate (Reynolds, 1990)
- Accounts for differences in ponding depth and lateral flow

Modeling K_{sat} – pedotransfer functions (ptfs)

- Relationships between soil hydraulic properties (such as K_{sat}) and other soil properties:
 - Texture
 - Bulk density
 - Organic matter content

PTFs with non-soil inputs

- Romano and Palladino (2002):
 - Added topographic information to existing PTFs
 - Slope and aspect improved some soil water retention predictions
- Sharma et al. (2006)
 - Created PTFs from local data: soils only and soils + topography, vegetation
 - Topography and vegetation generally improve soil water retention predictions
 - Improved resolution of prediction maps

Project goals


- Develop a database for Dane County of field measured infiltration rates, soil properties and non-soil properties (landcover, topography)
- Establish relationships between infiltration rates and soil and non-soil properties (PTFs)
- Create a county-wide map of relative infiltration rates

Why not use an existing model?

- Usually macropore flow is not considered
- Existing K_{sat} models only use soil properties as inputs
- Spatial resolution limited to detail of soil maps

Hypotheses

- Locally-developed PTFs will have lower prediction error than the following K_{sat} estimates:
 - Soil Survey (SSURGO, NASSIS database)
 - Texture/porosity table (Rawls et al., 1998)
 - Rosetta (Schaap et al., 2001)
 - Kozeny-Carman (Ahuja et al., 1984; Rawls et al., 1998)
 - PALMS (Bonilla et al., 2008)
- PTFs that include non-soil properties will have lower prediction error than those based on soil properties alone

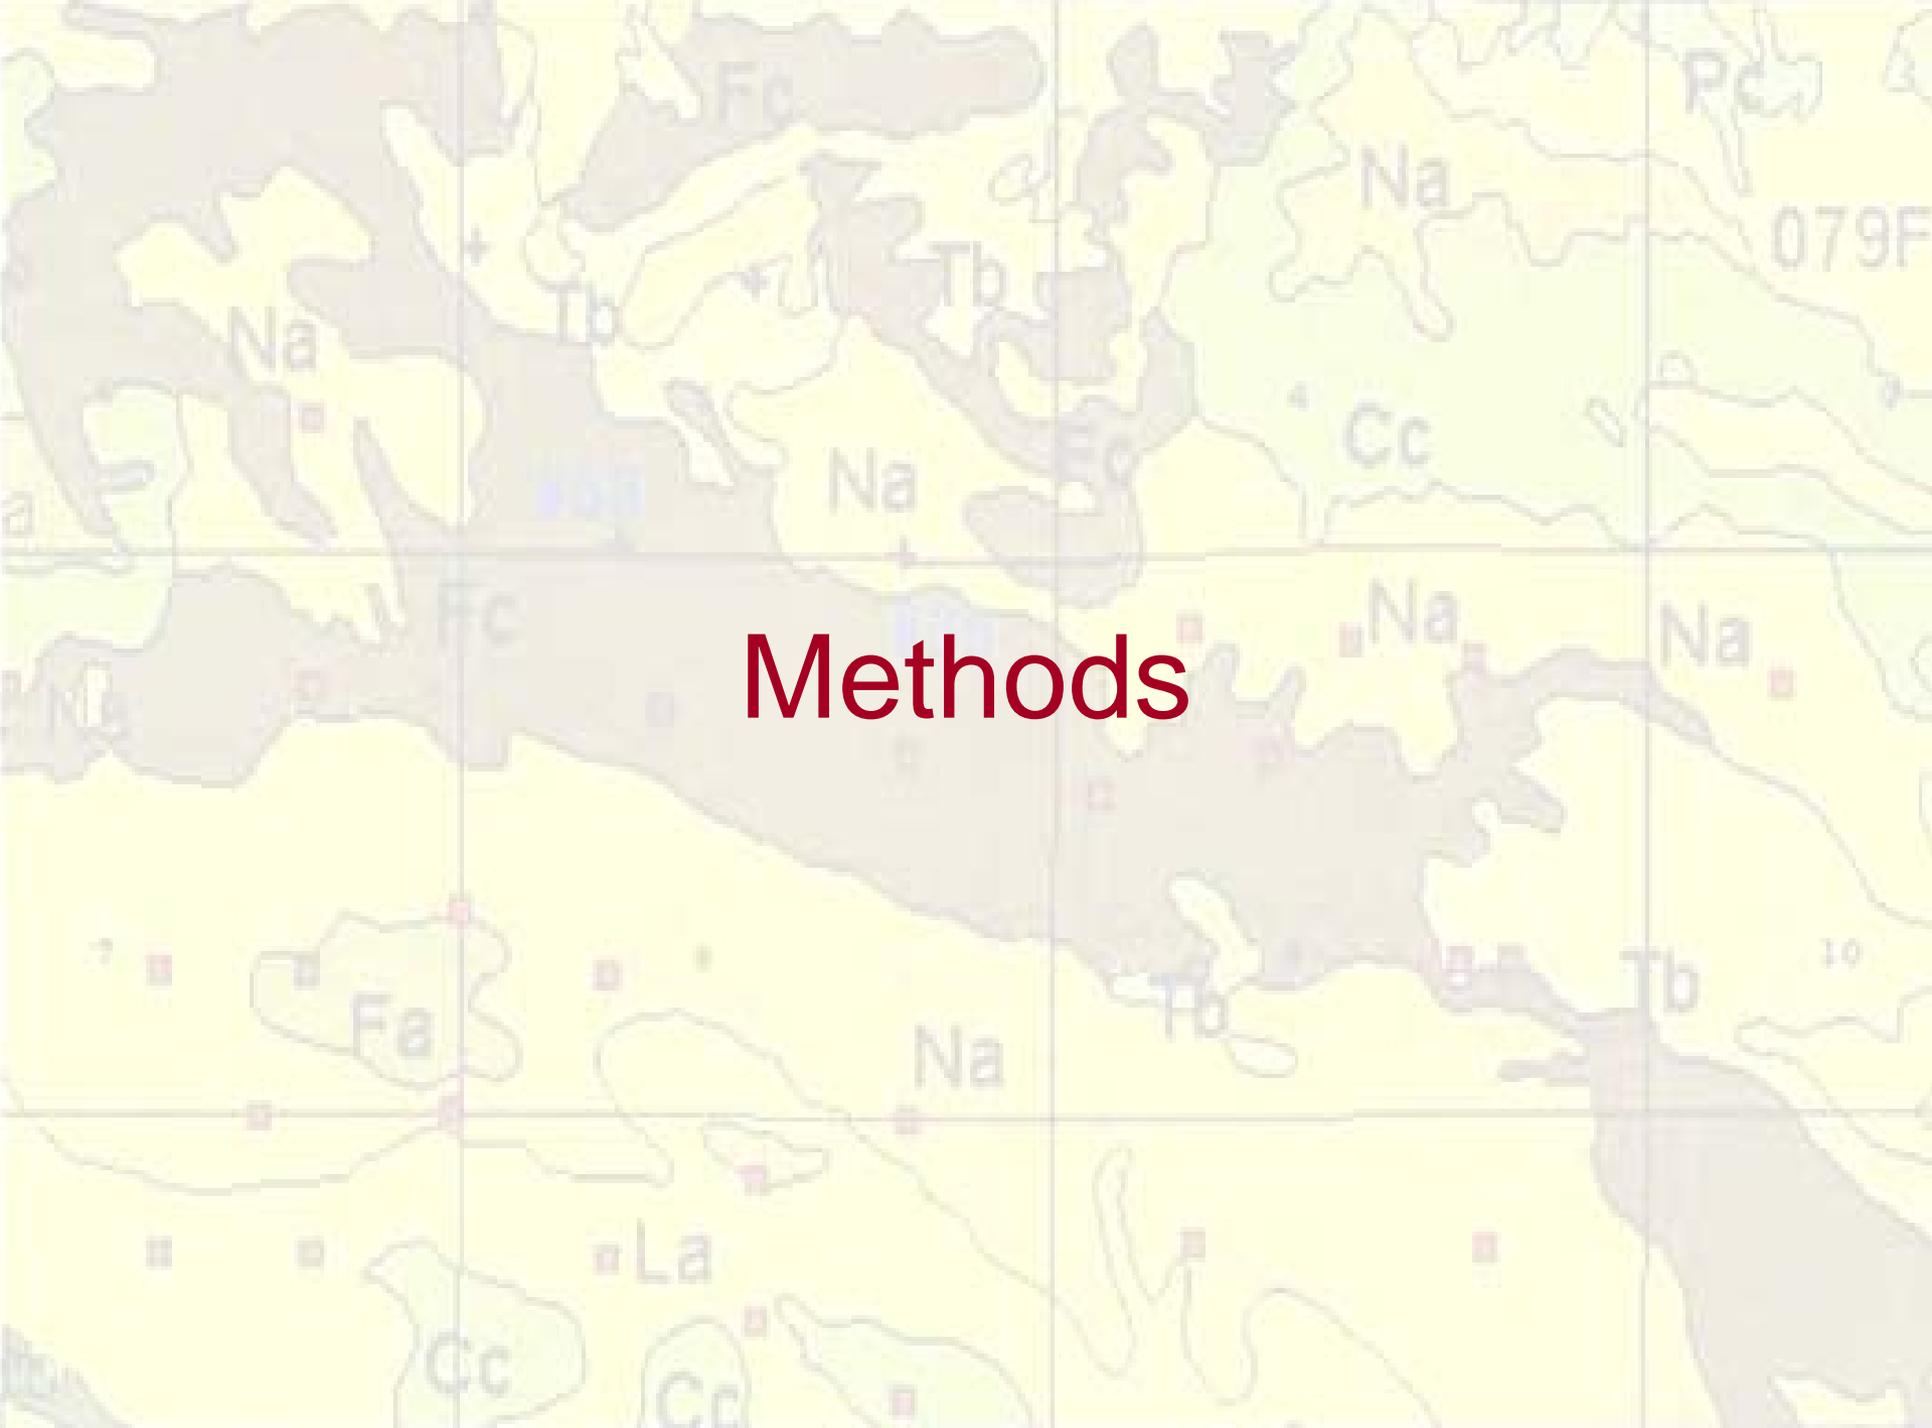

Methods
















Soil Samples

Soil samples:

- 4 depths (0, 15, 30, 45cm)
- 2-3 replicates
- Analyzed for:
 - Organic matter (LOI)
 - Bulk density
 - Particle size distribution (hydrometer method)

Infiltration sites

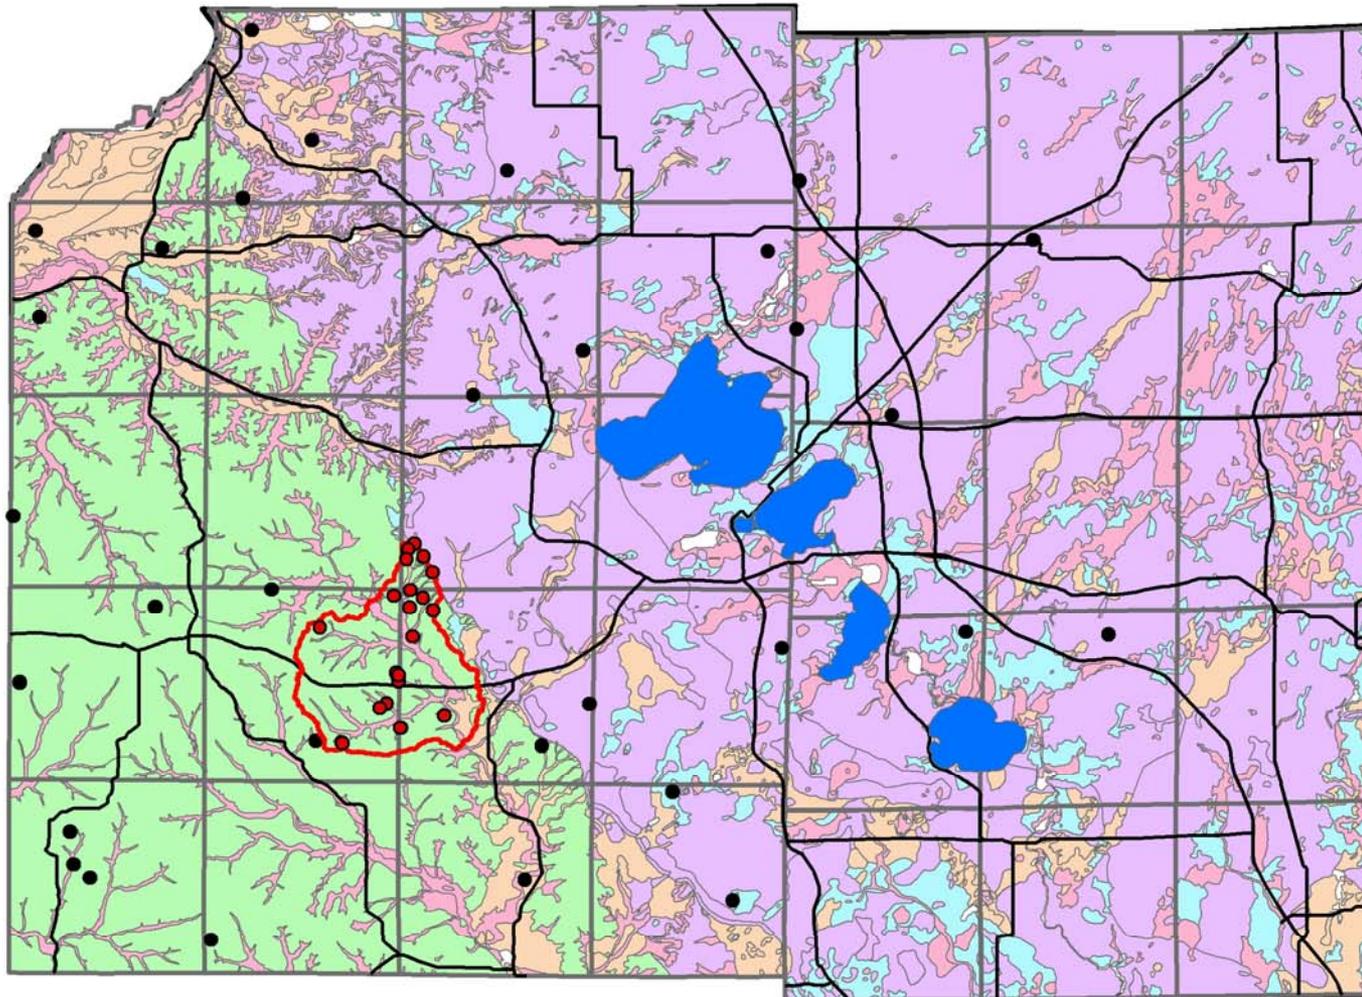

Legend

-  Watershed 58
-  2007 points
-  2008 points

Pleistocene Geology

-  Alluvial Deposits
-  Driftless
-  Glacial Outwash
-  Glacial Till
-  Lacustrine
-  Lakes
-  Major Roads



Geologic Regions

Geology

Percentage of sites

Percentage of county

Driftless

51

20

Glacial Till

27

49

Glacial Outwash

12

9

Alluvial Deposits

4

12

Lacustrine

6

7

Soils

- 25 different soil series
- 37 different soil map units- covering 47% of Dane County
- 11 of 12 soil textural classes

Percent of total samples/area

Texture	Measured 0-30cm	NASIS Horizon 1	Measured 30-60cm	NASIS Horizon 2
Coarse	14	1	14	2
Medium	71	94	54	36
Fine	14	5	32	62

Landcover

Landcover category	Percent of sites	Percent of county area*
Forest	16	14
Grassland/shrub	22	2
Developed	22	13
Pasture/hay	14	19
Cropland	26	46
Other (water, wetlands)	0	8


*based on National Landcover Database (USGS, 2001)



The image shows a geological map with several units labeled: Fc (dark grey), Na (light grey), Tb (medium grey), Cc (light green), and La (light yellow). A large, irregular grey area is highlighted in the center of the map. The word "Results" is written in red text across this highlighted area. The map also features a grid of latitude and longitude lines, with some numerical values like "0795" and "10" visible.

Results


Infiltration measurements

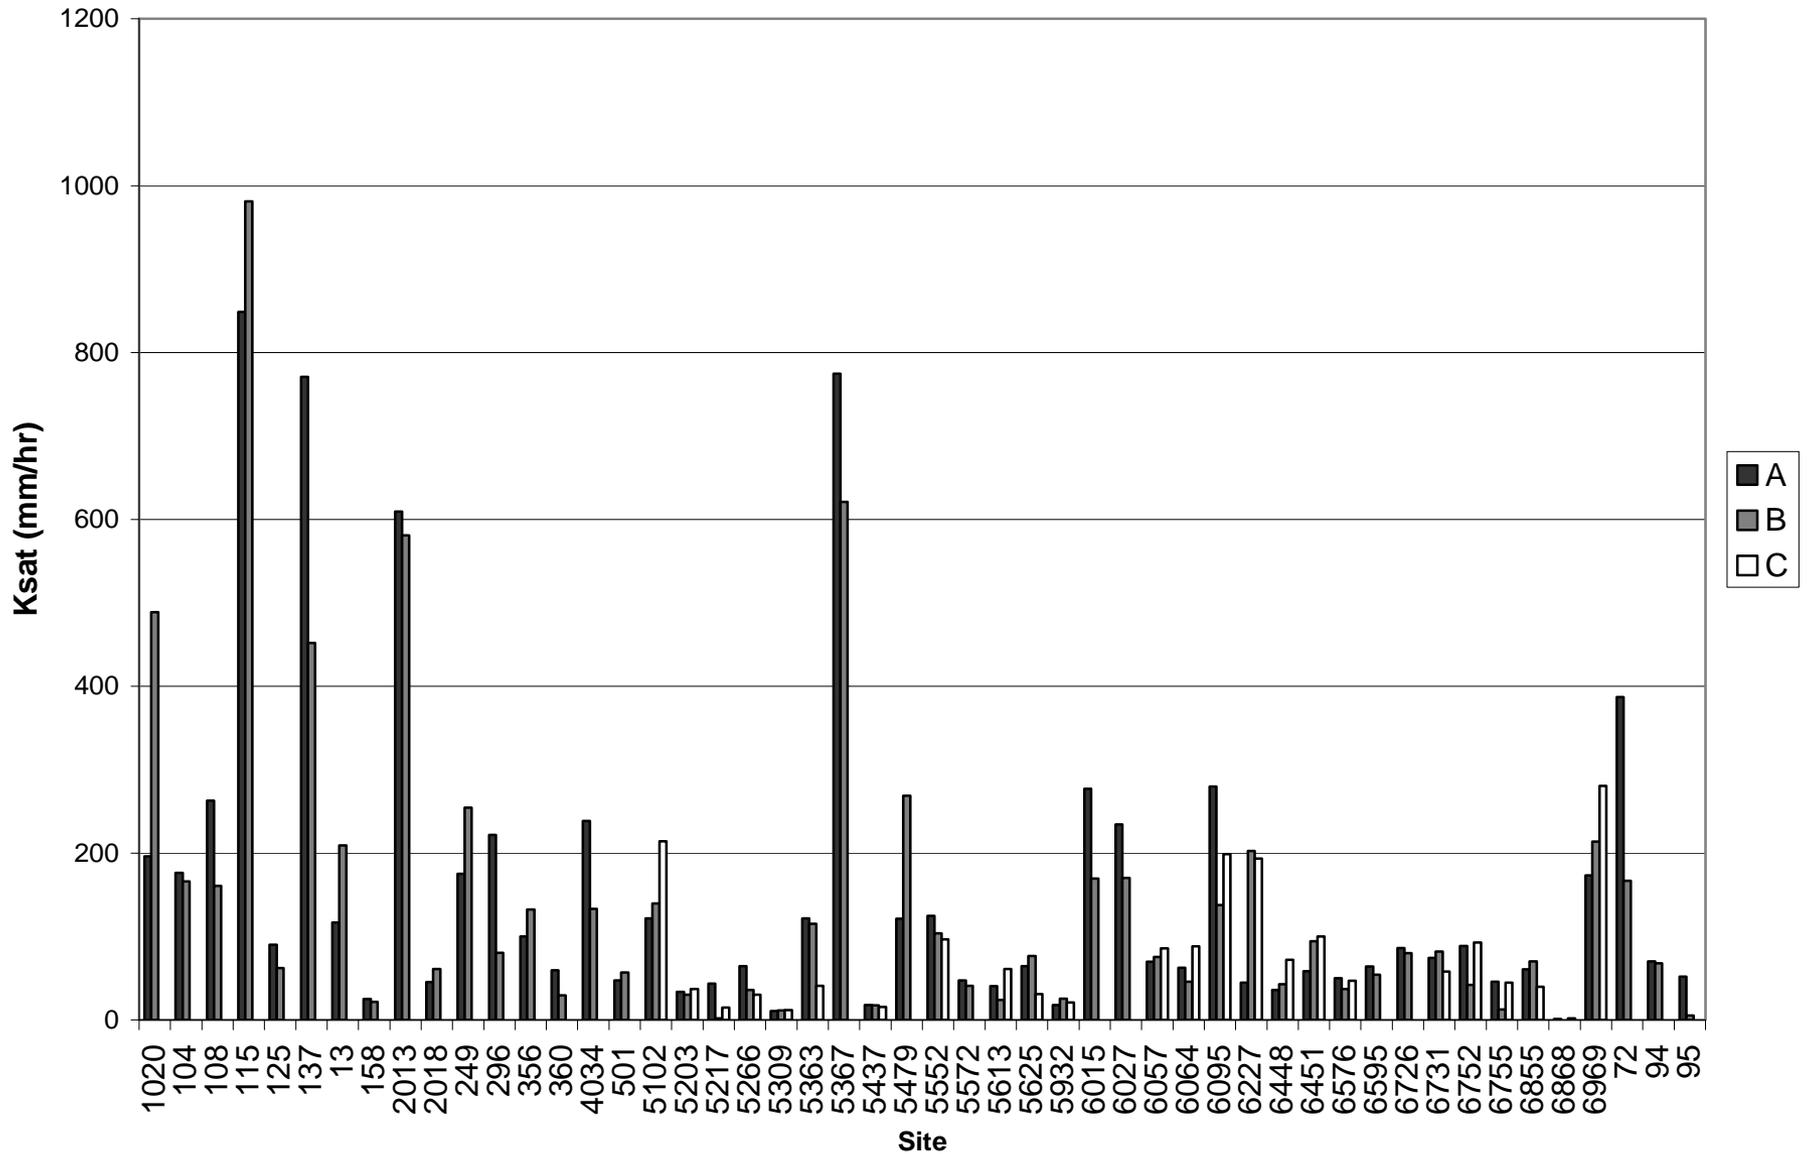

Texture	Porosity	Ksat (mm/hr)			Measured	
		Rawls (98)*	Rawls (92)	PALMS	Ksat (mm/hr)*	Number of sites
Sand	-		210.0	210	360.1	2
	0.44	181.9				
	0.39	91.4				
Loamy sand	-		61.1	122.2	181.1	6
	0.49	123.0				
	0.39	41.4				
Sandy loam	-		25.9	103.6	60.9	6
	0.47	55.8				
	0.37	12.8				
Loam	-		13.2	66	73.7	11
	0.47	3.9				
	0.39	6.2				
Silt loam	-		6.8	47.6	60.0	11
	0.49	14.4				
	0.39	3.4				
Sandy clay loam	-		4.3	38.7		
	0.44	7.7				
	0.37	2.8				
Clay loam	-		2.3	32.2	49.7	6
	0.48	4.2				
	0.4	0.7				
Silty clay loam	-		1.5	25.5	108.6	6
	0.5	3.7				
	0.43	4.9				
Sandy clay	-		1.2	25.2		
	0.39	0.9				
Clay	-		0.6	24		
	0.48	2.0				
	0.4	1.8				
Silty clay	-		0.9	24.3		
	0.53	1.8				


*Geometric means

K_{sat} by surface textural class

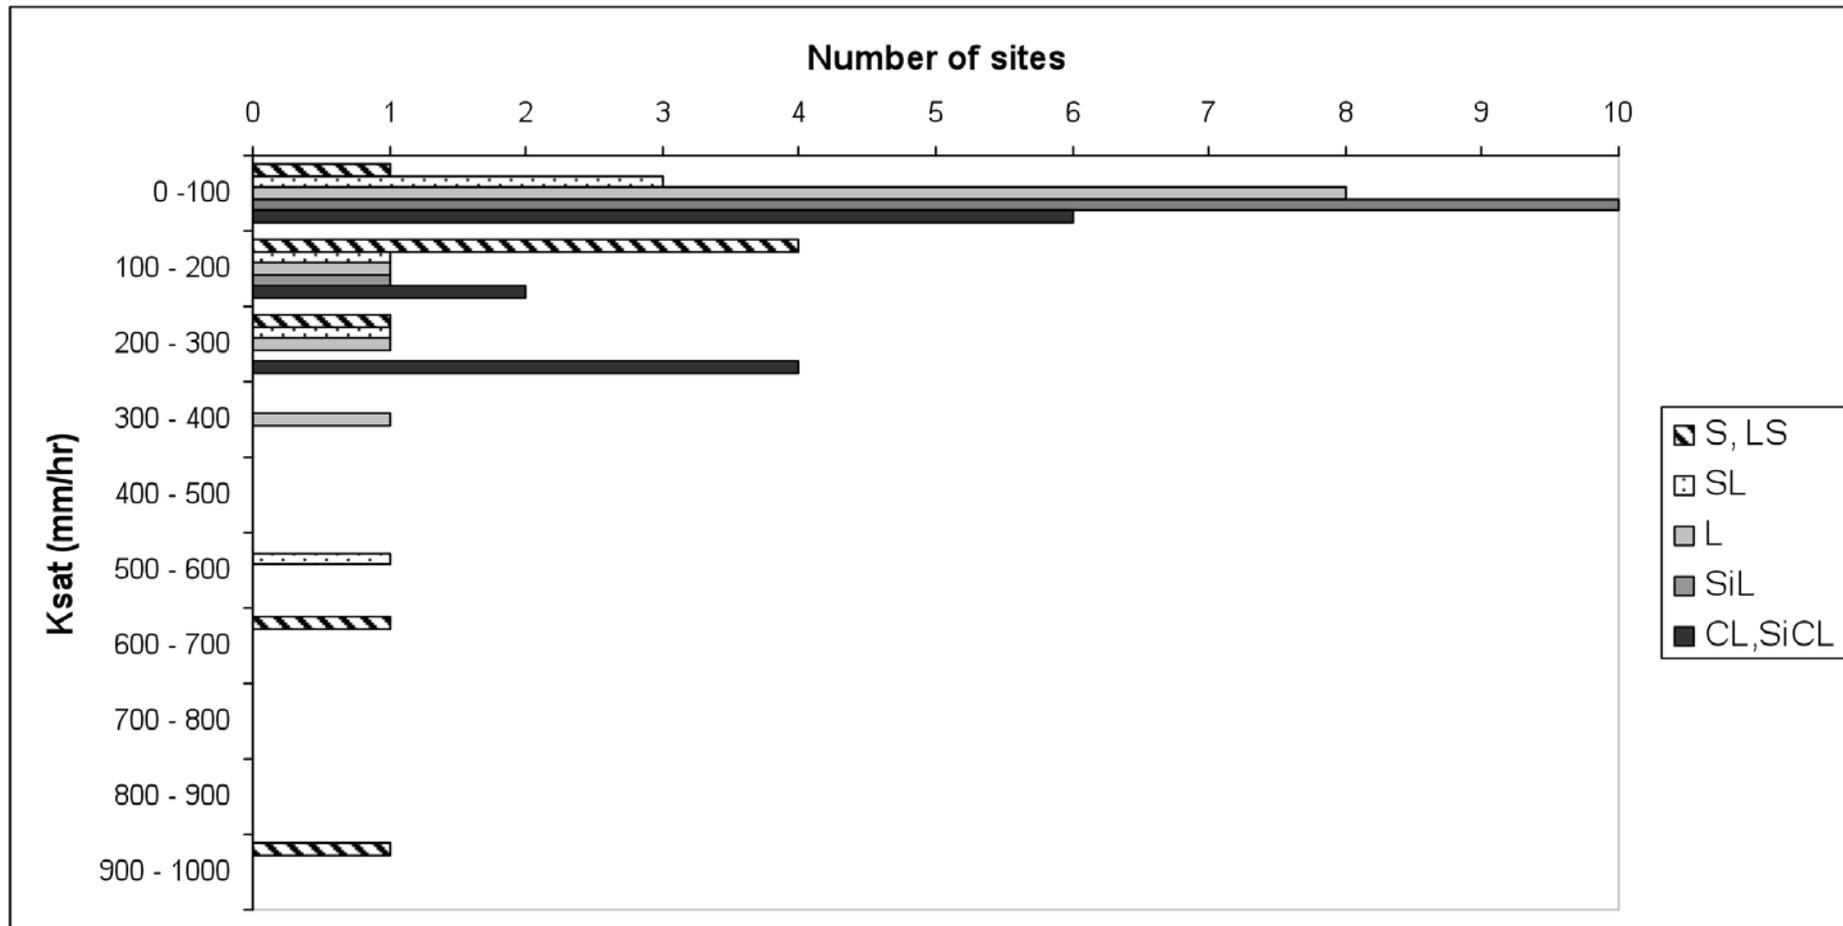

S=sand, LS=foamy sand, SL=sandy loam, L=loam, SiL=silt loam, SCL=sandy clay loam, CL=clay loam, SiCL= silty clay loam, SC=sandy clay, C=clay, and SiC=silty clay

K_{sat} by landcover

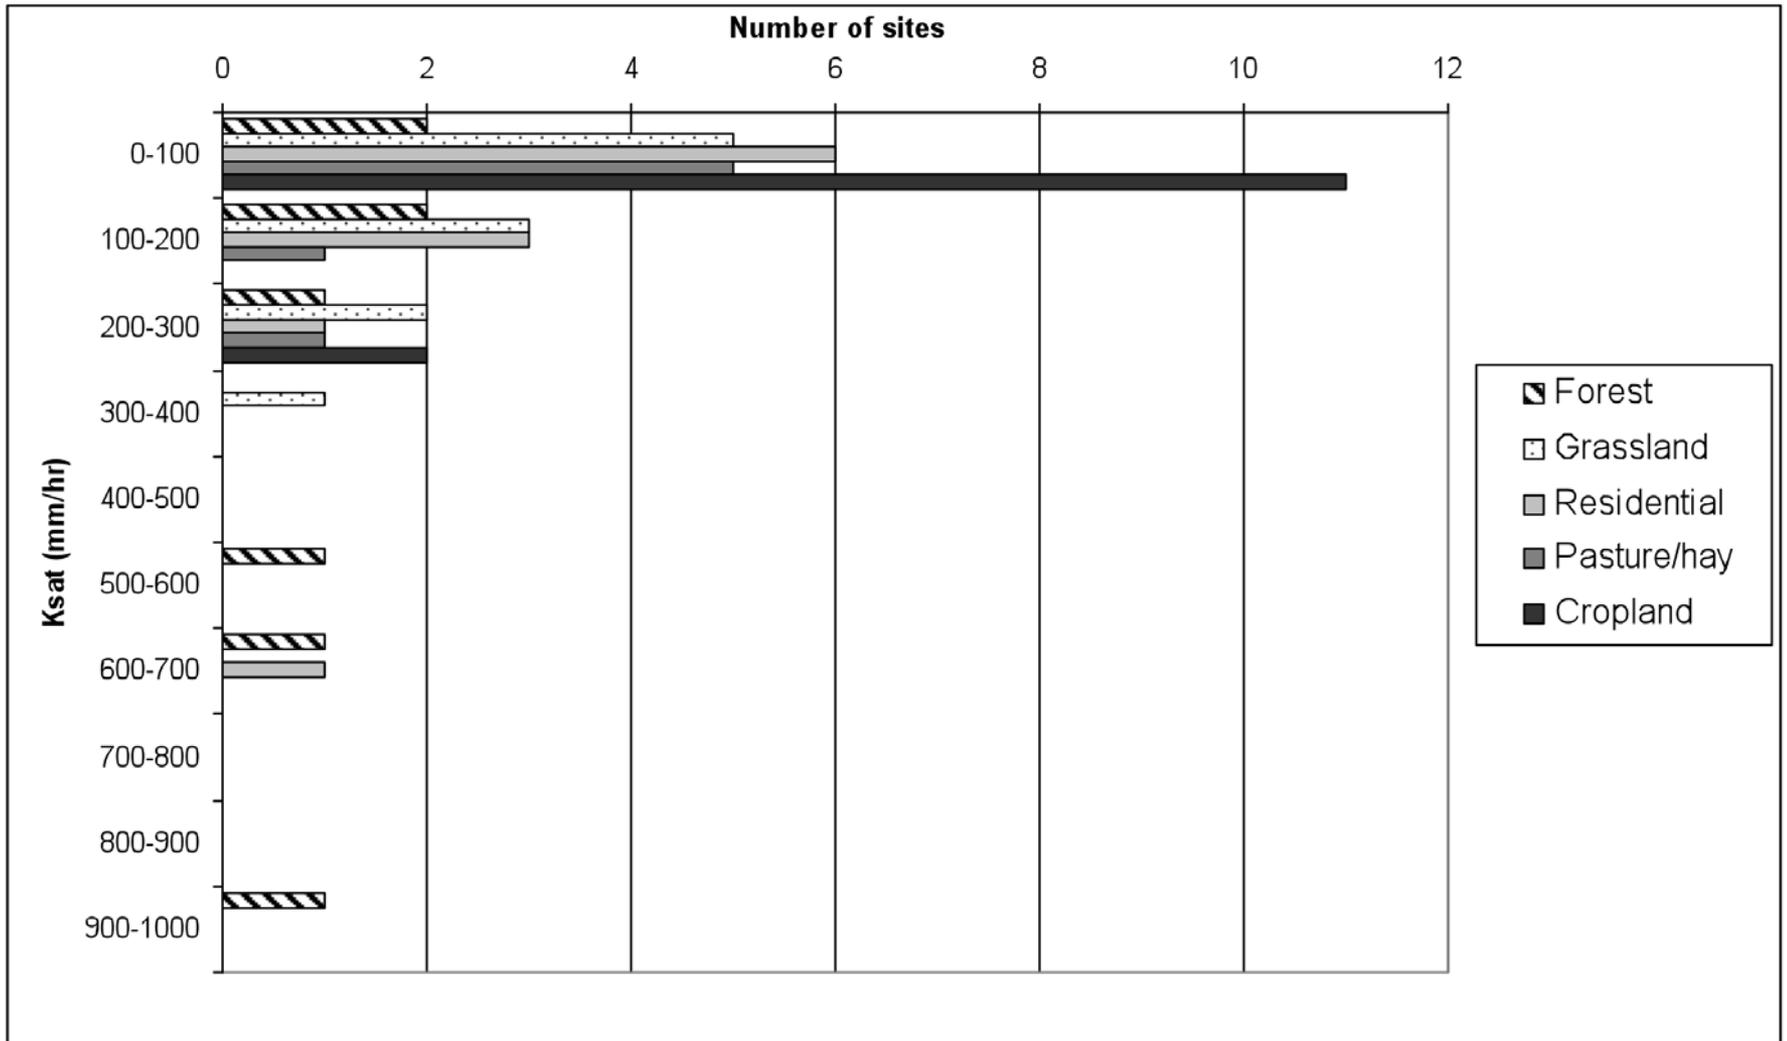

Possible models

Coefficient	Model 1b	Model 2a	Model 2b	Model 3b	Model 4b
Constant	5.55	5.87	7.4	5.5	5.74
Landcover	-0.364		-0.312	-0.351	-0.262
Ln (%sand:0-15cm)		1.19			
Bulk density: 0-15cm					
Bulk density: 15-30cm		-3.89	-1.48		-1.92
Textural class: 0-15cm				-0.276	-0.308
%Organic matter: 15-30cm				0.246	
Elevation					0.00362
R ² adjusted	0.18	0.21	0.212	0.29	0.33
AIC _c	7.85	9.02	8.81	8.68	9.69

How well do these and other models predict K_{sat} ?

- RMSE = root mean squared error
- $\text{RMSE} = \sqrt{(\Sigma(\text{Observed} - \text{predicted})^2 / \text{number of observations})}$

Cross-validation

- Used to evaluate the prediction error of a model without an independent dataset
- Procedure:
 - Remove one observation
 - Develop model
 - Evaluate prediction error of removed observation
 - Repeat for all observations

Model comparison

Model	RMSE
Soil Survey estimate	1.63
Texture-porosity table	2.32
Kozeny-Carman equation	2.28
Rosetta	2.15
PALMS	1.19
Model 1b(landcover)	1.17
Model 2a (Ln(%sand-0to15cm), bulk density-15to30cm)	1.06
Model 2b (landcover, bulk density- 0to15cm)	1.06
Model 3b (textural class-0-15cm, %organic matter-15-30cm, landcover)	1.06
Model 4b (textural class-0-15cm, bulk density-15-30cm, landcover, elevation)	1.02


The background is a map of a region, possibly a coastal or island area, with various shaded regions and labels. The labels include 'Na', 'Tb', 'Fc', 'Cc', 'La', and 'Pc'. There are also some numbers like '0795' and '10'. The map is overlaid with a grid of latitude and longitude lines. The text 'Infiltration Maps' is centered over the map in a red font.

Infiltration Maps


Extrapolating results

- Data Sources:
 - SSURGO map units (1:15,840) combined with representative values from NASIS database:
 - Percent sand (surface horizon)
 - Bulk density (surface horizon)
 - National Land Cover Database (NLCD) (USGS, 2001): 30m resolution




Verona: township: percent sand

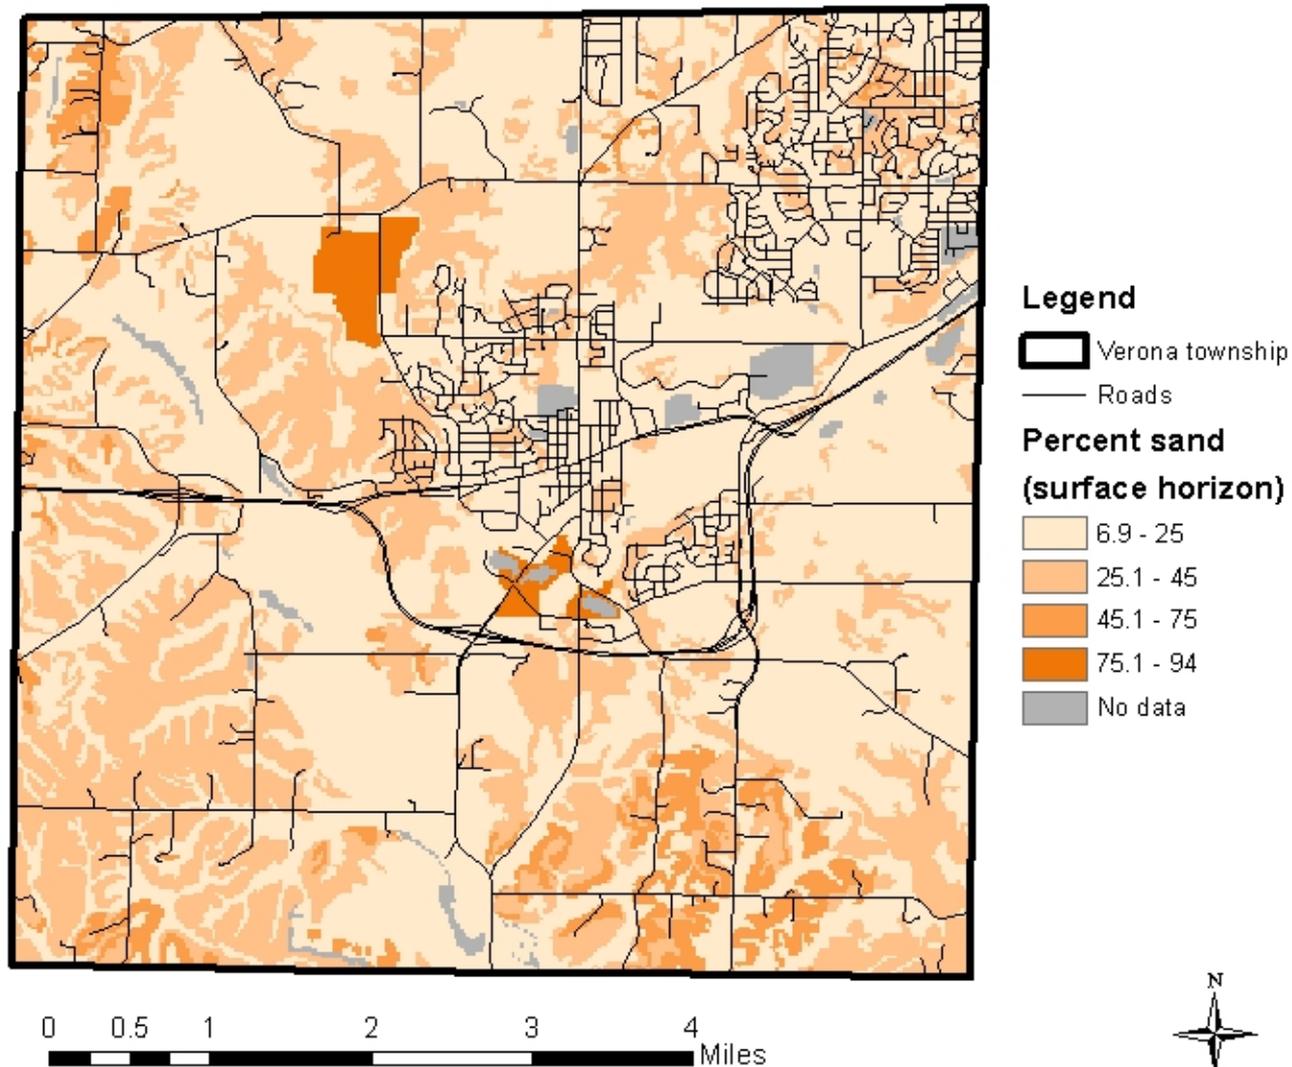


Verona township: bulk density

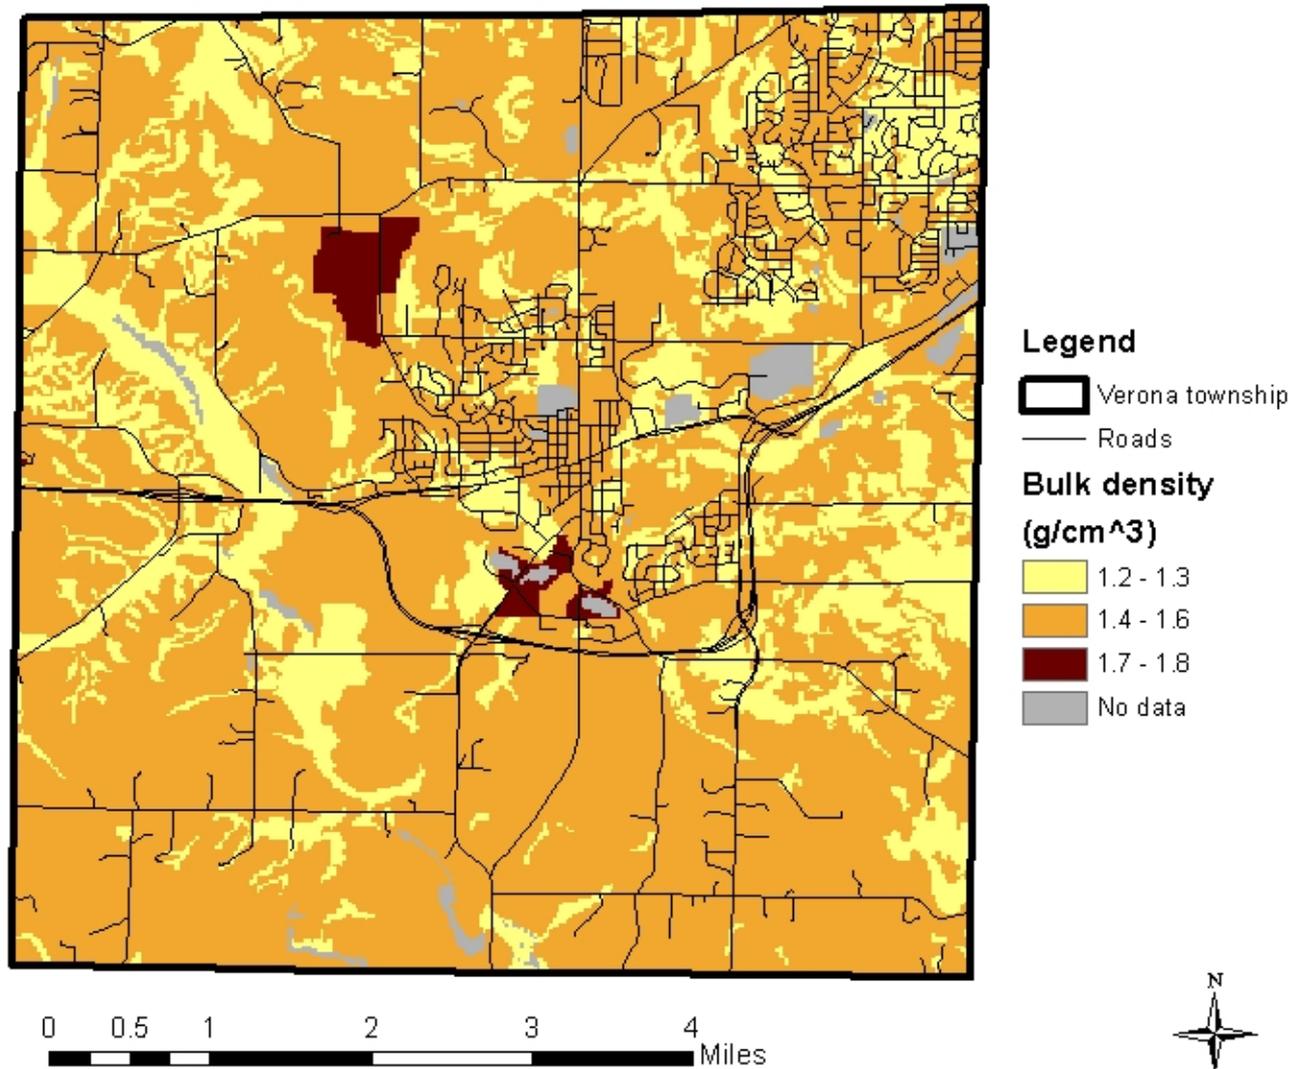

Verona township: infiltration (soil property model)

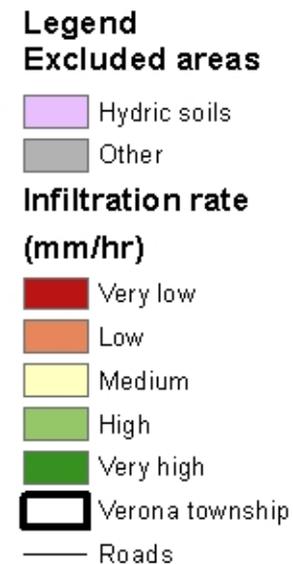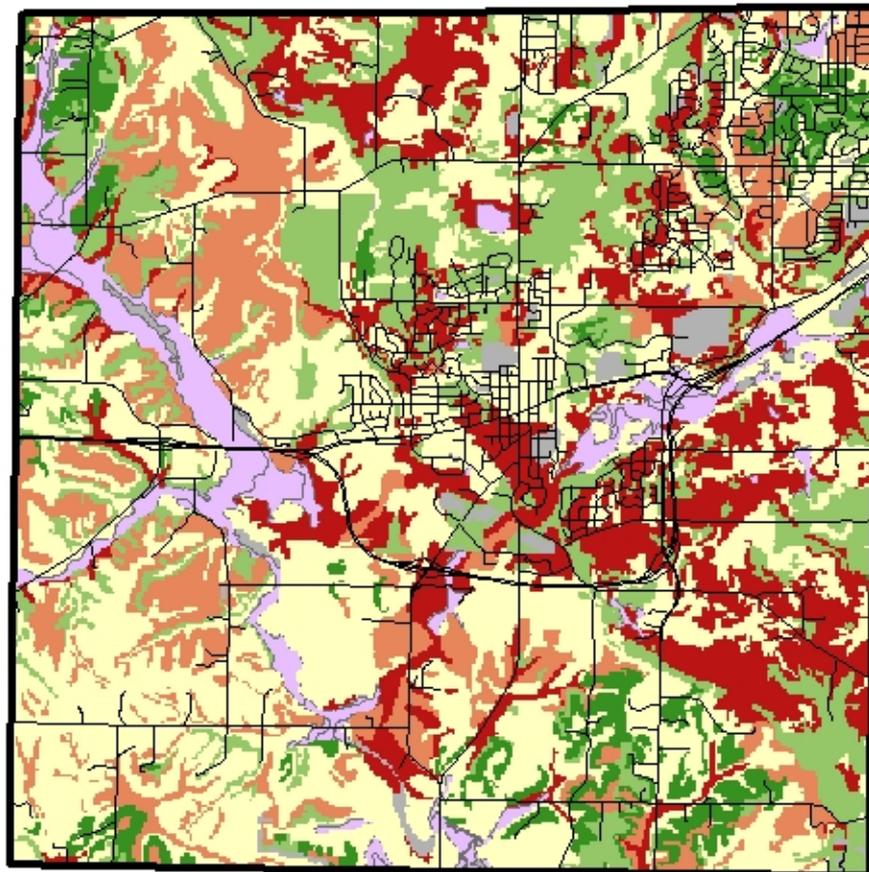

Verona township: landcover

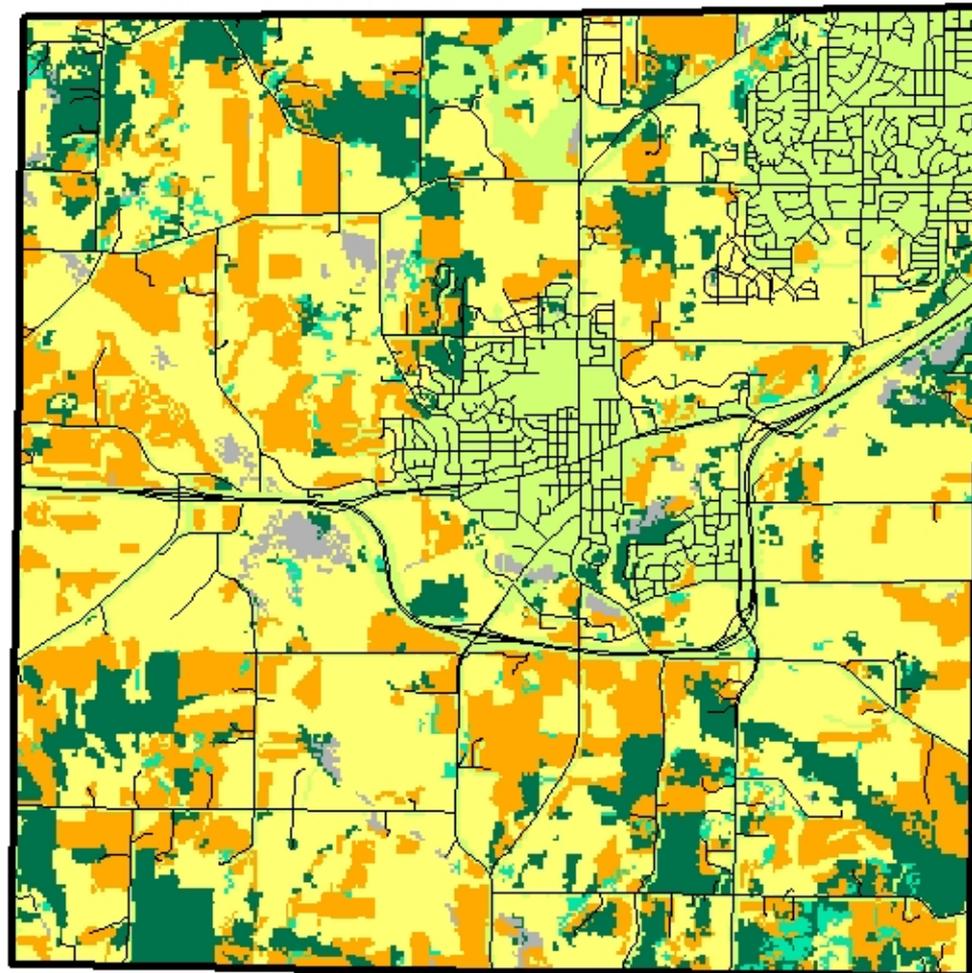



Legend Landcover

- Forest
- Grassland
- Developed
- Pasture/hay
- Cropland
- No data
- Roads
- Verona township


0 0.5 1 2 3 4 Miles




Verona township: infiltration (soil/landcover model)

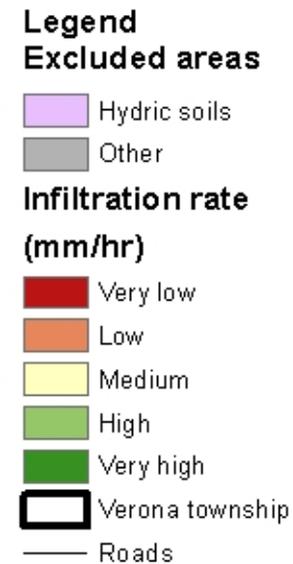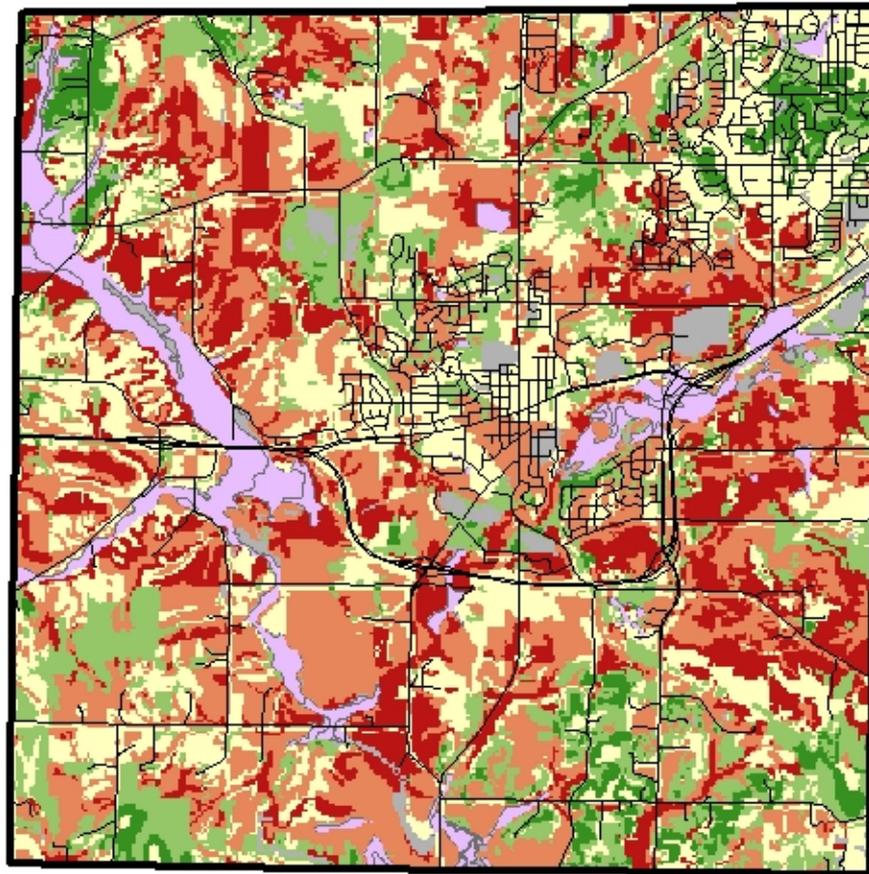

Predicted infiltration: soil property model

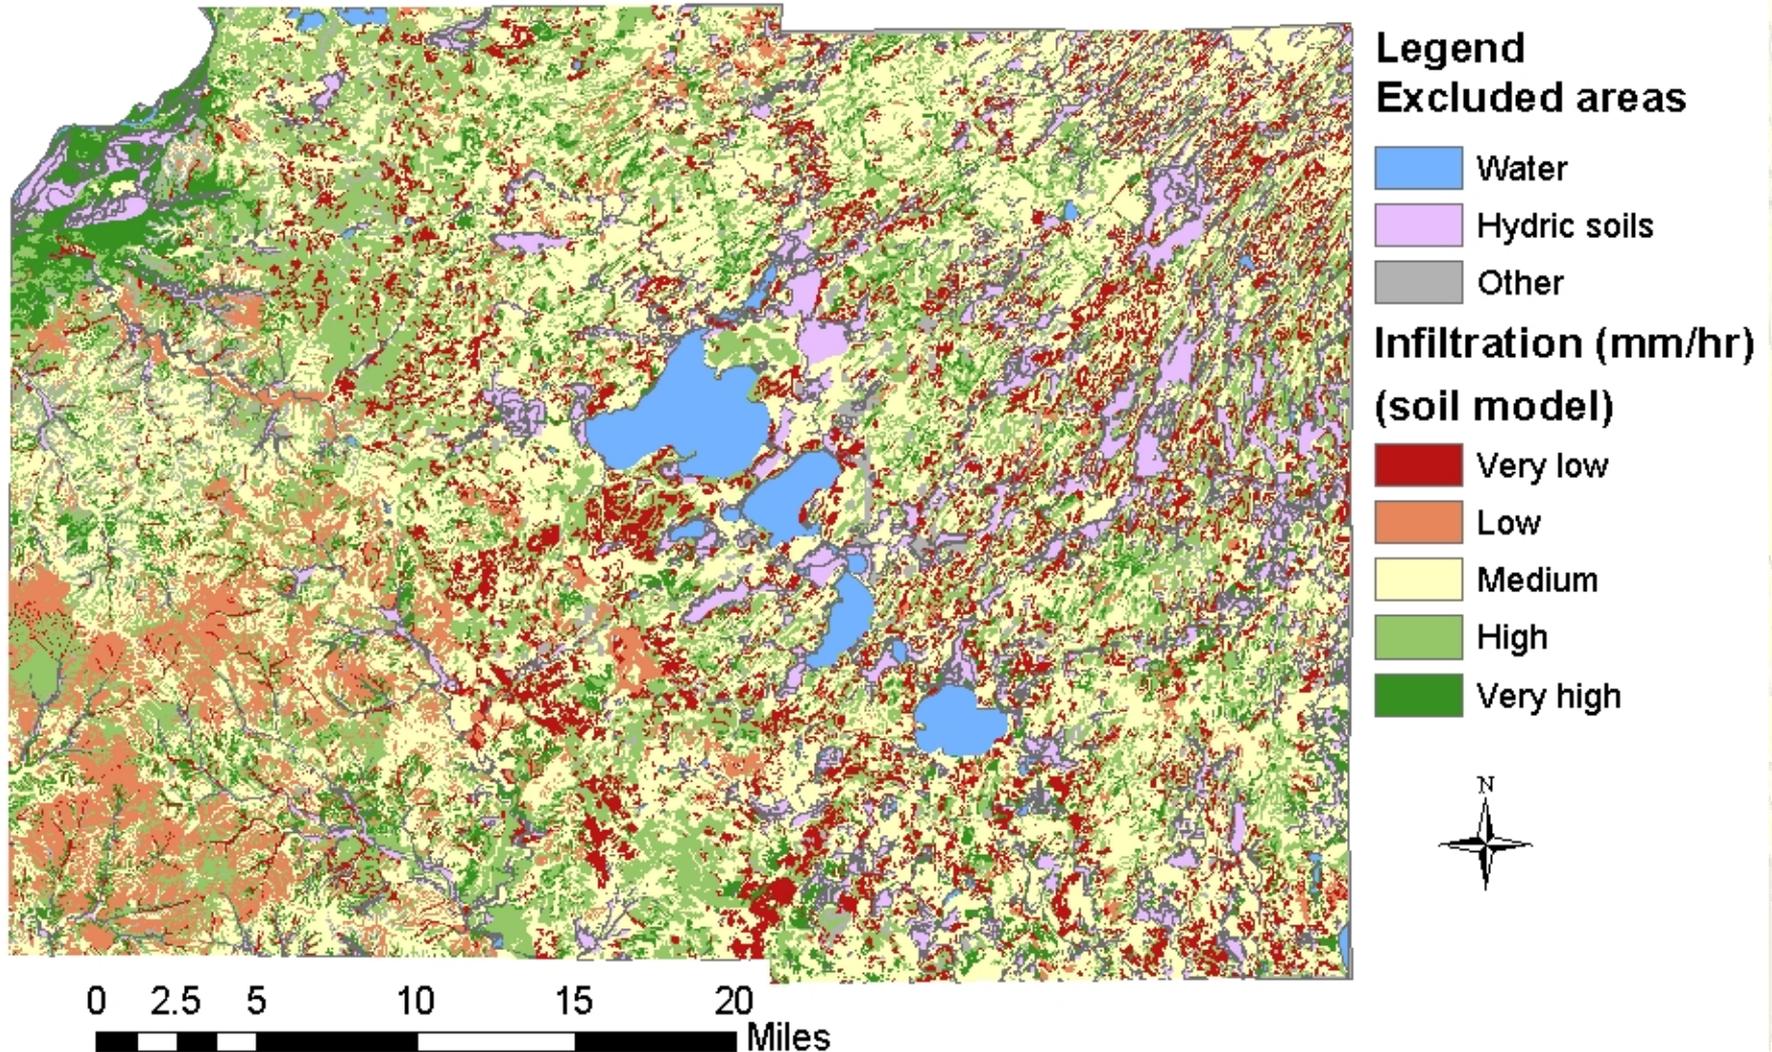


Predicted infiltration: soil and landcover model

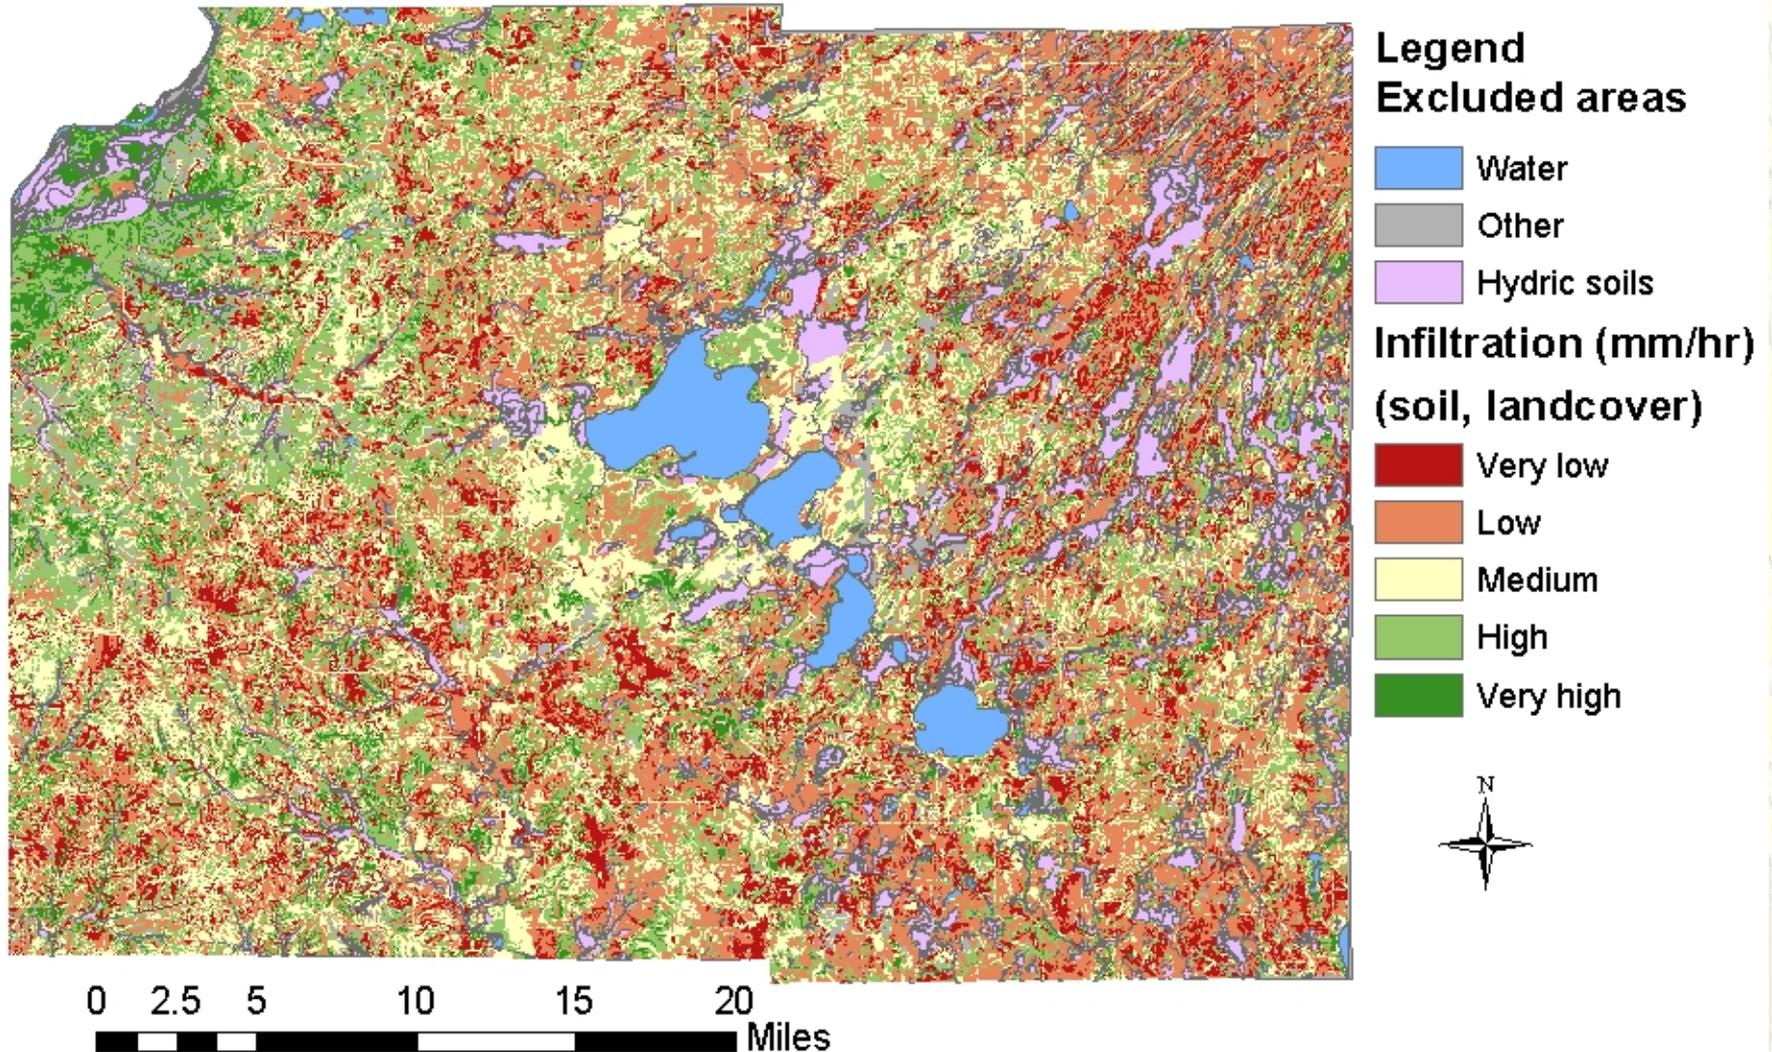

Percent of county area

Infiltration Category	Model	
	Soils only	Soils and landcover
Very low	14	14
Low	9	32
Medium	45	24
High	27	24
Very high	7	5

Predicted infiltration: Soil Survey estimate

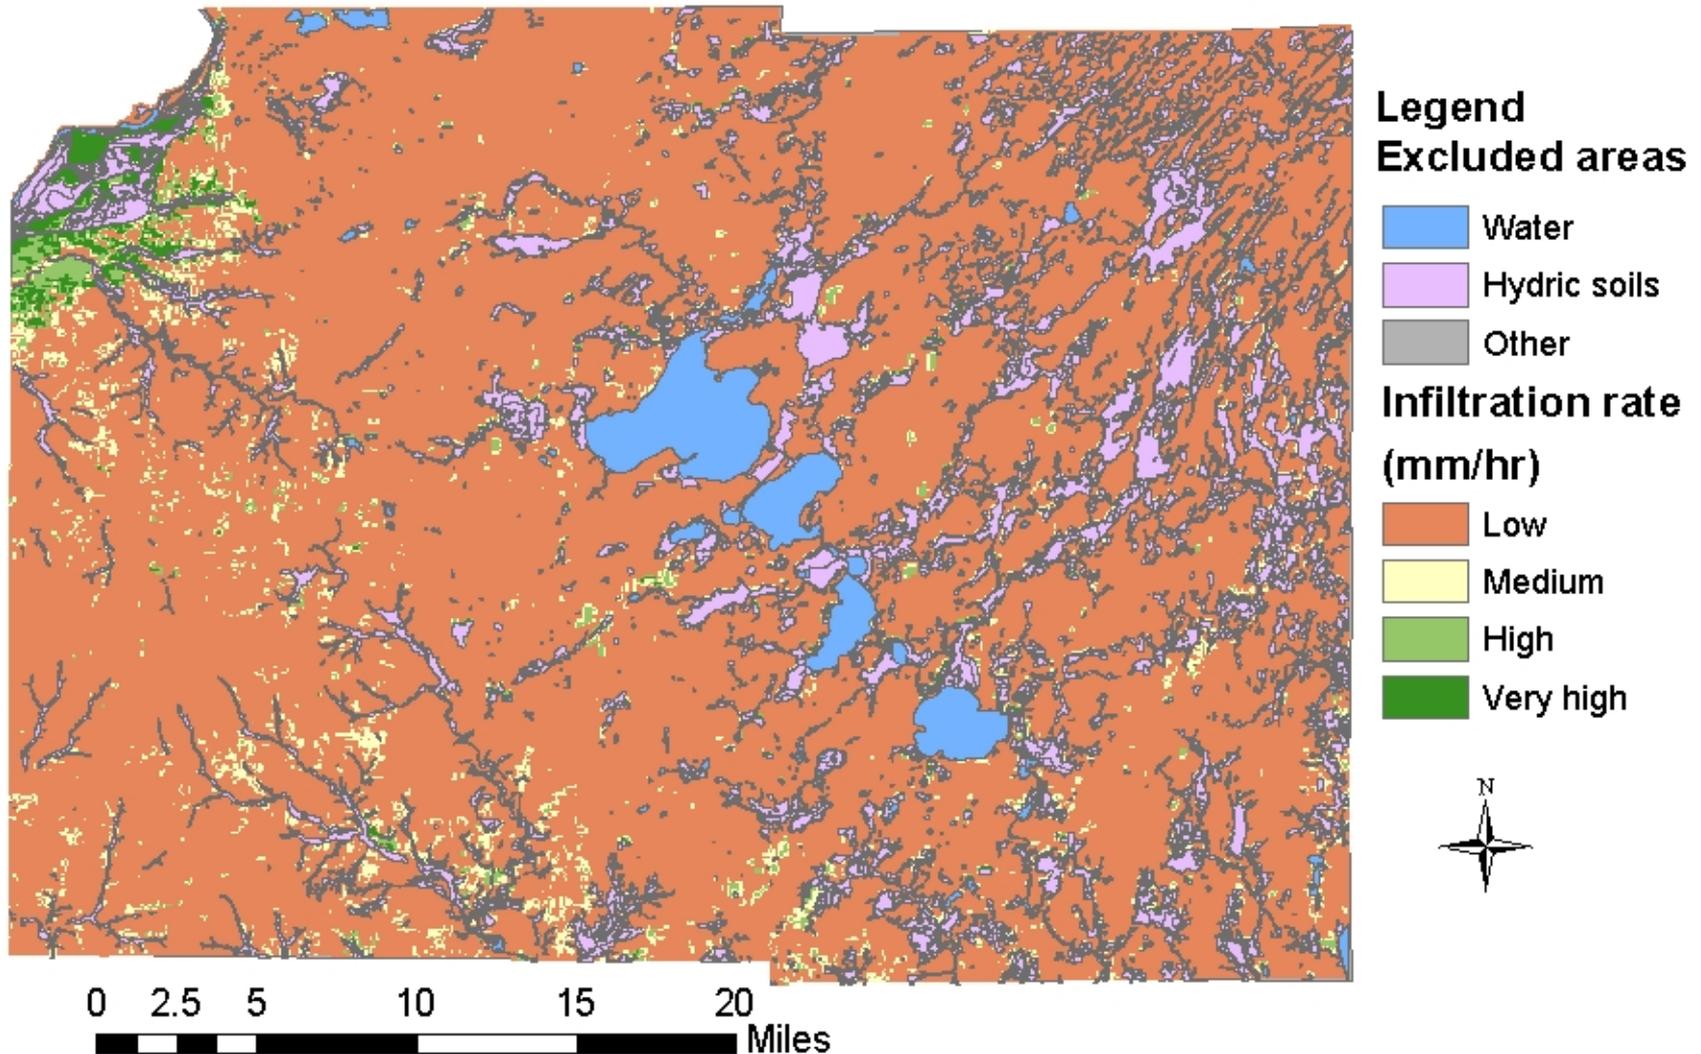

Map comparison

- Maps developed from PTFs have greater spatial detail and lower prediction error than Soil Survey K_{sat} estimates
- Soil/landcover map has greater spatial detail and slightly lower prediction error than soil property map

Potential uses

- Maps suitable for township or watershed-based planning – e.g., identify areas of towns important for recharge
- Limited utility at finer scales due to significant prediction error, but can raise awareness of site considerations
- Stormwater management practice siting and design still require site-specific measurements

Conclusions


- Infiltration measurements are consistent with PALMS, higher than other estimates
- Local PTFs have significant prediction error, but lower than other K_{sat} estimates
- Landcover slightly improves K_{sat} predictions and increases spatial resolution of predictive maps
- Relative infiltration maps suitable for township or watershed-scale planning

Questions?

Steve Ventura

(608)262-6416

sventura@wisc.edu

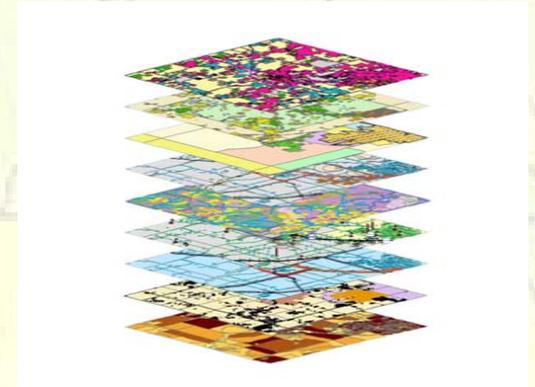

COLLEGE OF
AGRICULTURAL & LIFE SCIENCES
University of Wisconsin-Madison

Acknowledgements:

- Committee members: Steve Ventura, John Norman, Nick Balster, Ken Potter, Anita Thompson, and Cindy Stiles
- Field/lab assistants: Terri Emond, Sam Eldred, Samuel Freitag
- Training: Brian Lepore, Ana Wells, Marie Johnston
- Statistics consulting: Jun Zhu
- Extra field help: Nina Trautmann, Becky Carvin, Jeremiah Yahn
- Mapping feedback: Jeremy Balousek, Michelle Richardson, Kevin Connors, Josh Harder, Mike Kakuska, Dave Hart
- Child care: Tom, Tommy and Robyn Maher, Joanne Cahill, Brett Czerwonka, Page Pisapia