


**WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
TIMBER SALE
TRACT 6-26 WATERMELON CRAWL
T39N R7E SECTIONS 22, 27 & 34
HARVEST ACRES - 95**

Legend

-  Section Corner
-  Gate
-  Aspen Saplings
-  Red Line
-  Blue Line
-  Woods Roads
-  Snowmobile Trails
-  Highways and Town Roads
-  Grass Opening
-  Lowland Area
-  Swamp Conifer Area
-  Oak Wilt Restriction Area
-  Lakes

-  Aspen Area (80 Acres): Cut all trees > 2" except do not cut any spruce, red oak > 15" diameter, red and white pine > 20" diameter.
-  Aspen/Oak Area (15 Acres): Cut all aspen, birch, maple and oak. Do not cut any pine or purple marked trees. Cut all 1-5" aspen and maple stems.

Note: SEASONAL RESTRICTION: In the shaded portion all harvesting activity, including road building, is allowed July 16 - April 14. All operations in the shaded portion are only allowed from 6 a.m. - 6 p.m.

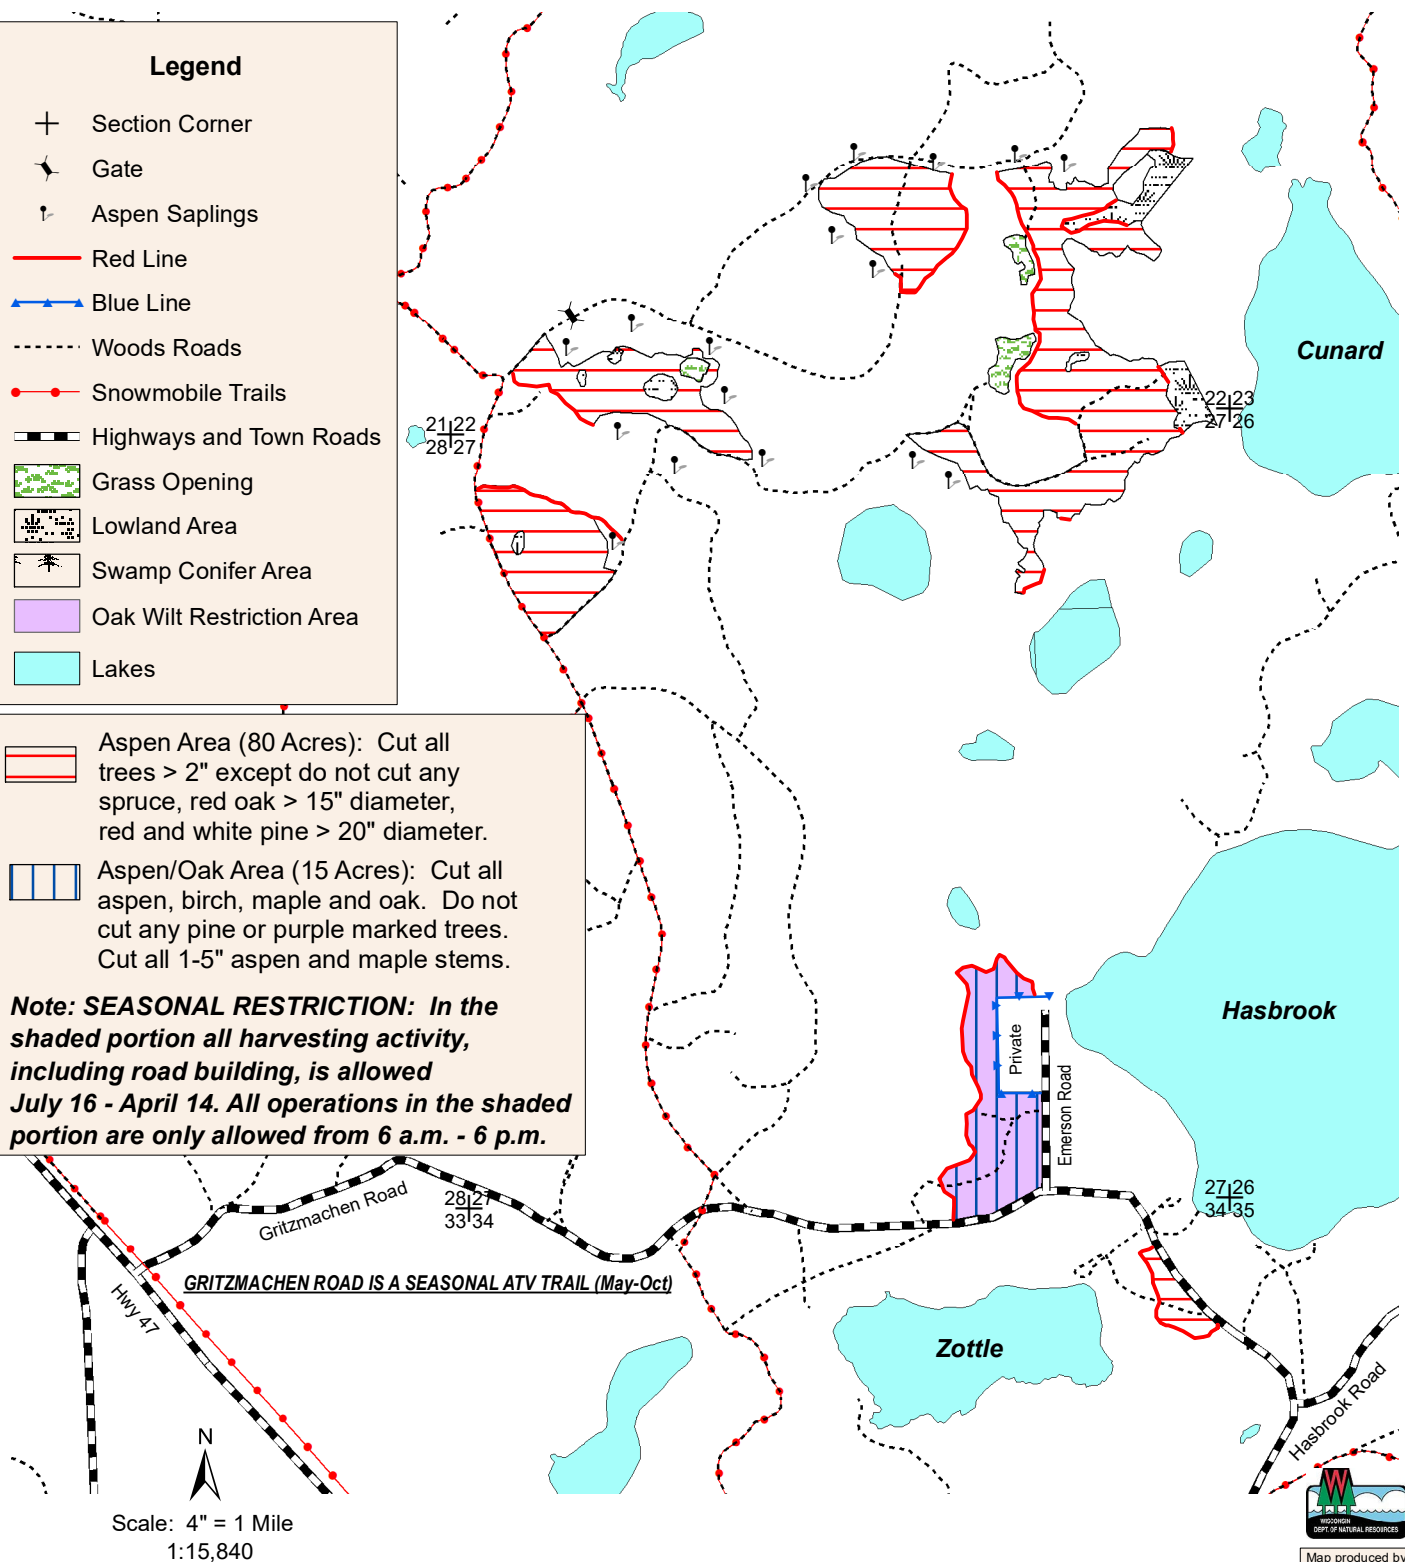

Map produced by
Jim Wetterau, 7/26

This map is for informational purposes only and may not have been prepared for or be suitable for legal, engineering or surveying purposes. The user is solely responsible for verifying the accuracy of information before using for any purpose. By using this product for any purpose user agrees to be bound by all disclaimers found here: <https://dnr.wisconsin.gov/legal>.

NH-ALSF TRACT 6-26
Watermelon Crawl

The cutting area is approximately 95 acres.

All trees that will yield one or more 100-inch sticks to a minimum 4" top diameter will be cut and utilized. Whole tree harvesting is **not** allowed.

ESTIMATED VOLUME (TONS)
MINIMUM TOP DIAMETER

<u>SPECIES</u>	<u>4"</u>
Balsam Fir ¹	175
Aspen	6795
Red Oak ²	1090
Mx. Hardwood ³	1435

Total Minimum Bid Value \$ 123,543.00

¹Volume includes 71% balsam fir, 22% white pine and 7% red pine.

²Volume includes 39 MBF of potential red oak sawlogs.

³Volume includes 50% red maple, 30% white birch, 19.5% sugar maple and .5% ironwood. Volume includes the potential for the following sawlogs: 14 MBF white birch, 7 MBF red maple and 4 MBF sugar maple.

The total sale volume equates to approximately 98.91 tons/acre or 42.70 cords/acre.

Administering Forester – Jim Wetterau (715)-892-0118 – james.wetterau@wisconsin.gov

Special Conditions:

1. **SEASONAL RESTRICTIONS:** In the shaded portion depicted on the map (Aspen/Oak Area), all logging operations, including road building, are allowed July 16 – April 14. Hours of operation in this area are allowed from 6 a.m. – 6 p.m.
2. Cutting must be concurrent for all species harvested. Do not cut any red, blue or purple marked trees.
3. Leave all dead trees and obvious den trees standing unless they create a hazard to harvesting operations. If cut, leave snags where they fall.
4. Decking wood within a designated wildlife opening is to be avoided where possible. If a designated wildlife opening is used for decking wood, all bark and debris are to be removed, and original topsoil must be returned within the opening.
5. No tops or slash allowed across any blue line, red line, town road right-of-way, grass opening or within any wetland. All slash within 50 feet of the blue paint line, town roads and snowmobile trail must be lopped and scattered within 2 feet of the ground and pulled back into the sale area at least 10 feet from the edges of those areas.
6. All woods roads and snowmobile trails must be repaired to pre-harvest conditions upon sale completion or before removal of equipment from the sale area. All landings and any new woods roads must be approved prior to sale start-up. All pine products cut between April 1 and September 1 must be removed from the sale area within three weeks from time of cutting. Pine products cut during the remainder of the year must be removed prior to April 1 of each year.
7. If the contract is to be worked on during multiple time periods a mid-contract "pull-off" inspection meeting will be required. One-week notice shall be given by the contractor prior to moving equipment off-site. During the "pull-off" inspection, provisions needing attention will be documented. The contractor at that time can decide to remedy them before pulling equipment off or rectify them when moving back onto the site. If the latter is chosen, documented items shall be addressed before harvesting can continue.

State of Wisconsin
Department of Natural Resources
dnr.wi.gov

Timber Sale Bid

Form 2400-049 (R 07/22)

Notice: Completion of this form is mandatory. The Department will not recognize your bid unless you complete and submit this form. Personal information collected will be used for program administration and may be provided to requesters as required by Wisconsin's Public Records law [ss. 19.31-19.39, Wis. Stats.].

Date

Bidder Name

Street Address

City

State

ZIP Code

Property Name (if any)

Northern Highland-American Legion

Timber Sale Name

Watermelon Crawl

Tract Number

06-26

Date and Hour of Bid Opening

November 4, 2026 1:30 PM Boulder Junction Community Center

Minimum Acceptable Bid (optional)

\$123,543.00

Species-All bids including Lump Sum bids must be by species	Utilization Specifications (4 inch/Whole Tree/Logs)	Estimated Volume	Volume Units (tons/cords/mbf)	Price Bid Per Unit	Total Bid Value on Estimated Volume
Balsam Fir	4 inch	175	tons		
Aspen	4 inch	6,795	tons		
Oak	4 inch	1,090	tons		
Mixed Hardwood	4 inch	1,435	tons		

The award shall be based on this TOTAL BID AMOUNT:

Performance Bond

Will be in the form of: (select one)

☐ Personal Check

☐ Assurance Bond

☐ Certified Check/Money Order

☐ Certificate of Deposit

☐ Irrevocable Letter of Credit

☐ Assignment of Savings Account

I understand that any or all bids may be rejected and that consideration and awarding of a contract will be based upon my past performance and ability to complete contracts. **I also understand that if I am the winning bidder, I have 6 weeks from the date of the bid opening to submit an acceptable performance bond. I also understand that if I am awarded the contract and fail to execute it or work under it, I will be required to forfeit to the Department an amount equal to 10% of my total bid amount.** Failure to forfeit the 10% penalty will result in being considered ineligible to bid on any state timber sales for a two-year duration. In the event the highest bidder can not or will not sign the contract, the award may be made to the next highest qualified bid.

☐ By checking this box, I certify that I hold a Wisconsin Master Logger Certification.

Notice: I understand:

Utilization specifications and estimated volumes are listed in the prospectus which is available upon request from the Department.

A copy of the standard timber sales contract which must be entered into is available upon request from the Department.

Signature of Bidder

Bidder's Name (Please Print or Type)

Phone Number (include area code)

Email Address