


**WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
TIMBER SALE
TRACT 990-26 SHIVER ME TIMBERS
T36N R7E SECTIONS 7, 8, 17, 18
HARVEST ACRES - 73
SALE ACRES - 80**



Notes: *Harvesting allowed July 16 - April 14

***Musson Rd may be used for hauling only, no decking.**

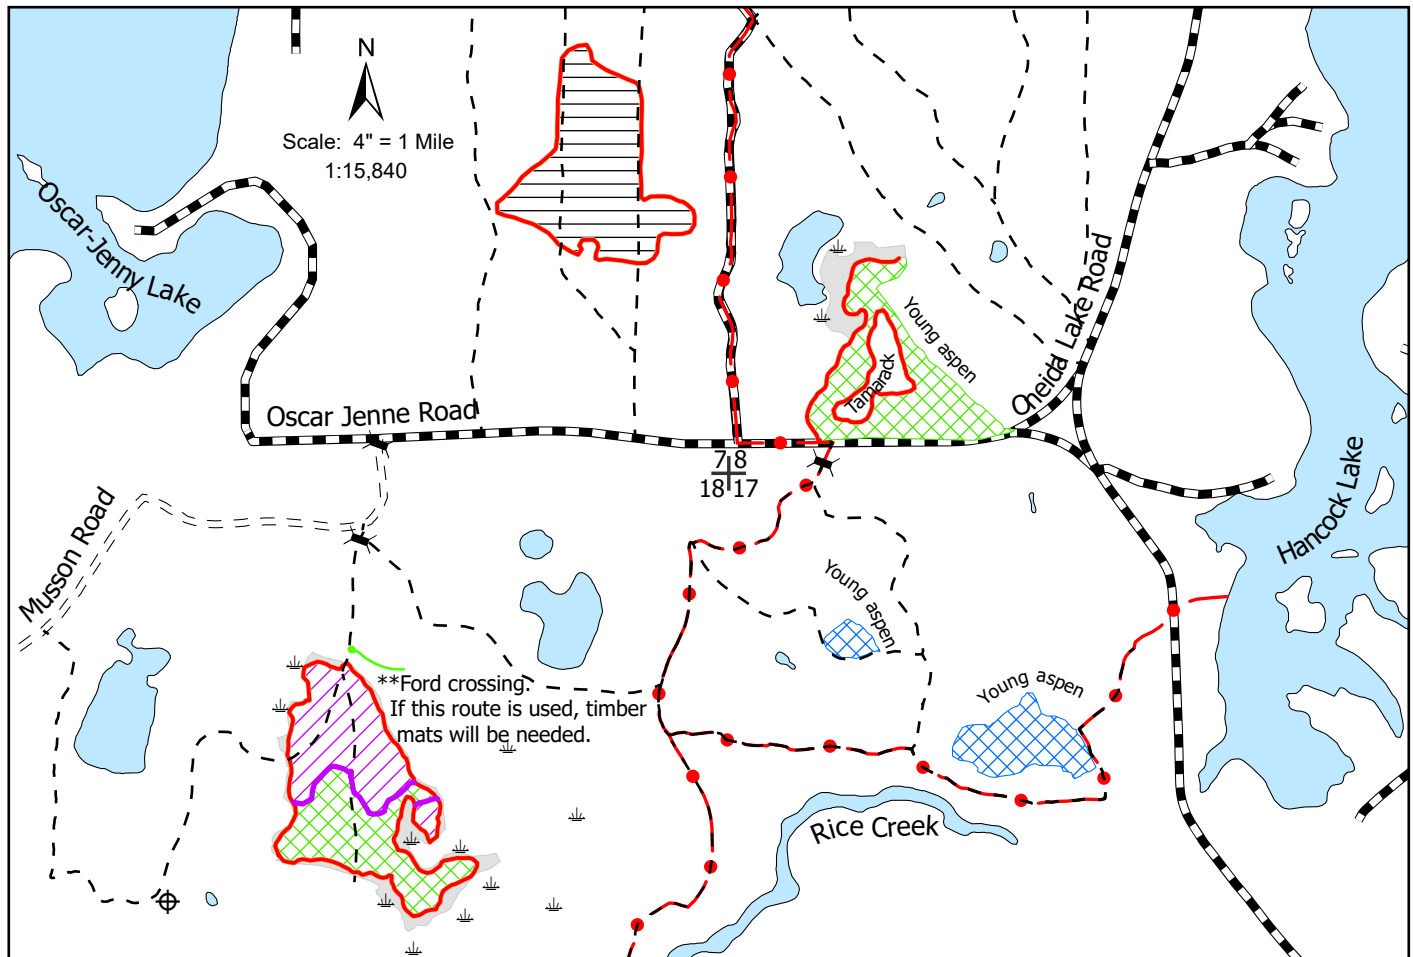

Legend

- Red Line
- Purple Line
- - - Trails
- Town/County Roads
- Forest Roads
- Snowmobile/ATV Trails
- ⊕ Section Corners
- ⊗ Survey Marker
- ⬇ Keg/Swamp
- Lakes/Rivers
- GTRRMZ
- ⚡ Gates

- White Pine Seed tree (14 acres): Cut all trees 1" DBH and greater, EXCEPT for trees marked with green paint and birch 6" DBH or smaller.
- Aspen Coppice (35 acres): Cut all trees 1" DBH and greater EXCEPT white pine, red pine, jack pine, and hemlock.
- Red Pine 1st Thinning (9 acres): Cut all merchantable aspen, red maple, balsam, spruce, and all trees marked with orange paint.
- White Pine Thinning (22 acres): Cut all merchantable aspen, red maple, balsam, ironwood, and all trees marked with orange paint.

This map is for informational purposes only and may not have been prepared for or be suitable for legal, engineering or surveying purposes. The user is solely responsible for verifying the accuracy of information before using for any purpose. By using this product for any purpose user agrees to be bound by all disclaimers found here: <https://dnr.wisconsin.gov/legal>.

Woodboro Lakes Wildlife Area TRACT 990-26

Shiver Me Timbers

The sale area is approximately 80 acres.

The cutting area is approximately 73 acres.

All trees that will yield one or more 100-inch sticks to a minimum top diameter of 4" will be cut and utilized.

Whole tree harvest not allowed.

ESTIMATED VOLUME (TONS)

MINIMUM TOP DIAMETER

<u>SPECIES</u>	<u>4"</u>
White Pine ¹	360
Red Pine ²	340
Balsam Fir ³	130
Aspen	1750
Oak	240
Mixed Hardwood ⁴	1350

Total Minimum Bid Value: \$48,993.00

¹ Volume includes an estimated 20 MBF of white pine.

² Volume includes an estimated 20 MBF of red pine.

³ Balsam fir includes approximately 84% balsam and 16% spruce.

⁴ Mixed hardwood includes approximately 65% red maple, 30% birch, and 5% sugar maple.

The total sale volume equates to approximately 57 tons/acre or 25 cords/acre.

Special Conditions:

1. Harvesting allowed July 16 – April 14 due to Oak Wilt.
2. All pine products cut between April 1st through September 1st, must be removed by the contractor within 21 days of cutting. Pine products cut during the remainder of the year must be removed prior to April 1st of each year.
3. If harvesting occurs while the ATV or snowmobile trail is open, signs must be placed at both ends of the harvest area to notify users of the active timber harvest. The ATV trail must be kept clear of debris, and the snowmobile trail must be kept snow covered and clear of debris if harvesting while trail is open.
4. Do not cut any snags unless they pose a safety hazard.
5. No slash allowed across any blue line, red line, powerline, or within any wetland. Slash must be lopped and scattered to lay within 2 feet of the ground and pulled back into the sale area at least 10 feet away from the adjacent private lands, snowmobile trails, and town/county roads.
6. All landings and any new woods roads must be approved prior to sale start up.
7. Musson Road may be used for hauling only, no decking will be allowed along this road.
8. If the contract is to be worked on during multiple time periods, a mid-contract "pull-off" inspection meeting will be required. One week notice shall be given by the contractor prior to moving equipment off site. During the "pull-off" inspection, provisions needing attention will be documented. The contractor at that time can decide to remedy them before pulling equipment off or rectify them when moving back onto the site. If the latter is chosen, documented items shall be addressed before harvesting can continue.
9. Woods roads, trails and landings must be left in equal or better condition than pre-harvest upon completion of the final sale closeout inspection.
10. If ford crossing is utilized, it must be left in equal or better condition than pre-harvest upon completion of the final sale closeout inspection.

State of Wisconsin
Department of Natural Resources
dnr.wi.gov

Timber Sale Bid

Form 2400-049 (R 07/22)

Notice: Completion of this form is mandatory. The Department will not recognize your bid unless you complete and submit this form. Personal information collected will be used for program administration and may be provided to requesters as required by Wisconsin's Public Records law [ss. 19.31-19.39, Wis. Stats.].

Date

Bidder Name

Street Address

City

State

ZIP Code

Property Name (if any)

Woodboro Lakes Wildlife Area

Timber Sale Name

Shiver Me Timbers

Tract Number

990-26

Date and Hour of Bid Opening

November 4, 2026 1:30 PM Boulder Junction Community Center

Minimum Acceptable Bid (optional)

\$48,993.00

Species-All bids including Lump Sum bids must be by species	Utilization Specifications (4 inch/Whole Tree/Logs)	Estimated Volume	Volume Units (tons/cords/mbf)	Price Bid Per Unit	Total Bid Value on Estimated Volume
White Pine	4 inch	360	tons		
Red Pine	4 inch	340	tons		
Balsam Fir	4 inch	130	tons		
Aspen	4 inch	1,750	tons		
Oak	4 inch	240	tons		
Mixed Hardwood	4 inch	1,350	tons		

The award shall be based on this TOTAL BID AMOUNT:

Performance Bond

Will be in the form of: (select one)

☐ Personal Check

☐ Assurance Bond

☐ Certified Check/Money Order

☐ Certificate of Deposit

☐ Irrevocable Letter of Credit

☐ Assignment of Savings Account

I understand that any or all bids may be rejected and that consideration and awarding of a contract will be based upon my past performance and ability to complete contracts. **I also understand that if I am the winning bidder, I have 6 weeks from the date of the bid opening to submit an acceptable performance bond. I also understand that if I am awarded the contract and fail to execute it or work under it, I will be required to forfeit to the Department an amount equal to 10% of my total bid amount.** Failure to forfeit the 10% penalty will result in being considered ineligible to bid on any state timber sales for a two-year duration. In the event the highest bidder can not or will not sign the contract, the award may be made to the next highest qualified bid.

☐ By checking this box, I certify that I hold a Wisconsin Master Logger Certification.

Notice: I understand:

Utilization specifications and estimated volumes are listed in the prospectus which is available upon request from the Department.

A copy of the standard timber sales contract which must be entered into is available upon request from the Department.

Signature of Bidder

Bidder's Name (Please Print or Type)

Phone Number (include area code)

Email Address