

NH-ALSF TRACT 8-18

Sparrow Road Oak

Oneida County

Town 38 North, Range 7 East:

Section 7 – SESE

Section 18 – N1/2NE, NENW, SWNW

No bid bond required.

15% of the total sale bid value or \$1,000.00, whichever is greater, will be required for performance bond.

The cutting area is approximately 64 acres.

The contract period is 3 years.

All trees that will yield one or more 100-inch sticks to a minimum top diameter of 4” will be cut and utilized.

Whole tree harvest is not allowed.

ESTIMATED VOLUME (TONS)
MINIMUM TOP DIAMETER

<u>SPECIES</u>	<u>4”</u>	<u>Advertised Price</u> <u>Per Unit</u>
Red Pine ¹	130	\$ 21.60
Red Oak ²	2,550	\$ 23.50
Mx. Hardwood ³	120	\$ 15.20
Total Minimum Bid Value		\$ 64,557.00

¹ Volume includes 73% red pine, 19% white pine, and 8% balsam fir. (Wt. conv. 2.212 tons/cord)

² Volume includes 214 MBF of potential red oak logs.


³ Volume includes 46% hard maple, 37% red maple, 16% white birch, and 1% misc. (Wt. conv. 2.422)

The total sale volume equates to approximately 43.75 tons/acre or 16.18 cords/acre.

Special Conditions








1. Do not cut any trees within 15 feet of any ephemeral pond. All other low areas are to be operated in during dry or frozen ground conditions to prevent rutting. Cutting must be concurrent for all species to be harvested.
2. All slash must be pulled back at least ten feet away from Bird Lake Road. Sparrow Road must be kept free of debris and left in good condition for vehicle traffic at all times.
3. No slash allowed across any blue line, red line, powerline, or within any wetland. Slash must be lopped and scattered to lay within 2 feet of the ground and pulled back into the sale area at least 10 feet away from the adjacent private lands and public roads.
4. All landings and any new woods roads must be approved prior to sale start up.
5. All pine products cut between May 1st and September 1st must be removed from the sale area within three weeks from the time of cutting. Pine products cut during the remainder of the year must be removed prior to May 1st of each year.
6. No Logging Activity allowed in the Marked Oak Area or Oak Shelterwood Area from April 15th – July 15th due to the risk of Oak Wilt.
7. If the contract is to be worked on during multiple time periods a mid-contract “pull-off” inspection meeting will be required. One-week notice shall be given by the contractor prior to moving equipment off site. During the “pull-off” inspection, provisions needing attention will be documented. The contractor at that time can decide to remedy them before pulling equipment off or rectify them when moving back onto the site. If the latter is chosen, documented items shall be addressed before harvesting can continue.

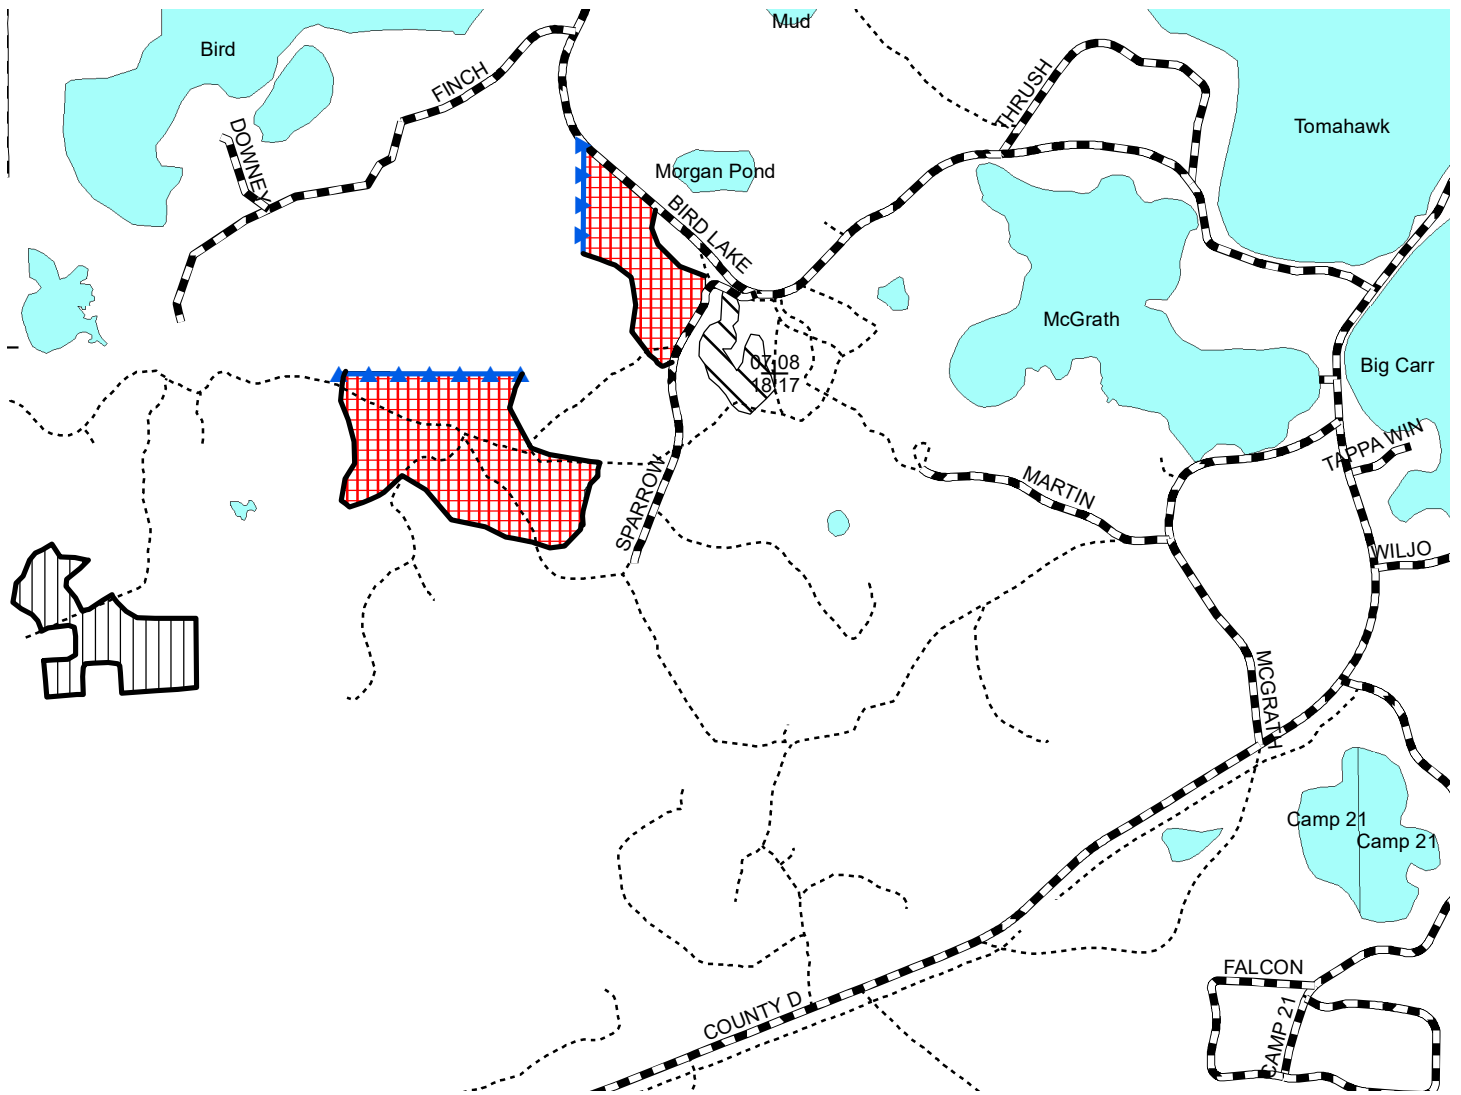


**WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
TIMBER SALE
TRACT 8-18 SPARROW ROAD OAK
T38N R7E SECTION 7, 18
HARVEST ACRES - 64**



All stands are within Mgmt. Area 6:
Oneida Sandy Plains -
Forest Production Area


Legend

-  Section Corner
-  Red Line
-  Blue Line
-  Powerline
-  Snowmobile Trails
-  Highways and Town Roads
-  Woods Roads

-  Oak Shelterwood Area (45 Acres): Cut all oak, maple, and ironwood 2" and greater in diameter NOT marked with green paint. Cut all trees marked with orange paint.
-  Marked Oak Area (14 Acres): Cut all 1 inch and larger maple, fir, ironwood, and trees marked with orange paint.
-  Pine Area (5 Acres): Cut all trees marked with orange paint.

Note: No harvesting or skidding in the Oak Shelterwood or Marked Oak Area from April 15 to July 15 due to the risk of Oak Wilt

N
Scale: 4" = 1 Mile
1:15,840



Map produced by
Jon Leith, 11/17

This map is not a survey of the actual boundary of any property this map depicts.