POWELL MARSH WILDIFE AREA TRACT NO. 977-18
Powell Marsh Aspen

Vilas County
Town 42 North, Range 5 East
   Section 21   SESW, SWSE
   Section 29   SWNW
   Section 30   SENE

No bid bond will be required.
15% of the total sale bid value or $1000.00, whichever is greater, will be required for performance bond.
The cutting area is approximately 21 acres.
The contract period is 2 years.
All trees that will yield one or more 100-inch sticks to the minimum 4" top diameter will be cut and utilized.

ESTIMATED VOLUME (**TONS**)
MINIMUM TOP DIAMETER

SPECIES	4"		Advertised Price Per Unit
White Pine[1]	130		$ 12.80
Aspen	700		$ 11.00
Mixed Hardwoods[2]	160		$ 10.20

Total Minimum Bid Value $ 10,996.00

PW[1] -- Approximately 44% (57 tons) White Pine , 39% (51 tons) Red Pine, 11% (14 tons) Tamarack, 4% (5 tons) Black Spruce, 2% (3 tons) Balsam Fir. (weight conversion factor = 2.176 tons/cd)

MX[2] -- Approximately 59% (94 tons) Soft Maple, 41% (66 tons) White Birch. (weight conversion factor = 2.325 tons/cd)
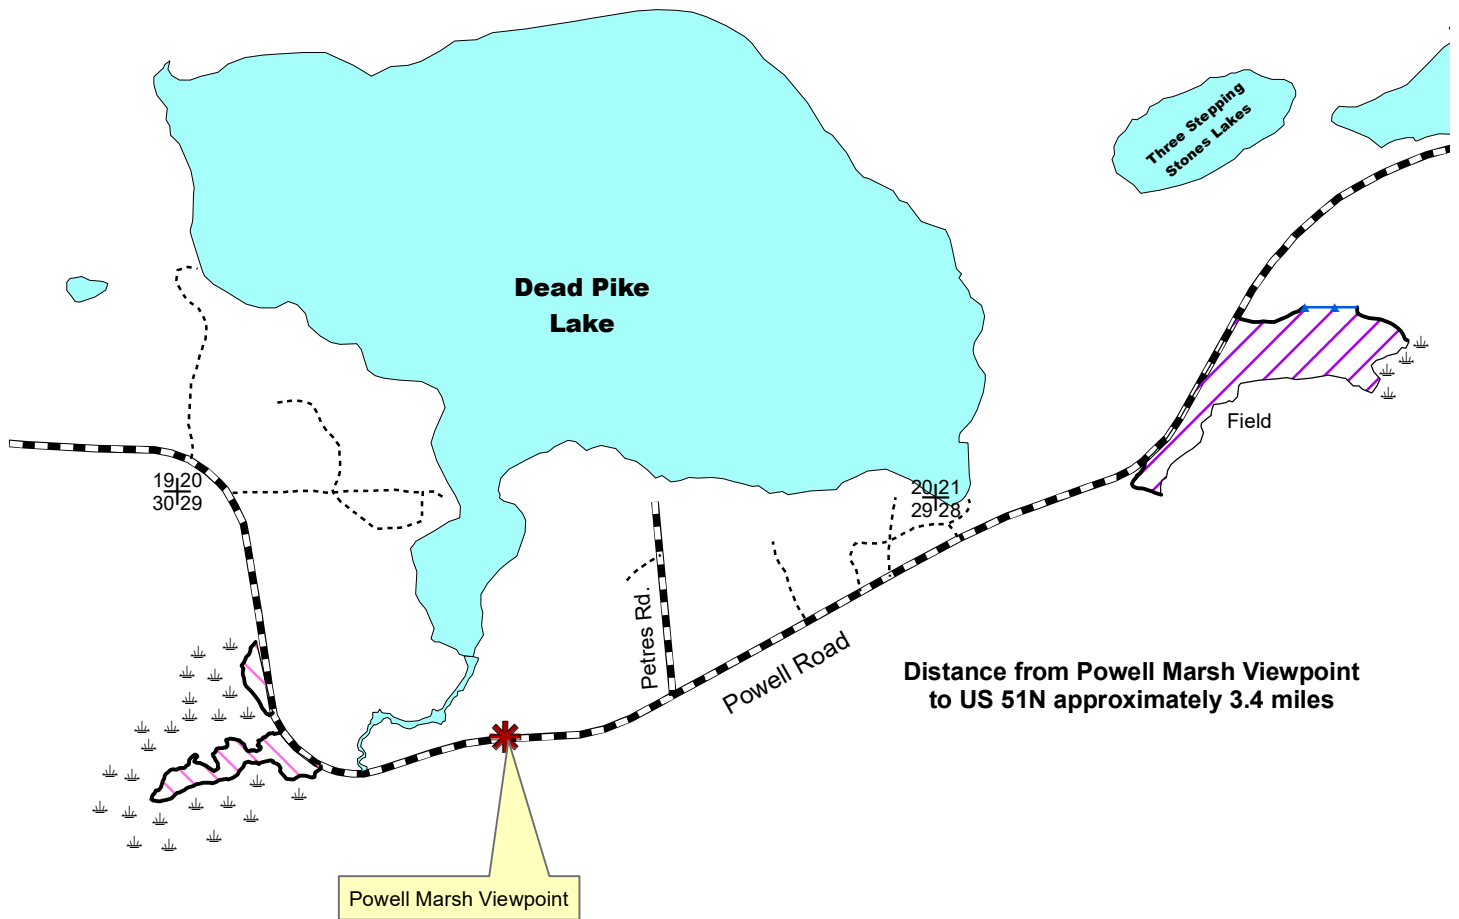
Note sale volume equates to 47 tons/acre or 21 cords/acre. Volumes above reflect utilization to 4" top.

Special Conditions:
1. Seasonal Restrictions: Frozen ground conditions only.
2. Cutting must be concurrent for all species to be harvested.
3. All pine products cut between May 1 and September 1 must be removed from the sale area within three weeks from time of cutting. Pine products cut during the remainder of the year must be removed prior to May 1 of each year.
4. Equipment Restrictions: Skidding of forest product materials will be restricted to shortwood skidders only.
5. Contractor is required to level and crown any hunter/hiking trails used as for hauling or skidding.
6. Decking of wood will not be permitted along Powell road.
7. No tops or slash allowed across any blue line, red line or within any wetland. All slash must be lopped and or scattered to within two feet of the ground and pulled back into the sale area at least 10 feet away from private lands and public roads.
8. Felling and skidding damage to residual trees must be avoided.

N

WISCONSIN
DEPARTMENT OF NATURAL RESOURCES
TIMBER SALE
TRACT 977-18 POWELL MARSH ASPEN
T42N R5E SECTIONS 21, 29 & 30
HARVEST ACRES - 21

Three Stepping Stones Lakes

Dead Pike Lake

Field

19 20
30 29

20 21
29 28

Petres Rd.

Powell Road

Distance from Powell Marsh Viewpoint to US 51N approximately 3.4 miles

Powell Marsh Viewpoint

Harvesting Operations is limited to frozen ground conditions only

Aspen Regeneration Area East (16 Acres): Cut all aspen, birch, maple, balsam fir, black spruce and trees marked with orange paint. Cut all 1-5 inch stem except for oak and pine.

Aspen Regneration Area West (5 Acres): Cut all aspen, birch, maple, balsam fir and trees marked with orange paint. Cut all 1-5 inch stems except oak and pine.

Note: Do NOT cut trees marked with green paint.

Scale: 4" = 1 Mile
1:15,840

Legend
※ Powell Marsh Viewpoint
+ Section Corner
Keg/Swamp
- - - - Woods Roads
Blue Paint Line
Red Paint Line
Lakes & Open Water
Highways and Town Roads

WISCONSIN
DEPT. OF NATURAL RESOURCES

Map produced by
Paul Stearns, 01/29/18

This map is not a survey
of the actual boundary
of any property this maps depicts