


**WISCONSIN  
DEPARTMENT OF NATURAL RESOURCES  
TIMBER SALE MAP  
TRACT 026-20W IRON BRIDGE ASPEN  
T37N R5E SECTIONS 5, 6, 7, & 8  
T37N R4E SECTION 12  
HARVEST ACRES - 164**



N  
1:15,840

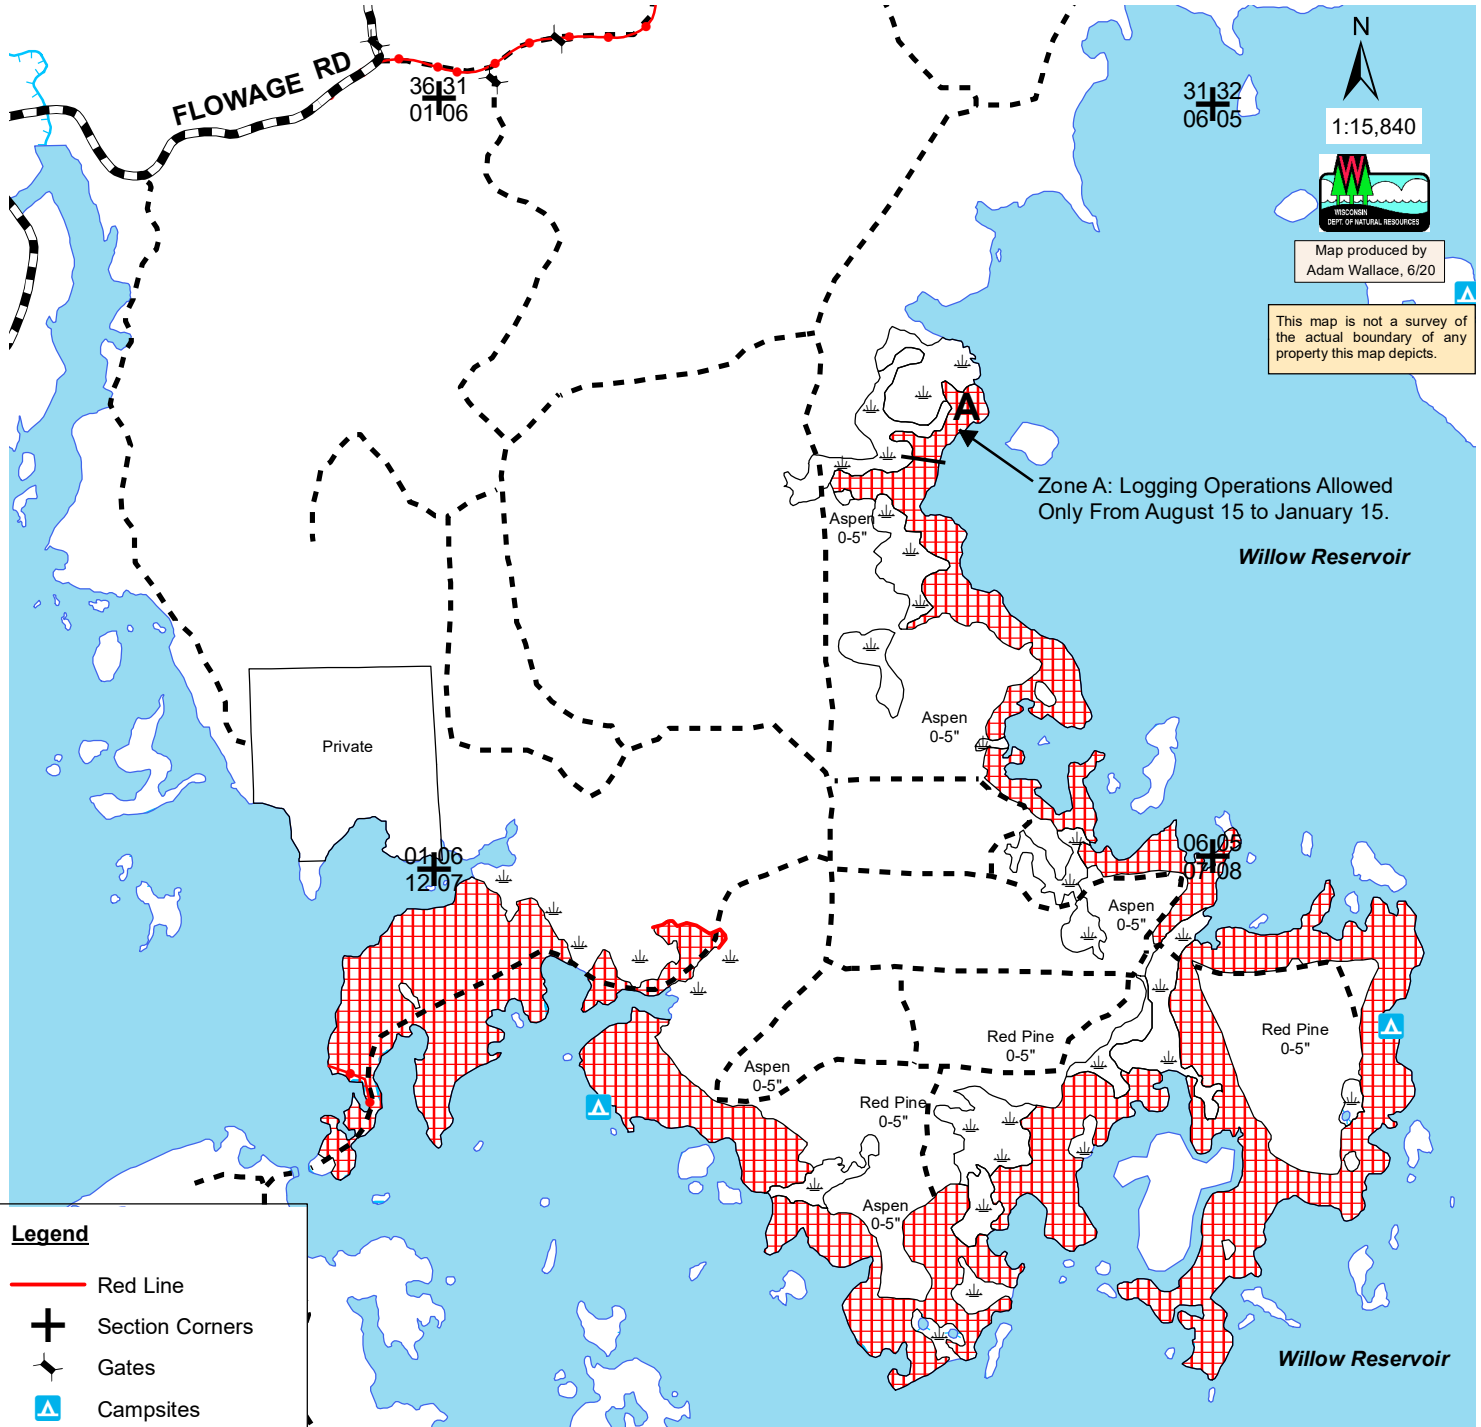

Map produced by  
Adam Wallace, 6/20

This map is not a survey of the actual boundary of any property this map depicts.

Zone A: Logging Operations Allowed  
Only From August 15 to January 15.

*Willow Reservoir*

Private

- Legend**
- Red Line
  - + Section Corners
  - ✦ Gates
  - ▲ Campsites
  - Snowmobile Trail
  - Woods Roads
  - Town/County Roads
  - Rivers/Creeks
  - Lakes
  - ⚓ Keg/Swamp

Sale Area (164 acres): Cut all trees marked with orange paint. Minimize damage to residual trees and take extra care to not damage pine saplings/poletimber.

**Note:** Sale boundaries consist of wetland edges, sapling stands, the Willow Flowage and a red paint line as shown on this map. No equipment allowed within 15' of the Flowage or within any wetlands. Use caution to NOT fall any trees into the Flowage. Sale operations within daylight hours only.

This sale is located within the Willow Forest Production Area and the Flowage Scenic Management Area.

WILLOW FLOWAGE TRACT NO. 026-20W

Iron Bridge Aspen

Oneida County

Town 37 North, Range 5 East (Little Rice Township)

Section 5 – SWSW

Section 6 – SE1/4, SWNE

Section 7 – E1/2NE, N1/2SE, NW1/4

Section 8 – NW1/4, NWSW

Town 37 North, Range 4 East (Lynne Township)

Section 12 – E1/2NE

No bid bond is required.

15% of the total sale bid value or \$1000.00, whichever is greater, will be required for performance bond.

The cutting area is approximately 164 acres.

The contract period is 3 years.

All trees that will yield one or more 100-inch sticks to a 4” top diameter will be cut and utilized.

---

ESTIMATED VOLUME (TONS)  
MINIMUM TOP DIAMETER

<u>SPECIES</u>	<u>4”</u>	<u>Whole Tree</u>
White Pine <sup>1</sup>	140	
Balsam Fir	360	
Aspen	2500	
Mixed Hardwood <sup>2</sup>	340	

**Total Minimum Bid Value: \$33,978.00**

---

<sup>1</sup> Approximately 53% white pine, 47% red pine. Includes 12 MBF white pine, 3 MBF red pine and a few jack pine trees. (Wt. conv. 2.168 tons/cord)

<sup>2</sup> Approximately 83% red maple, 17% white birch. Includes 3 MBF red maple and 2 MBF white birch. (Wt. conv. 2.295 tons/cd)

Note: Total sale volume equates to 20.2 tons/acre or 9.0 cords/acre.

Special Conditions:

1. All pine products cut between May 1 and September 1 must be removed from the sale area within three weeks from time of cutting. Pine products cut during the remainder of the year must be removed prior to May 1 of each year.
2. Cutting must be concurrent for all species.
3. Do not cut, knock down or utilize any dead trees.
4. Slash within 50 feet of all roads, trails, and the flowage must be lopped and/or scattered to lie within two feet of the ground and be pulled back 10’ behind the tree line concurrently with cutting.
5. Whole tree utilization or biomass harvesting is not allowed.
6. Follow WI BMP’s for water quality at all times. No equipment is allowed within 15 feet of the flowage. Avoid wetlands as much as possible and only operate within them during very dry times with timber matting or under frozen ground conditions.
7. The Snowmobile Trails must be kept free of debris, snow covered in winter, and left in good condition for vehicle traffic at all times.
8. Landings and logging roads used generally must be 200’ or greater from the flowage. Roads and landings must be approved by the Willow Flowage Property Manager in advance of use. A couple roads may require timber mats or frozen ground conditions. Please contact the Property Manager for further details.
9. Use caution when cutting near the two campsites shown on the sale map. Take extra care to not damage the picnic tables, latrines, fire rings, signs, etc. Sale activity is limited to daylight hours only to minimize impacts to nearby campers.
10. Logging operations within Zone A (approx. 3 acres) are allowed only from August 15 to January 15.