




**WISCONSIN  
DEPARTMENT OF NATURAL RESOURCES  
TIMBER SALE  
TRACT 26-19 DAY LAKE NORTH  
T41N R6E SECTION 1, 2  
T42N R6E SECTION 35, 36  
HARVEST ACRES - 117**

This sale is located within Management Area 3: Vilas Sandy Plains North Forest Production Area & Area 13: Special Aquatic Native Community Management Area.

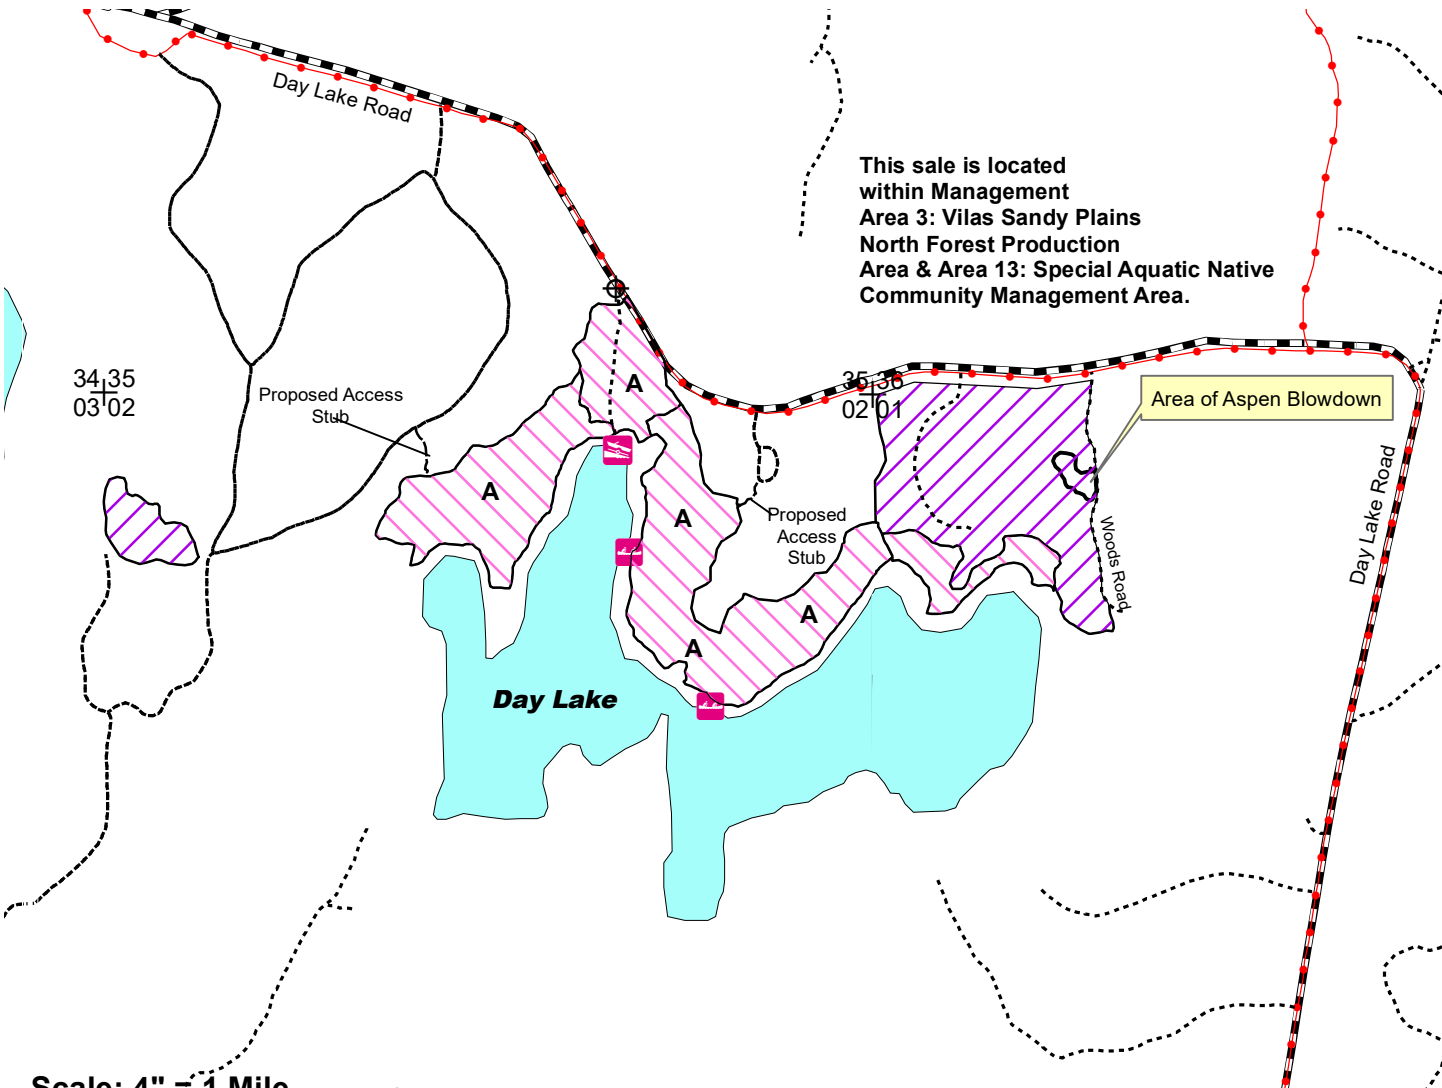

**Scale: 4" = 1 Mile  
1:15,840**

**Legend**

- Survey Marker
- Section Corner
- Day Lake Boat Landing
- Canoe Campsites
- Red Line
- Flagged Potential Access Stubs
- Woods Roads & Trails
- Snowmobile Trails
- Aspen Blowdown Area
- Highways and Townroads
- Lakes & Open Water

**Oak Wilt Restrictions: No harvesting or skidding in all areas from April 15 to July 15 due to the risk of oak wilt.**

**Zone A - All timber harvesting operations will be limited to daylight operations ONLY**

Aspen/Oak Coppice Areas (46 Acres): Cut all aspen, maple, oak, white birch, merchantable balsam fir, and orange marked trees. Cut all 1-5 inch trees except white birch and pine. Take extra care to NOT DAMAGE WHITE PINE understory.

Pine/Oak/Aspen Thinning Area (71 Acres): Cut all merchantable balsam fir and orange marked trees only. Do NOT cut 1-5 inch trees.

**Note: Do NOT cut trees marked with green paint**



Map produced by Paul Stearns, 12/19/18

This map is not a survey of the actual boundary of any property this maps depicts

NH-ALSF TRACT NO. 26-19

Day Lake North

Vilas County

Town 41 North, Range 6 East

Section 1 GL01, GL02, NENW

Section 2 GL01, GL02, GL03, NWNW

Town 42 North, Range 6 East

Section 35 SWSE,

Section 36 SWSW, SESW

No bid bond will be required.

15% of the total sale bid value or \$1000.00, whichever is greater, will be required for performance bond.

The cutting area is approximately 117 acres.

The contract period is 3 years.

All trees that will yield one or more 100-inch sticks to the minimum 4" top diameter will be cut and utilized.

Whole tree utilization is NOT allowed.

---

	<u>ESTIMATED VOLUME (TONS)</u>	
	MINIMUM TOP DIAMETER	
<u>SPECIES</u>	<u>4"</u>	Advertised Price
		<u>Per Unit</u>
Red Pine <sup>1</sup>	450	\$ 21.70
Aspen	1700	\$ 14.60
Oak <sup>2</sup>	625	\$ 23.10
Mixed Hardwoods <sup>3</sup>	260	\$ 12.60
<b>Total Minimum Bid Value</b>		<b>\$ 52,298.50</b>

---

**PR<sup>1</sup> --Approximately 57% (257 tons) Red Pine, and 43% (193 tons) White Pine. Includes approximately 44MBF Red Pine sawlogs and 22MBF of White Pine sawlogs. (Wt. conv. 2.183 tons/cord)**

**O<sup>2</sup>-- Approximately 64% (400 tons) Red Oak, and 36% (225 tons) Scrub/Pin Oak. Includes approximately 18MBF of Red Oak sawlogs. (Wt. conv. 2.750 tons/cord)**

**MX<sup>3</sup> --Approximately 52% (135 tons) White Birch, Soft Maple, 36% (94 tons) Hard Maple, 12% (31 tons). (Wt. conv. 2.370 tons/cord)**

**Note sale volume equates to 22.5 tons/acre or approximately 10 cords per acre. Volumes above reflect utilization to 4" top.**

Special Conditions:

1. Operational Restriction: Harvesting operations will be limited to a period from July 15 to April 15 due to Oak Wilt considerations. Zone A - Harvesting operations will be limited to daylight hours ONLY.
2. Cutting must be concurrent for all species to be harvested.
3. All pine products cut between May 1 and September 1 must be removed from the sale area within three weeks from time of cutting. Pine products cut during the remainder of the year must be removed prior to May 1 of each year.
4. Equipment Restrictions: Skidding of forest product materials will be restricted to shortwood forwarders only.
5. Snowmobile trails must be kept free of debris and left in good condition for vehicle traffic at all times.
6. All landings and any new roads must be approved prior to sale start up.
7. Decking of wood will not be permitted along Day Lake road.
8. Slash must be lopped and scattered to lie within two feet of the ground and pulled back at least 20 feet from the Day Lake Public Boat Landing Road. No trees shall be felled across any redline or into any wetland areas.
9. Felling and skidding damage to residual trees must be avoided. Take extra caution to NOT DAMAGE white pine understory.
10. If the contract is to be worked on during multiple time periods a mid-contract "pull-off" inspection meeting will be required. One-week notice shall be given by the contractor prior to moving equipment off-site. During the "pull-off" inspection provisions needing attention will be documented. The contractor at this time can decide to remedy them before pulling off or rectify them when moving back onto the site. If the latter is chosen documented items shall be addressed before harvesting can continue.