


**WISCONSIN  
DEPARTMENT OF NATURAL RESOURCES  
TIMBER SALE  
TRACT 029-21W WILLOW FALLS  
T37N R4E SECTIONS 13 & 14  
HARVEST ACRES - 87**

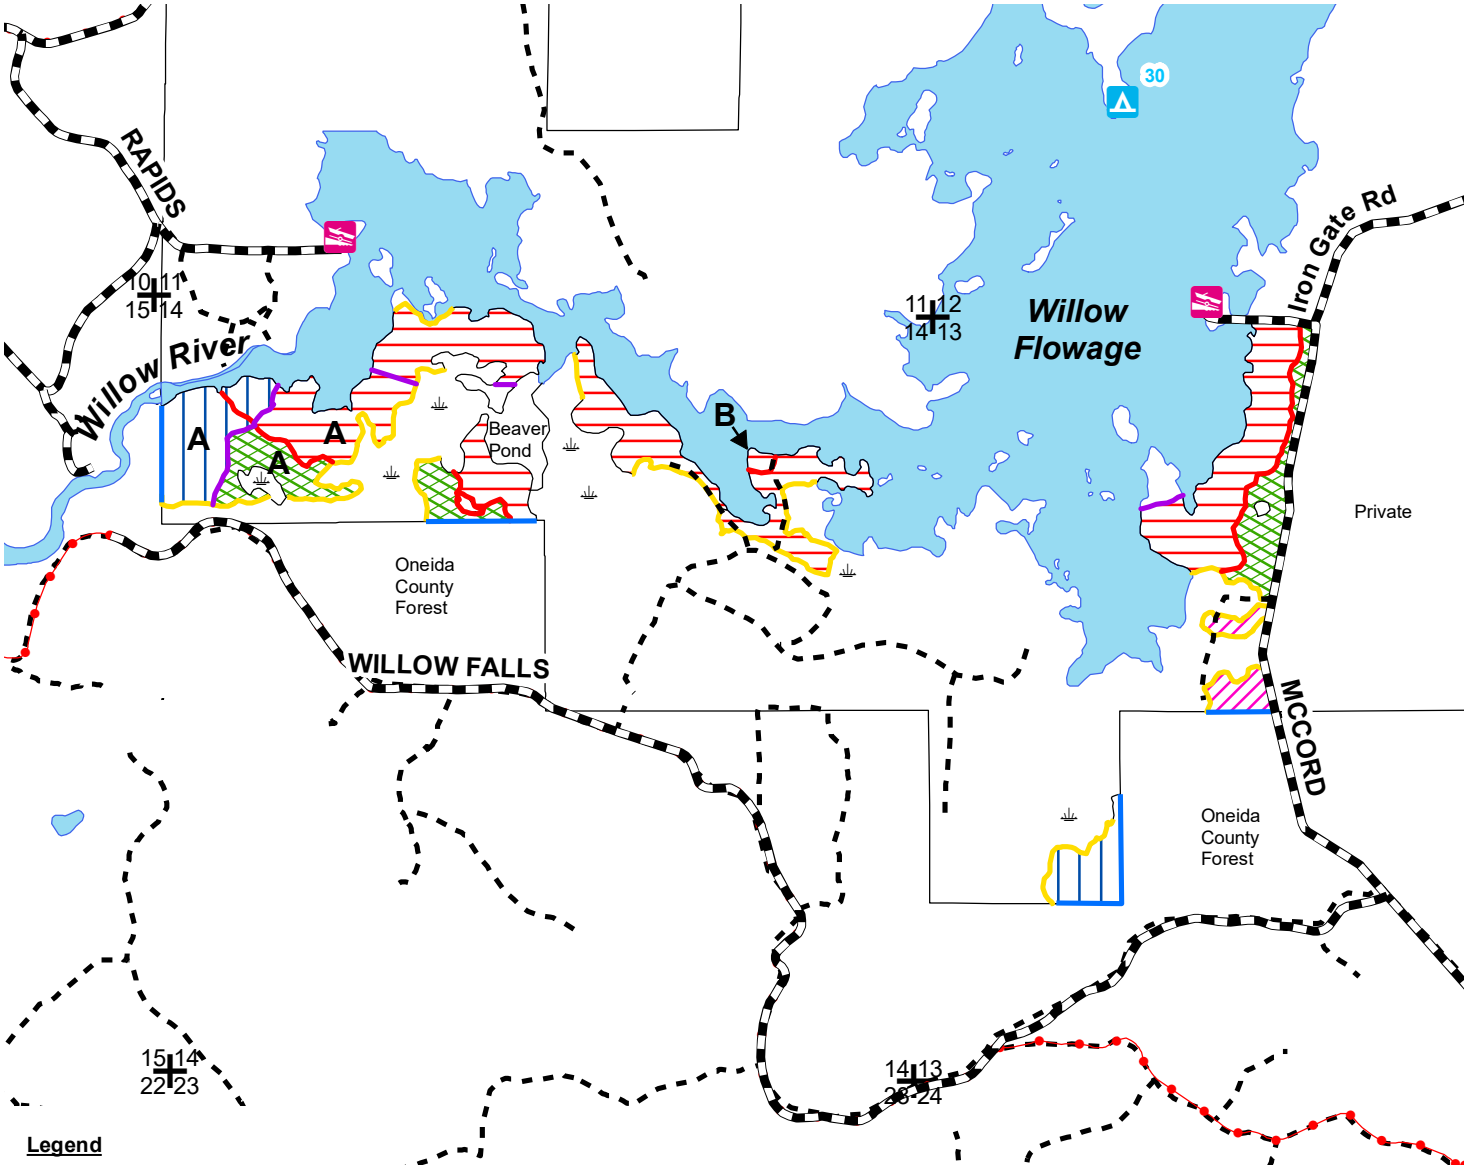

**Legend**

- Red Line
- Yellow Line
- Blue Line
- Purple Line
- Section Corners
- Snowmobile/ATV Trail
- Woods Roads
- Town/County Roads
- Lakes
- Campsite
- Boat Landing
- Wetland

- Scenic Area Thinning (52 acres): Cut all aspen, balsam fir, and orange marked trees. Do NOT cut any trees marked with green paint. Leave a 15' uncut buffer along the edge of all waterbodies.
- Clearcut Area (16 acres): Cut all aspen, balsam fir, white birch, red maple, and orange marked trees. Cut all 1-5" aspen, maple, and white birch.
- Hardwood Thinning (15 acres): Cut all aspen, balsam fir, and orange marked trees. Do NOT cut any green marked trees. Leave a 15' uncut buffer along the edge of the river/flowage.
- Red Pine Thinning (4 acres): Cut all aspen, balsam fir, and orange marked trees.

**Zone A (24 acres): Harvesting is only allowed from October 15 to April 15.**  
**Zone B (1/2 acre): Harvesting is optional, and if done must occur under frozen ground conditions with no stump pulling or other soil disturbances.**

This sale is located within the Willow Forest Production Area and the Flowage Scenic Management Area

N  
  
 4" = 1 mile  
 1:15,840



Map produced by  
 Adam Wallace &  
 Jeff Tracy, 03/21

This map is not a survey of the actual boundary of any property this map depicts.

WILLOW FLOWAGE TRACT NO. 029-21W

Willow Falls

Oneida County

Town 37 North, Range 4 East (Lynne Township)

Section 13 – E1/2NW, NWSW

Section 14 – N1/4, SENE

No bid bond is required.

15% of the total sale bid value or \$1000.00, whichever is greater, will be required for performance bond.

The cutting area is approximately 87 acres.

The contract period is 3 years.

All trees that will yield one or more 100-inch sticks to a 4" top diameter will be cut and utilized.

---

ESTIMATED VOLUME (TONS)  
MINIMUM TOP DIAMETER

| <u>SPECIES</u>              | <u>4"</u> | <u>Whole Tree</u> |
|-----------------------------|-----------|-------------------|
| Red Pine <sup>1</sup>       | 250       |                   |
| Balsam Fir                  | 550       |                   |
| Aspen                       | 1400      |                   |
| Mixed Hardwood <sup>2</sup> | 700       |                   |

**Total Minimum Bid Value: \$26,635.00**

---

<sup>1</sup> Includes <1% white pine.

<sup>2</sup> Approximately 52% red maple, 38% white birch, and 10% sugar maple. (Wt. conv. 2.347 tons/cd)

Note: Total sale volume equates to 33.4 tons/acre or 14.8 cords/acre.

Special Conditions:

1. All pine products cut between May 1 and September 1 must be removed from the sale area within three weeks from time of cutting. Pine products cut during the remainder of the year must be removed prior to May 1 of each year.
2. Cutting must be concurrent for all species.
3. Do not cut, knock down or utilize any dead trees, except they may be cut down along roadways where they pose a safety hazard.
4. Slash within 50 feet of all roads, trails, and waterbodies must be lopped and/or scattered to lie within two feet of the ground and be pulled back 10' behind the tree line concurrently with cutting.
5. Whole tree utilization or biomass harvesting is not allowed.
6. Follow WI BMP's for water quality at all times. No equipment is allowed within 15 feet of waterbodies and no trees are to be cut within 15' of the flowage, river, or beaver pond. Avoid wetlands as much as possible and only operate within them during very dry times with timber matting or under frozen ground conditions. A few small wetland area crossings will be needed within the sale area.
7. Landings and new logging roads generally must be 200' or greater from the flowage. Roads and landings must be approved by the Willow Flowage Property Manager in advance of use.
8. Logging operations within Zone A (approx. 24 acres) are allowed only from October 15 to April 15. Zone B (approx. ½ acre) is optional to cut, and if done must occur under frozen ground conditions with no stump pulling or other soil disturbances.